MITSUBISHI ELECTRIC

Changes for the Better

for a greener tomorrow eco Changes

Open Field Network
CC-Link Family Compatible Product Development Guidebook

CC-Link IE
CC-Link
CC-Link/LT

GLOBAL IMPACT OF MITSUBISHI ELECTRIC

Through Mitsubishi Electric's vision, "Changes for the Better" are possible for a brighter future.

Changes for the Better

We bring together the best minds to create the best technologies. At Mitsubishi Electric, we understand that technology is the driving force of change in our lives. By bringing greater comfort to daily life, maximizing the efficiency of businesses and keeping things running across society, we integrate technology and innovation to bring changes for the better.

Mitsubishi Electric is involved in many areas including the following

Energy and Electric Systems
A wide range of power and electrical products from generators to large-scale displays.

Electronic Devices
A wide portfolio of cutting-edge semiconductor devices for systems and products.

Home Appliance
Dependable consumer products like air conditioners and home entertainment systems.

Information and Communication Systems
Commercial and consumer-centric equipment, products and systems.

Industrial Automation Systems
Maximizing productivity and efficiency with cutting-edge automation technology.

From consulting to the provision of development tools, Mitsubishi Electric is ready to assist you in speedy development of CC-Link Family compatible products.

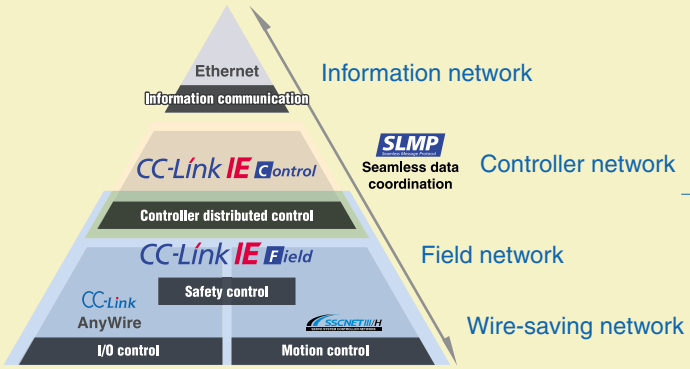

Making your products compatible with CC-Link Family, an open field network originating from Japan, will not only ensure the level of system flexibility distinctively characteristic of multi-vendor products but also provide you with the opportunity to boost the competitiveness of your products to the global level once and for all.

With various certifications, including International Organization for Standardization ISO 15745-5*1, IEC 61158 and IEC 61784*2, SEMI*3, Chinese National Standards GB*4, Korean Industrial Standards KS*5, and Japanese Industrial Standards JIS*6, CC-Link has lived up to its name as a global standard. To ensure quick and certain development of CC-Link family compatible products, such as new generation CC-Link IE Control network and CC-Link IE Field network, Mitsubishi Electric will support you in every phase of development, including the provision of development tools.



*1. "Application Integration Framework"
*2. Industrial Field bus protocol standard
*3. SEMI E54.12 E54.23-0513
*4. GB/T 19760 20299.4
*5. KSBISO15745-5
*6. JIS TR B0031

INDEX

Development Procedure Flowchart ····· P03 to P04

CC-Link Family Configuration ··· P05

Development Method Selection Flowchart ··· P06 to P08

Station Development Guides

[CC-Link IE Control]
◎ Driver Development ····· P09 to P10

[CC-Link IE Field]
◎ Master Station ····· P11 to P12
◎ Intelligent Device Stations and Remote Device Stations··· P13 to P16
◎ Driver Development ····· P17 to P18

[CC-Link]
◎ Master Station, Local Station and Intelligent Device Station P19 to P22
◎ Remote Device Station ····· P23 to P24
◎ Remote I/O Station ····· P25 to P28
◎ Driver Development ····· P29 to P30

[CC-Link/LT]
◎ Master Station ····· P31 to P32
◎ Remote Device Station ··· P33 to P34
◎ Remote I/O Station ····· P35 to P36

Recommended Parts and Specified Parts··· P37 to P39

Technical Information····· P41 to P47

Support System ····· P48

Related Product List ····· P49

Warranty ····· P50

Expanding business with CC-

Recommended path to CC-Link Family compatible product development

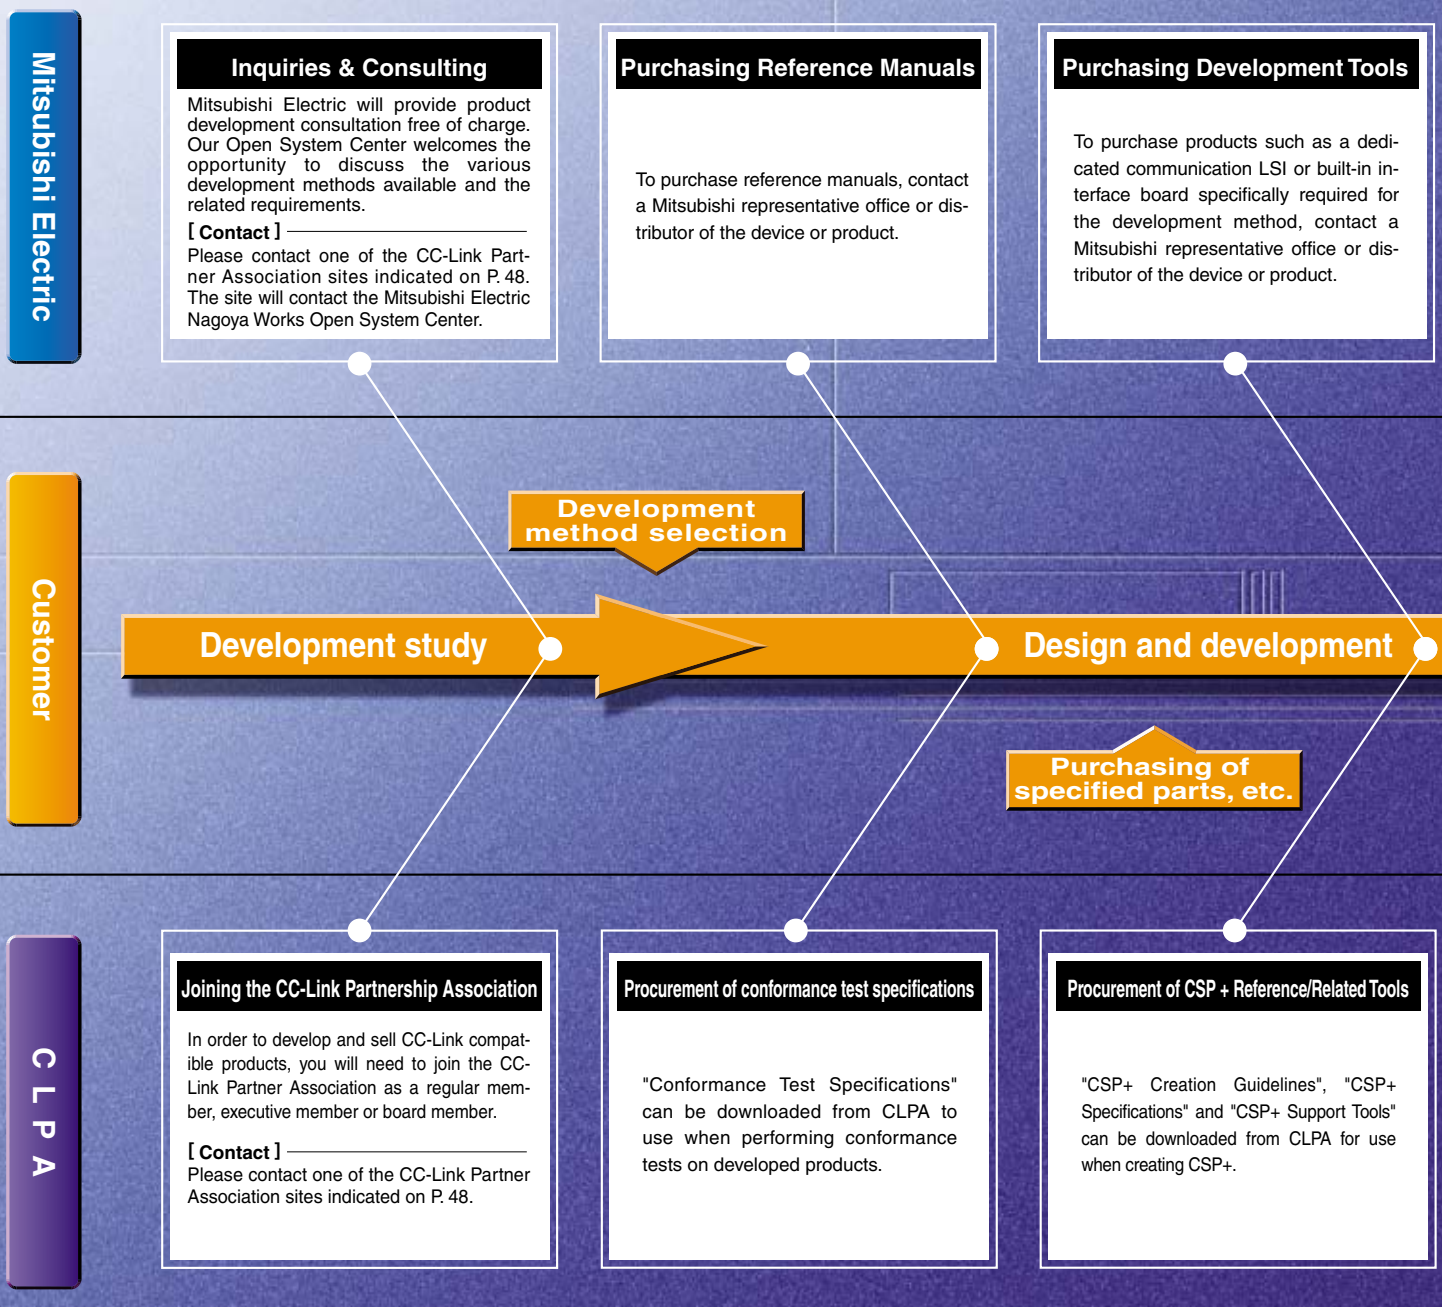

The strongest theme in CC-Link Family compatible product development is the simultaneous pursuit of quality and development speed. This includes the development of dedicated communication LSIs, which requires from the initial stages extreme efficiency with respect to both cost and speed. Mitsubishi Electric prepares development tools, including those for each type of dedicated communication LSI and built-in module, through our comprehensive CC-Link IE, CC-Link, & CC-Link/LT related technologies cultivated to date, and is pleased to offer its support in the development of efficient compatible products. Capable of highly detailed assistance, from consulting during the preparation stage to problem solving during development, Mitsubishi Electric and the CC-Link Partner Association (CLPA) are eager to serve you as your partners.

* CSP+: Control & Communication System Profile

In all

Link Family.

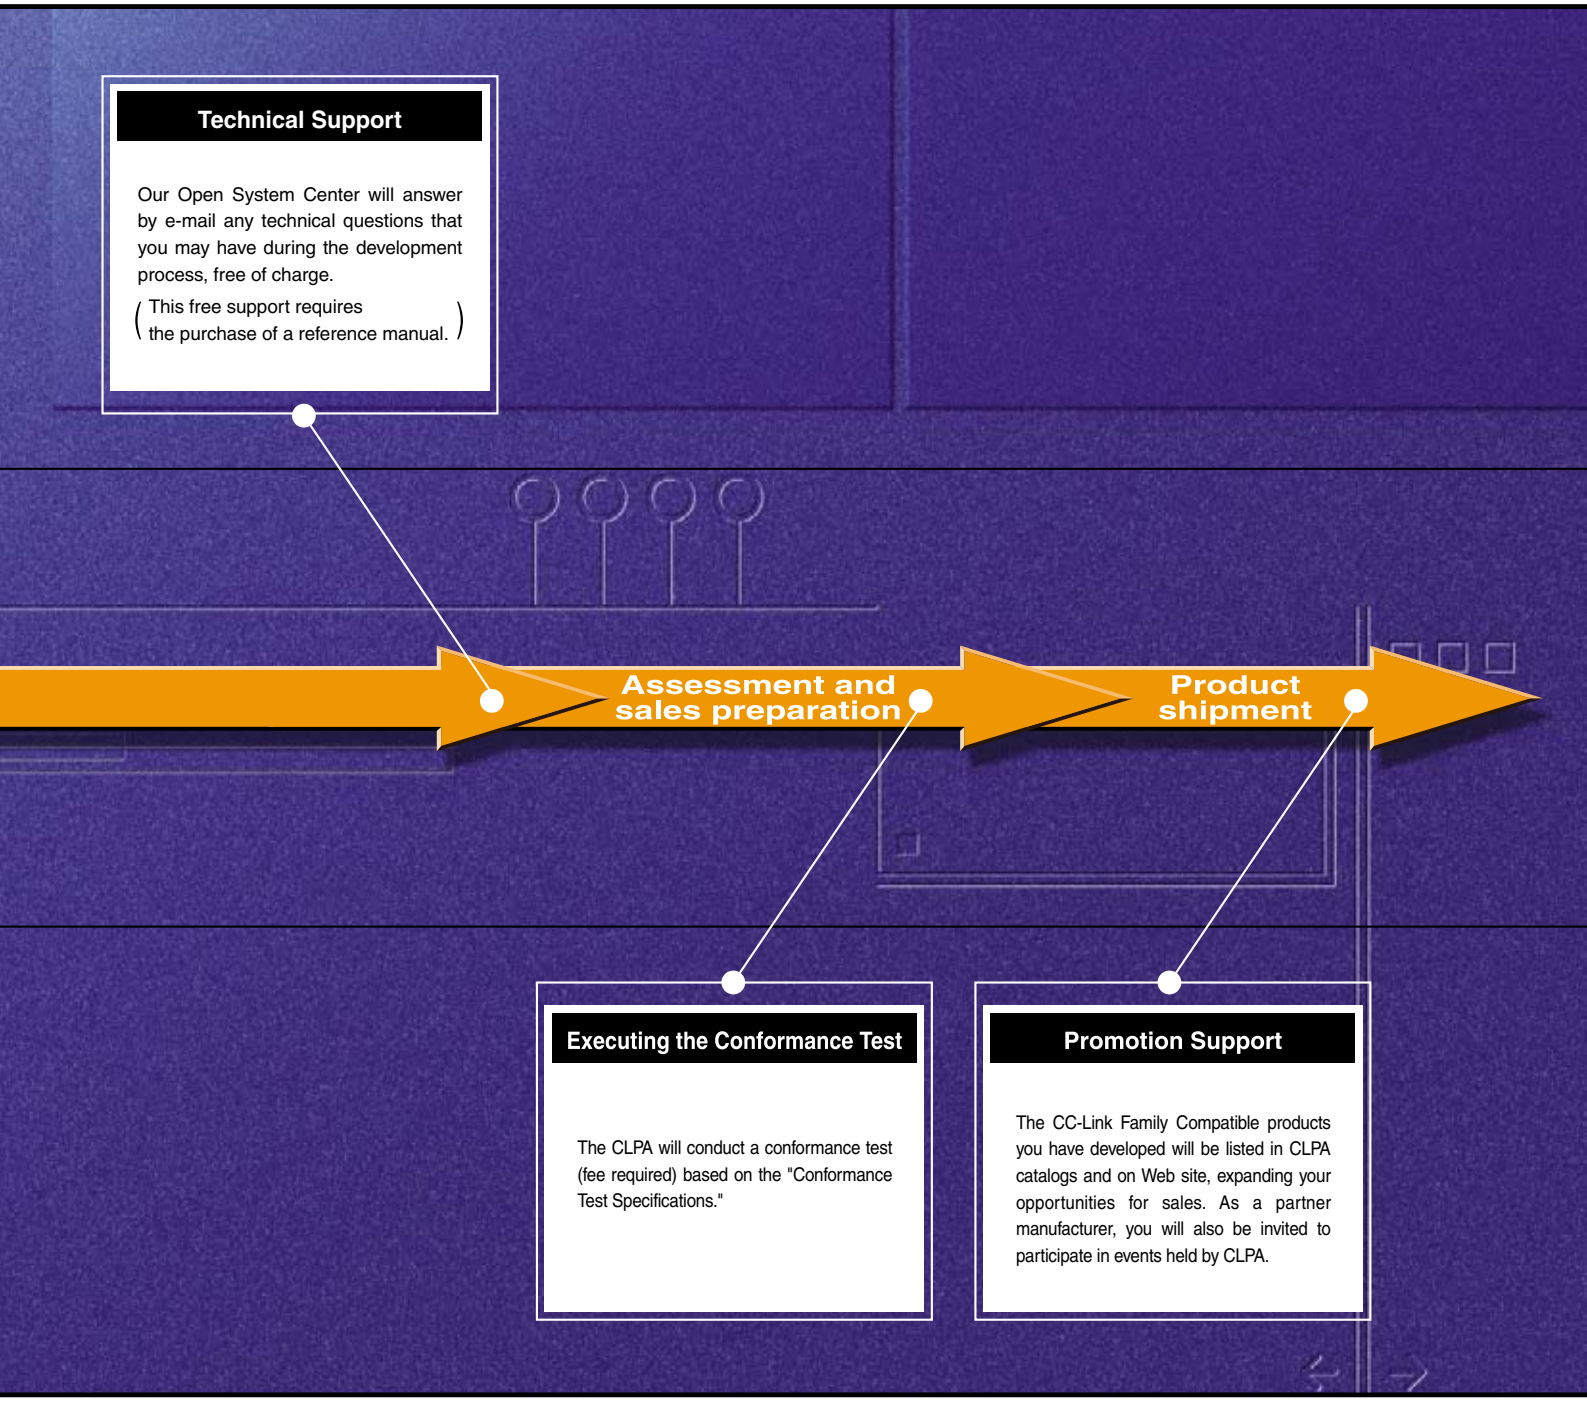

areas of development, Mitsubishi Electric offers you solid support.

Progressing of CC-Link Family.

The CC-Link family continually progresses, responding to the various needs of industrial networks.

From Ethernet-based controller networks to field networks and cabinet interior wire-saving networks, the CC-Link family has openly increased its industrial networkability.

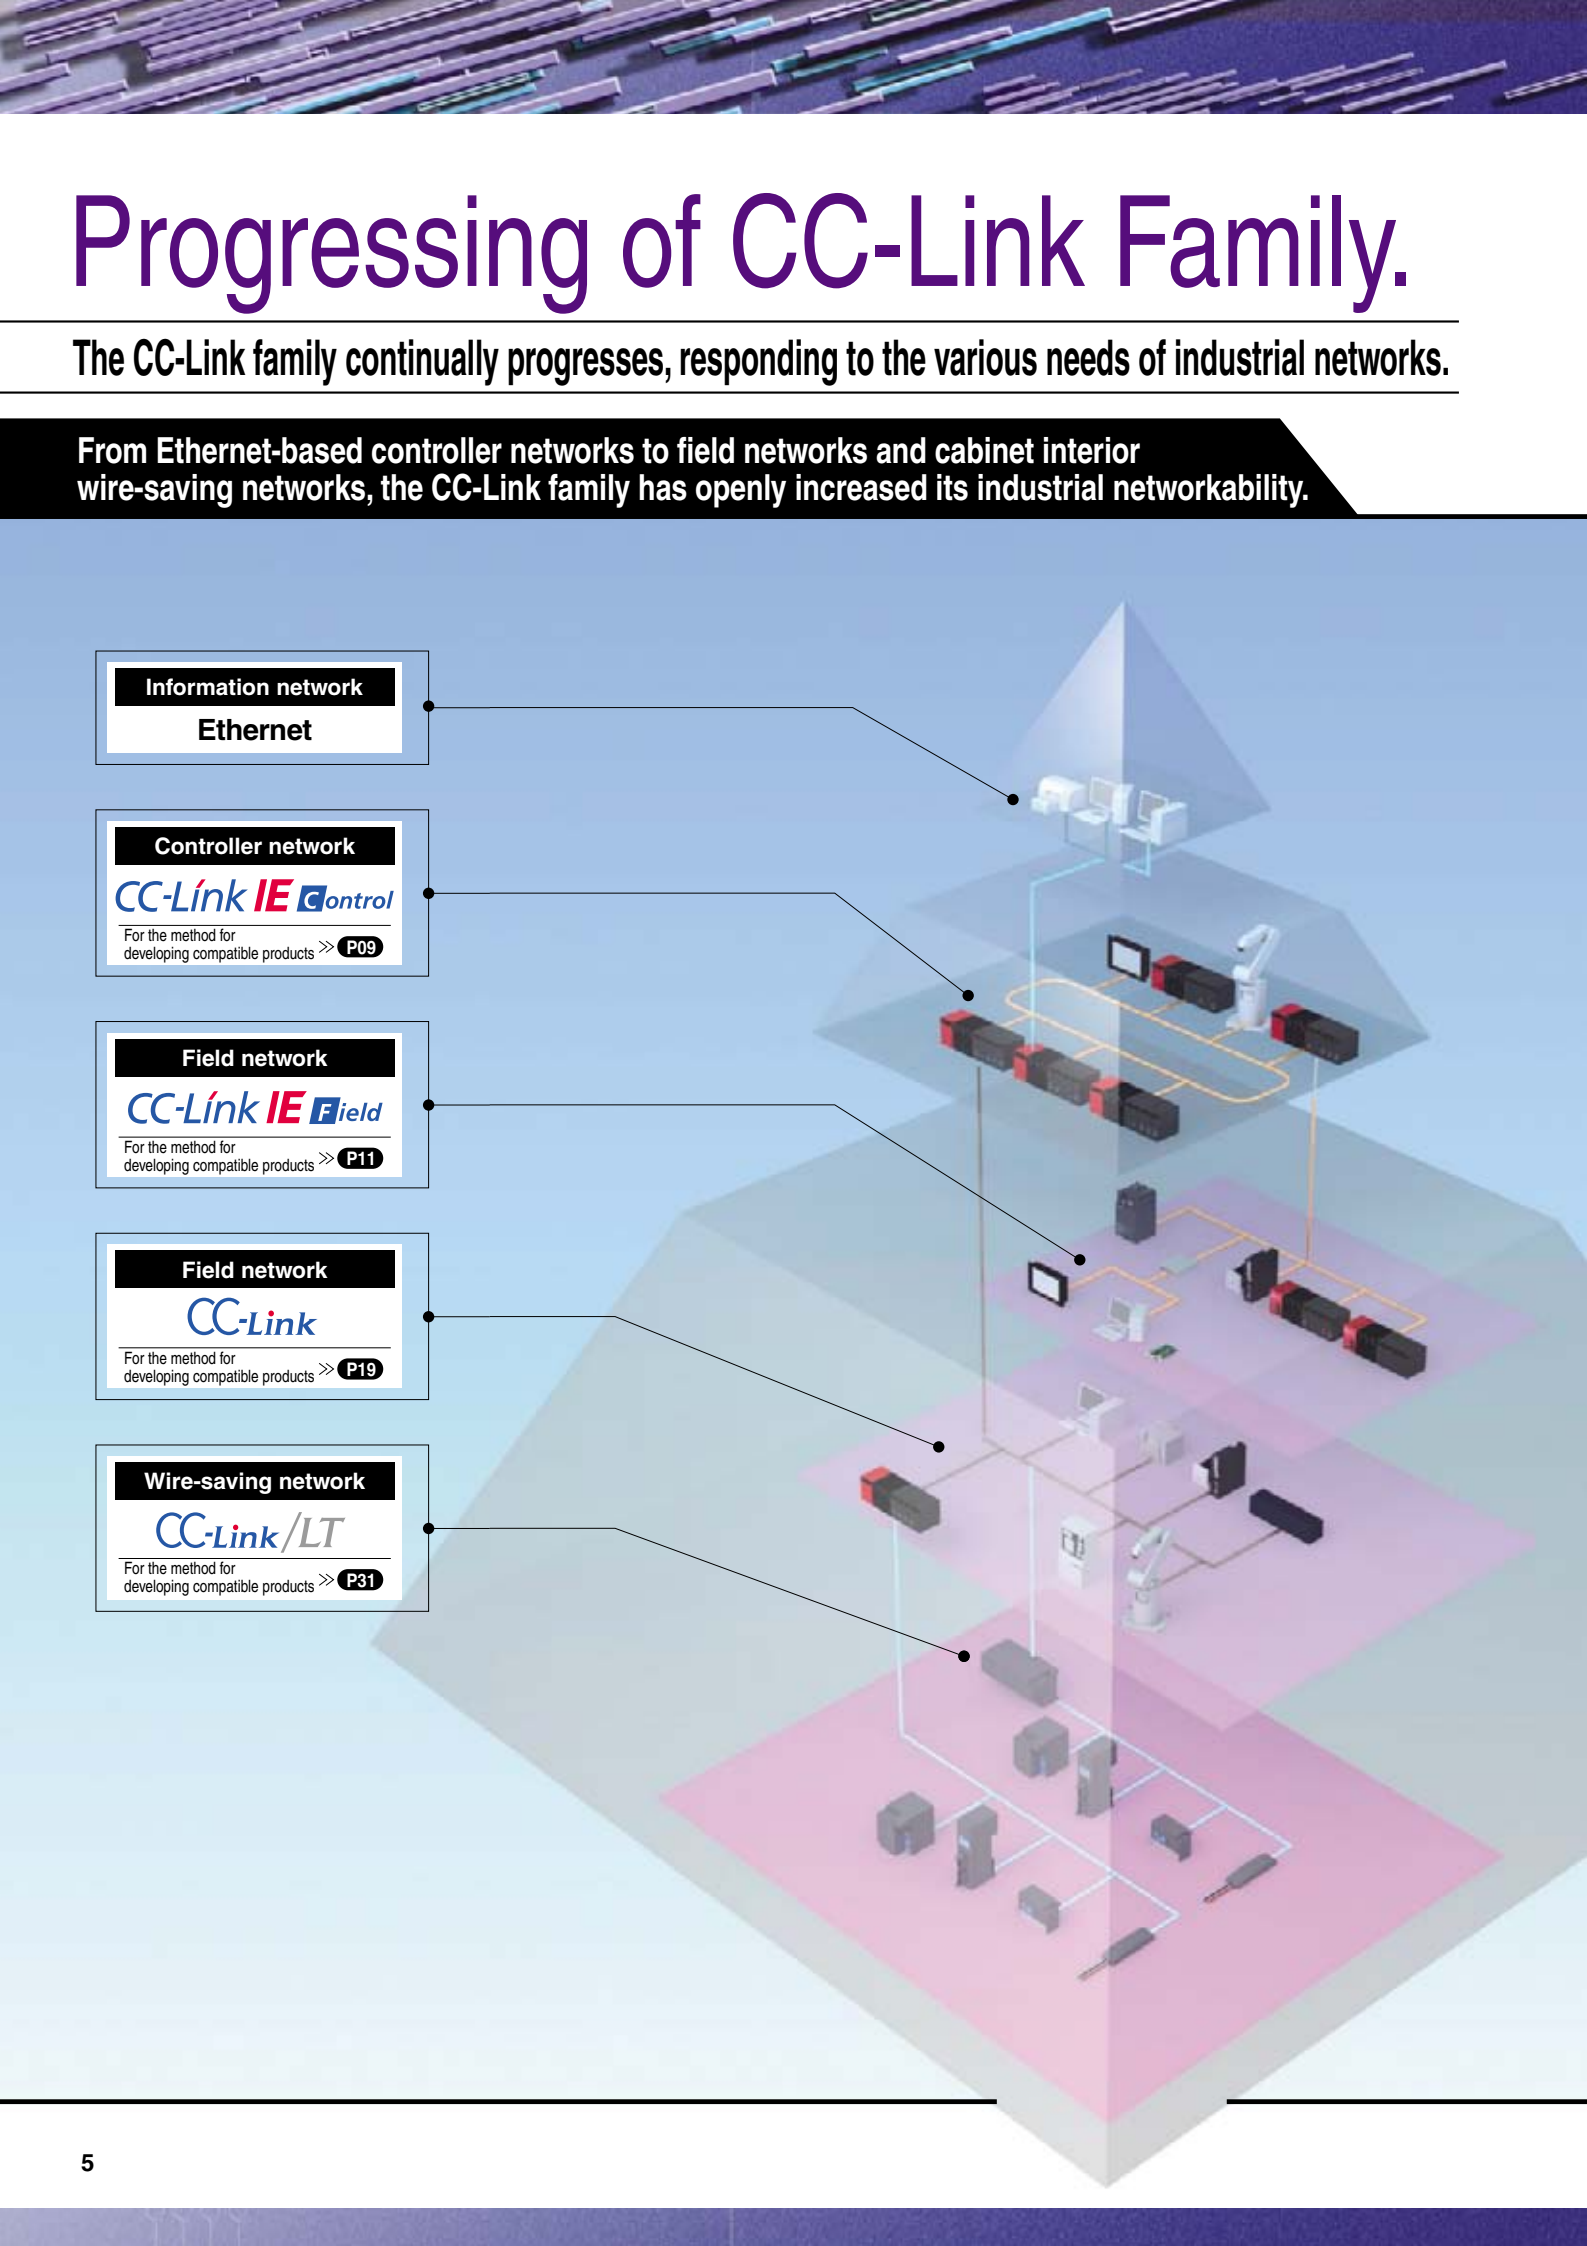

Ethernet & Gigabit.

Mitsubishi Electric supports speedy development of Ethernet-based integrated network CC-Link IE compatible products.

CC-Link IE Control

I want to support CC-Link IE Control using a PC interface board (PCI board)

Driver Development P09 to P10

Driver Development*1

Drivers for various operating systems can be developed for use of the Mitsubishi PC interface board (Q80BD-J71GP21-SX).

Purchase reference manual

CC-Link IE Field

I want to develop a CC-Link IE Field master station.

Master Station P11 to P12

Source Code Development

Develop a master station using source codes.
A master station can be designed with higher flexibility by combining source codes and communication LSI.

Contract | Purchase reference manual | Purchase dedicated LSI | Conformance test

I want to develop a CC-Link IE Field intelligent device station or remote device station.

Intelligent Device Station, Remote Device Station P13 to P16

Communication LSI CP520 with GbE-PHY

This LSI integrates the CC-Link IE Field network communication ASIC, MPU and GbE-PHY.
CP520 allows you to develop devices that perform cyclic transmission and transient transmission without concern about protocol.
CP520 is controlled with software.

Purchase reference manual | Purchase dedicated LSI | Conformance test

Dedicated communication LSI CP220*

CP220 is a communication LSI that allows you to develop devices that perform cyclic transmission and transient transmission without concern about protocol. It is applicable also to the motion function.
CP220 is controlled with software.

* CP220 is designed for development of intelligent device stations.

Purchase reference manual | Purchase dedicated LSI | Conformance test

I want to develop a CC-Link IE Field master station and local station using a PC interface board.

Driver Development P17 to P18

Driver Development*1

Drivers for various operating systems can be developed for use of the Mitsubishi PC interface board (Q80BD-J71GF11-T2/ Q81BD-J71GF11-T2).

Purchase reference manual

*1 CC-Link Partner Association membership is not always necessary. For details, contact your local CLPA office.

It's Easy & Speedy.

Mitsubishi Electric provides development methods tailored to the CC-

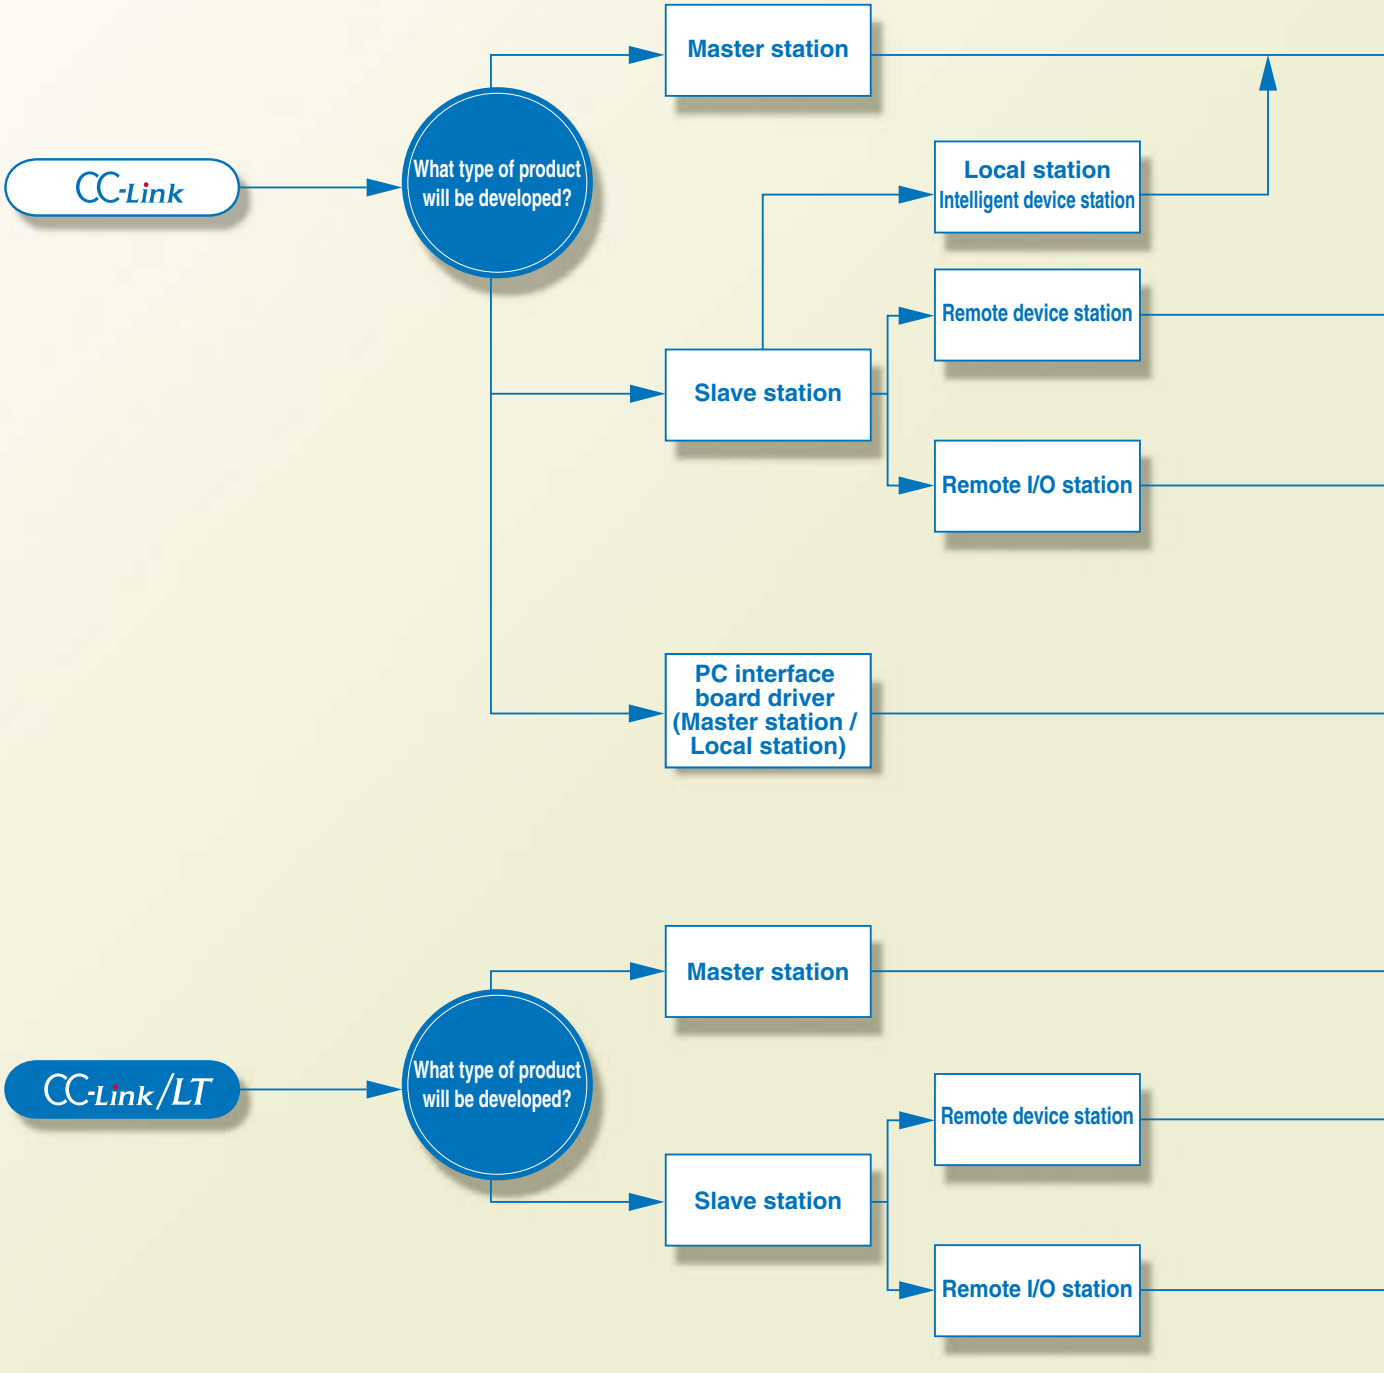

Link & CC-Link/LT compatible product type.

CC-Link

Master Station, Local Station, Intelligent Device Station

P19 to P22

Built-in interface board Q50BD-CCV2

In this method, stations are developed using a built-in interface board. The CC-Link master station, local station and intelligent device station functions are realized by mounting the interface board on a user circuit board.

Purchase reference manual | Purchase specified parts | Conformance test

Object development

In this method, stations are developed using the object code and the device kit. By developing with object codes, a design with higher flexibility can be achieved compared to using the built-in interface board.

Contract | Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

Remote Device Station

P23 to P24

Dedicated communication LSI MFP3N

MFP3N is a communication LSI that allows you to develop devices that handle bit data and word data without concern about protocol. MFP3N is controlled with software. Support of both CC-Link Ver. 1 and Ver. 2 is possible by changing the software.

Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

Remote I/O Station

P25 to P28

Dedicated communication LSI MFP2N/MFP2AN

MFP2N and MFP2AN are communication LSIs that allow you to develop devices that handle bit data without concern about protocol. The two types are provided for different package sizes (number of pins) and I/O point quantity.

Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

Embedded I/O Adapter*1*2

This small-sized Embedded adapter allows you to develop devices that handle bit data without concern about protocol. The adapter can be mounted directly on the circuit board you developed, and allows expansion of the number of I/O points through cascade connection. (A maximum of two adapters can be mounted on a single circuit.)

Purchase reference manual | Conformance test

Driver Development

P29 to P30

Driver development*1

Drivers for various operating systems can be developed for use of the Mitsubishi PC interface board (Q80BD-J61BT11N).

Purchase reference manual

CC-Link/LT

Master Station

P31 to P32

Dedicated communication LSI CLC13

CLC13 is a communication LSI that allows you to develop devices compliant with the master station used for network management. The network can be constructed by connecting the various slave stations.

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

Remote Device Station

P33 to P34

Dedicated communication LSI CLC31

CLC31 is a communication LSI that allows you to develop devices that handle word data (16-bit data). The data amount of four words can be handled by a single LSI, allowing development of analog I/O and other remote device stations.

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

Remote I/O Station

P35 to P36

Dedicated communication LSI CLC21

CLC21 is a communication LSI that allows you to develop devices that handle bit data without concern about protocol. This LSI enables development of digital I/O and other remote I/O stations.

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

*1. CC-Link Partner Association membership is not always necessary. For details, contact your local CLPA office.
*2. The conformance test is sometimes not required. For details, contact your local CLPA office.

CC-Link IE Control

Developing Drivers for the Various Operating Systems of CC-Link IE Control Network PC Interface Board

Purchase reference manual

Q80BD-J71GP21-SX Driver Development

■Manual

■Conceptual Diagram

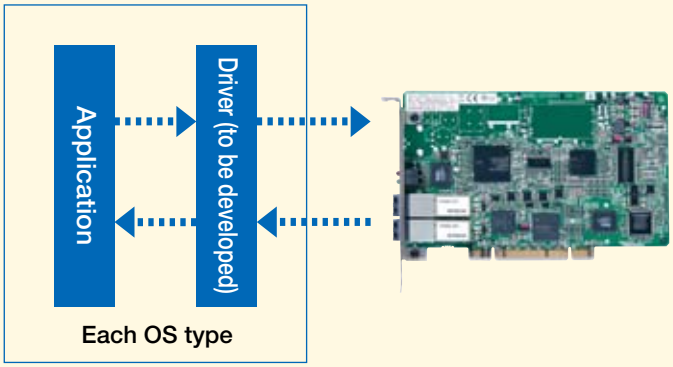

1. Developing a driver for the various operating systems enables use of the CC-Link IE Control Network compatible PC interface board as a control station or normal station.

2. The CC-Link IE Control Network Q80BD-J71GP21 Driver Development Reference Manual helps you develop a PC interface board Q80BD-J71GP21-SX driver compatible with the various operating systems.

3. The reference manual describes the hardware information (PCI configuration area, 2-port memory area, and hardware control memory area memory map) and software information (driver initialization procedure and parameter setup procedure) required for driver development.

4. This reference manual includes sample programs (C language), making it possible to reduce development costs and shorten development man-hours.

•Upon request, software development partners are introduced.

■Manual

Title	Manual No.
CC-Link IE Q80BD-J71GP21-SX Driver Development Reference Manual	SH(NA)-080819ENG

CC-Link IE Control

CC-Link IE Control Network PC Interface Board

Q80BD-J71GP21-SX/Q80BD-J71GP21S-SX, Q81BD-J71GP21-SX/Q81BD-J71GP21S-SX

1. The interface board allows you to incorporate personal computers into the CC-Link IE Control Network.
   The interface board allows you to use a personal computer as a control station or normal station within a CC-Link IE Control Network when mounted.

2. The interface board enables simple parameter setup.
   Using the CC IE Control utility enables simple setup of the parameters required for CC-Link IE Control Network operation.

3. The interface board displays test information and monitor information related to the CC-Link IE Control Network system.
   The interface board enables simple display of CC-Link IE Control Network system related test and monitor status information on the personal computer.

4. The interface board offers RCPU and QCPU multiple CPU system compatibility.
   The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC IE Control utility.

■ **Q80BD-J71GP21-SX**

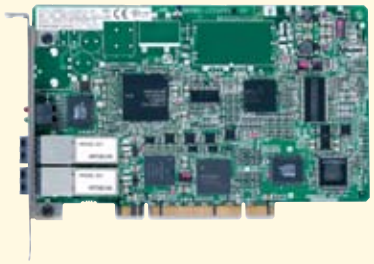

■ **Q81BD-J71GP1-SX**

Item	Q80BD-J71GP21-SX Q80BD-J71GP21S-SX	Q81BD-J71GP21-SX Q81BD-J71GP21S-SX
Station type	Control station or normal station	
Number of boards that can be installed	Up to 4	
Installation slot	PCI slot or PCI-X slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (half size)
PCI bus / PCI Express® bus specifications	PCI Standard Rev. 2.2 (3.3 VDC / 5 VDC, 32-bit bus, Basic clock: 33 MHz)	PCI Express® Standard Rev. 1.1 (3.3 VDC, link width: 1 lane, Basic clock: 100 MHz)
No. of occupied slots	1 slot	
Internal current consumption	1.10A (5 VDC)	2.07A (3.3 VDC)
Weight	Q80BD-J71GP21-SX: 0.12 kg Q80BD-J71GP21S-SX: 0.14 kg	Q81BD-J71GP21-SX: 0.13 kg Q81BD-J71GP21S-SX: 0.14 kg
Included software	Windows® software package (1 CD-ROM)*	

* For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.

Products that do not include a Windows® software package (CD-ROM) are also available.
For details, contact your local dealer network.

CC-Link IE Field

Developing Master Stations

CC-Link IE Field Network Source Code Development

The items shown on the right allow you to develop CC-Link IE Field Network master stations without concern for the protocol.*1

1. CP210 is a dedicated communication LSI for the master station of a CC-Link IE Field Network.
2. CP210 supports cyclic transmission (RX/RY: 16384 bits each; RWr/RWw: 8192 words each) and transient transmission. The network can be wired into star topology, line topology, and a combination of star and line topologies.*2
3. Parts are not particularly specified, allowing free parts selection. The source code can be customized in accordance with hardware specifications of the user board and application.
4. The source code development CD-ROM includes C-language source code and circuit examples (PDF), making it possible to reduce development costs and shorten the development process.

*1 Local stations are not supported.

*2 Ring topologies are not supported.

- Upon request, hardware and software development partners are introduced.
- Lead-free / RoHS directive compliant
- Use of this product requires conclusion of the license agreement with Mitsubishi Electric.

■Source Code

■Manual

■Dedicated Communication LSI (CP210)

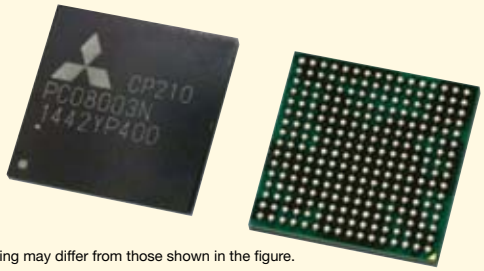

*Actual printing may differ from those shown in the figure.

■Source Code

Name	Model
Source Code Development CD-ROM	SW1DNC-EFI210SRC

*Source code operation has been verified using the recommended environment.

■Dedicated Communication LSI (CP210)

Name	Model	Packaging Unit
CP210 (PC08003N)	NZ2GACP210-60	60 pieces
	NZ2GACP210-300	30 pieces

■Manual

Title	Manual Number
CC-Link IE Field Network Source Code Development Master Station Communication LSI CP210 Reference Manual	SH(NA)-081455ENG

■Recommended Environment

Item	Manufacturer	Product Name	Remarks
Compiler	Green Hills Software, Inc.	C/C++ CROSS V800 COMPILER	•Compiler version : v4.2.3-A5 •This compiler is included in the integrated development environment "MULTI".
OS	Renesas Electronics Corporation	RX850	•Version3.20 •µITRON 3.0 specifications compliant

Contract | Purchase reference manual | Purchase dedicated LSI | Conformance test

■General Block Diagram

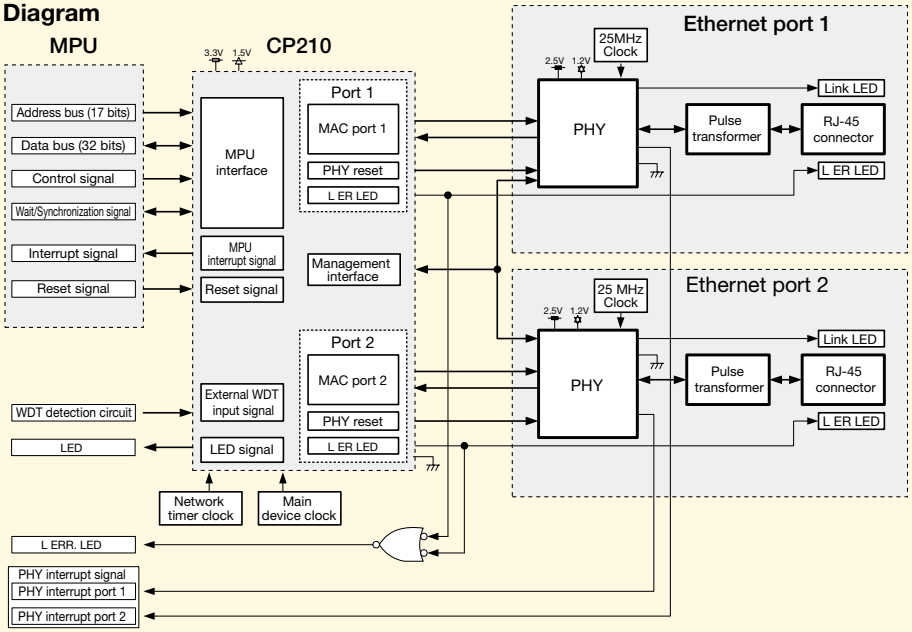

■Basic Specifications of Source Code Development Application Circuit

Classification	Item	Description
Control area	MPU	V850E/ME2(UPD703111BGM-15-UEU-A) LFQFP 176pins*1
Memory*2	ROM	FlashROM : 2M words × 16 bits (32 Mbits)
	RAM	SDRAM : 4 banks x 2M words x 16 bits x 2 (256 Mbits)
Communication area	Dedicated communication LSI	CP210 (PC08003N) BGA 256pins
Display area	LED	RUN, RD ,SD, D LINK ,ERR., L ERR., MST, User LED, LINK, L ER*3

*1 An MPU in which source code operation has been verified.
*2 The memory capacity is the capacity achieved in an environment in which operation has been verified by Mitsubishi Electric. The target memory size when the contents of the source code development CD-ROM are compiled in the recommended environment is 0.5M words (8M bits) of ROM and 4M words (64M bits) of RAM.
*3 The LED layout, colors, and shapes are not specified.

■External Dimensions

*Actual printing may differ from those shown in the figure.

Package: 256 pins Plastic BGA (Ball grid array) Shape: 17 x 17 mm, 1 mm between pins

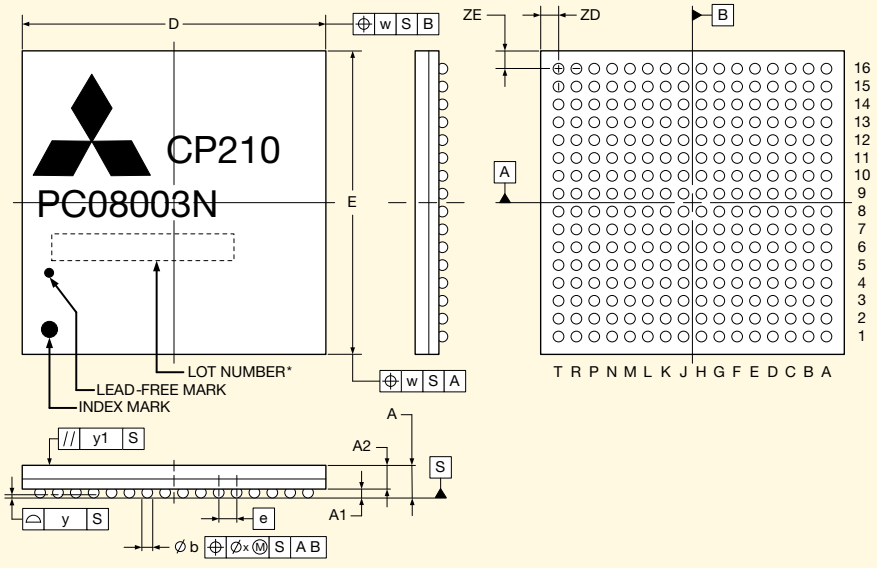

(UNIT: mm)

ITEM	DIMENSIONS
D	17.00±0.20
E	17.00±0.20
w	0.30
e	1.00
A	1.83±0.20
A1	0.50±0.10
A2	1.33
b	0.60±0.10
x	0.10
y	0.15
y1	0.35
ZD	1.00
ZE	1.00

CC-Link IE Field

Developing Intelligent Device Stations and Remote

Communication LSI CP520 with GbE-PHY

CP520 is an LSI that integrates the CC-Link IE Field Network communication ASIC, MPU, and GbE-PHY. This integrated LSI allows you to reduce MPU and GbE-PHY related development costs and manhours.
CP520-based development offers the following features:

1. CP520-based development allows you to develop an intelligent device station or remote device station for CC-Link IE Field Network without awareness of protocol.
2. Integrated with GbE-PHY, CP520-based development does not require pattern design between the CC-Link IE Field Network communication ASIC and GbE-PHY. As a result, the pattern design of the CC-Link IE Field Network communication circuit is simplified. This development decreases the number of MPU and GbE-PHY peripheral components and circuits, achieving a decrease in the size of the developed circuit board compared to conventional products.
3. A sample code is provided that can be easily customized in accordance with user hardware specifications and applications. This makes it easy to develop a CC-Link IE Field Network compatible product with user-defined functions.
4. CP520 includes HW-RTOS, reducing the MPU load and achieving low power consumption in the developed device.

- The manual and sample code can be downloaded from the Mitsubishi Electric Factory Automation Website.
- Upon request, hardware and software development partners are introduced.
- Lead-free/RoHS directive compliant

Communication LSI with GbE-PHY (CP520)

*Actual printing may differ from those shown in the figure.

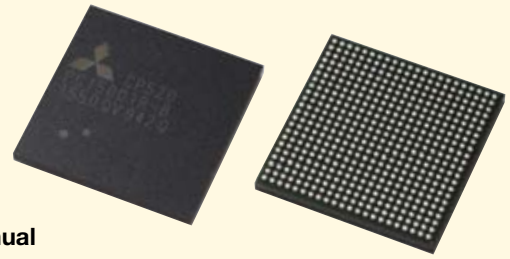

Manual

General Block Diagram

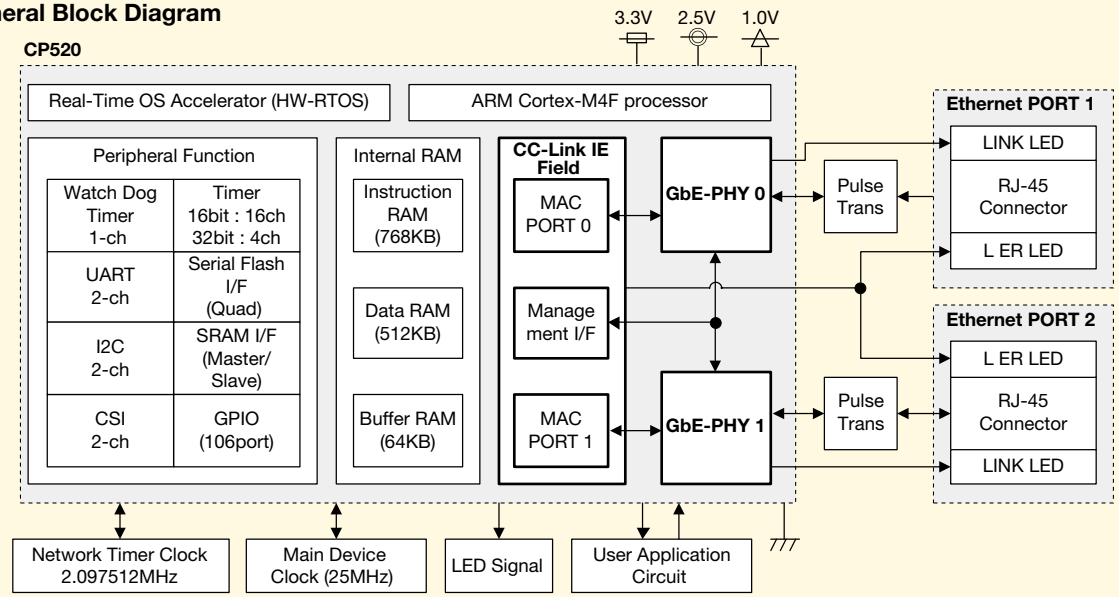

Device Stations

Purchase reference manual | Purchase dedicated LSI | Conformance test

■External Dimensions

*Actual printing may differ from those shown in the figure.

Package: 484 pins Plastic BGA (Ball grid array) Shape: 23 x 23 mm, 1 mm between pins

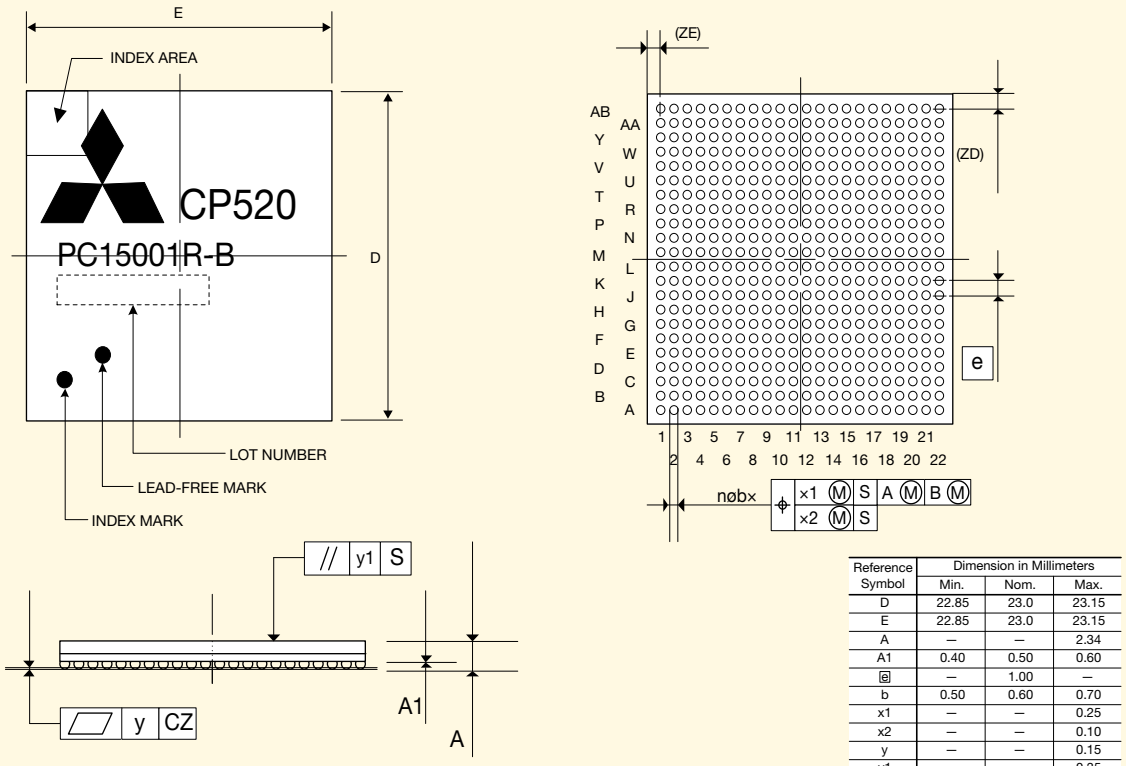

Reference Symbol	Dimension in Millimeters		
	Min.	Nom.	Max.
D	22.85	23.0	23.15
E	22.85	23.0	23.15
A	—	—	2.34
A1	0.40	0.50	0.60
e	—	1.00	—
b	0.50	0.60	0.70
x1	—	—	0.25
x2	—	—	0.10
y	—	—	0.15
y1	—	—	0.35
n	—	484	—
ZD	—	1.0	—
ZE	—	1.0	—

■Communication LSI with GbE-PHY (CP520)

Name	Model	Packaging Unit
CP520 (PC15001R-B)	NZ2GACP520-60	60 pieces
	NZ2GACP520-300	300 pieces

■Manual

Title	Manual No.
CC-Link IE Field Network Intelligent Device Station and Remote Device Station Communication LSI CP520 with GbE-PHY Reference Manual	SH(NA)-081570ENG

CC-Link IE Field

Developing Intelligent Device Stations and Remote

Dedicated Communication LSI CP220

The items shown on the right allow you to develop CC-Link IE Field Network products without concern for the protocol.

1. CP220 is a dedicated communication LSI for the intelligent device station of a CC-Link IE Field Network.
2. CP220 supports cyclic transmission (RX/RY: 2048 bits each; RWr/RWw: 1024 words each) and transient transmission.
3. Intelligent device stations compatible with the Motion function of CC-Link IE Field Network can be developed.
4. CP220 automatically performs a major portion of the communication functions, thereby reducing the MPU (microcomputer) load and enabling designs that employ low-performing MPUs as well. (Select a little endian type MPU that has a data bus width of at least 16 bits and an address bus width of at least 17 bits.)
5. The CD-ROM that comes with the reference manual includes C-language sample code and circuit examples (PDF), making it possible to reduce development costs and shorten the development process.

•Upon request, hardware and software development partners are introduced.

•Lead-free/RoHS directive compliant

■Dedicated Communication LSI (CP220)

*Actual printing may differ from those shown in the figure.

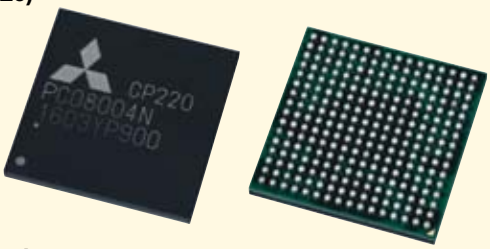

■Manual

■General Block Diagram

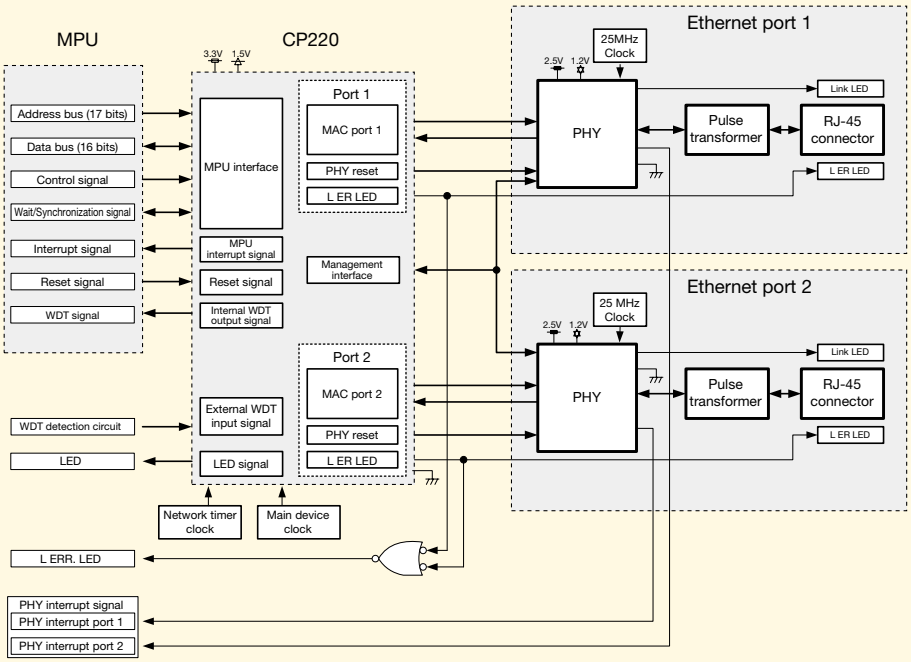

Device Stations

Purchase reference manual | Purchase dedicated LSI | Conformance test

External Dimensions

*Actual printing may differ from those shown in the figure.

Package: 256 pins Plastic BGA (Ball grid array) Shape: 17 x 17 mm, 1 mm between pins

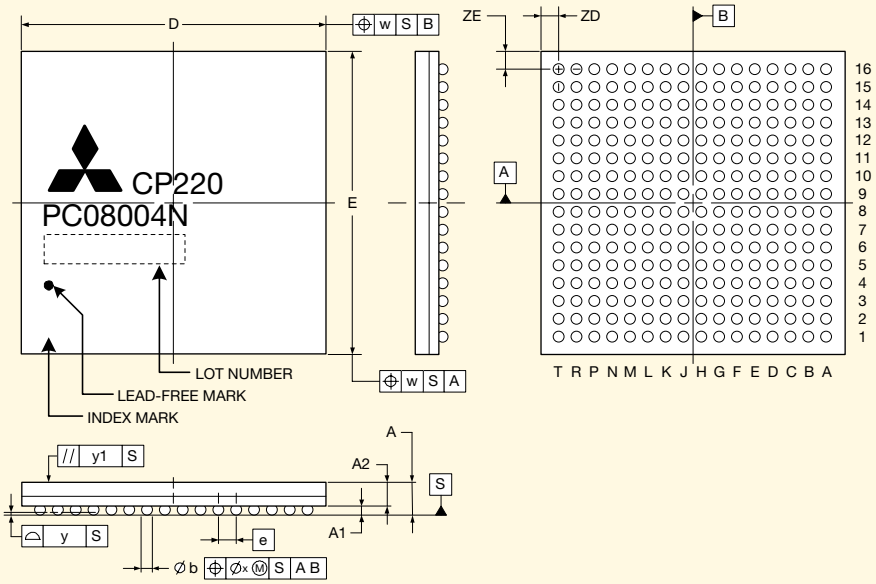

(UNIT: mm)

ITEM	DIMENSIONS
D	17.000.20
E	17.000.20
w	0.30
e	1.00
A	1.83 0.20
A1	0.500.10
A2	1.33
b	0.600.10
x	0.10
y	0.15
y1	0.35
ZD	1.00
ZE	1.00

Dedicated Communication LSI (CP220)

Name	Model	Packaging Unit
CP220 (PC08004N)	NZ2GACP220-60	60 pieces
	NZ2GACP220-300	300 pieces

Manual

Title	Manual No.
CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual	SH(NA)-081017ENG
CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual (Motion function)	SH(NA)-030204ENG

*Provides circuit examples, timing charts, and firmware development methods.

CC-Link IE Field

Developing Drivers for the Various Operating Systems of CC-Link IE Field Network PC Interface Board

Purchase reference manual

Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development

■Manual

■Conceptual Diagram

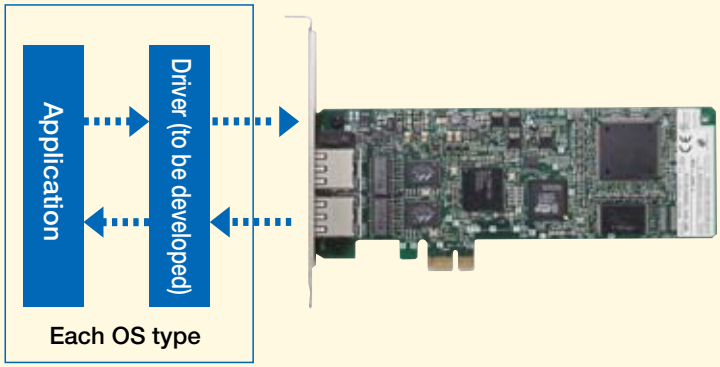

1.Developing a driver for the various operating systems enables use of the CC-Link IE Field Network compatible PC interface board as a master station or local station.

2.The CC-Link IE Field Network Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development Reference Manual helps you develop a PC interface board Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 driver compatible with the various operating systems.

3.The reference manual describes the hardware information (PCI configuration area, 2-port memory area, and register area memory map) and software information (driver initialization procedure and parameter setup procedure) required for driver development.

4.This reference manual includes sample programs (C language), making it possible to reduce development costs and shorten development man-hours.

•Upon request, software development partners are introduced.

■Manual

Title	Manual No.
CC-Link IE Field Network Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development Reference Manual	SH(NA)-081155ENG

CC-Link IE Field

CC-Link IE Field Network PC Interface Boards

Q80BD-J71GF11-T2/Q81BD-J71GF11-T2

1. The interface board allows you to incorporate personal computers into the CC-Link IE Field Network.
   The interface board allows you to use a personal computer as a master station or local station within a CC-Link IE Field Network when mounted.
2. The interface board enables simple parameter setup.
   Using the CC IE Field utility enables simple setup of the parameters required for CC-Link IE Field Network operation.
3. The interface board enables system control and high-speed data collection.
   For a reduction of takt time in a manufacturing system, control data, logging data of manufacturing processes, management data for traceability, and management/diagnostic data for equipment predictive maintenance can be collected at high speed and monitored.
   A control system using a programming language such as C language can be configured when a personal computer is used as a master station.
   Control data and logging data can be collected at high speed when a personal computer is used as a local station.
4. The interface board allows you to check CC-Link IE Field Network status on the screen.
   The status of CC-Link IE Field Network can be checked using CC IE Field Utility. Error locations, error causes, and event history are displayed on the screen. This helps to reduce the time for the system to recover from the error.
5. The interface board offers RCPU and QCPU multiple CPU system compatibility.
   The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC IE Field utility.

■Q80BD-J71GF11-T2

■Q81BD-J71GF11-T2

■Specifications

Item	Q80BD-J71GF11-T2	Q81BD-J71GF11-T2
Station type	Master station or local station	
Number of boards that can be installed	Up to 4	
Installation slot	PCI slot or PCI-X slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (Standard/Low profile, half size)
PCI bus / PCI Express® bus specifications	PCI Standard Rev. 2.2 (3.3/5 VDC, 32-bit bus, Reference clock: 33 MHz)	PCI Express® 1.1 Standard (3.3 VDC, Maximum data bandwidth: 250 MB/s, Reference clock: 100 MHz)
No. of occupied slots	1slot	
Internal consumption current	1.10 A (5 VDC)	1.68 A (3.3 VDC)
Weight	0.11 kg	Standard size: 0.08 kg, Low profile size: 0.07 kg
Included software	Windows® software package (1 CD-ROM)*	

* For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.

Products that do not include a Windows® software package (CD-ROM) are also available.
For details, contact your local dealer network.

CC-Link

Developing Master Stations, Local Stations and

CC-Link Ver.2 Built-in Interface Board Q50BD-CCV2

1. The CC-Link Ver.2 built-in interface board enables development of master stations, standby master stations, local stations and intelligent device stations.
   CC-Link master station, standby master station, local station and intelligent device station functions can be realized by mounting the interface board onto the user circuit board (user application circuit).

2. The interface board is compatible with CC-Link Ver.2.
   With CC-Link Ver.2, the maximum number of cyclic data can be extended to 8192 bits for RX/RY and 2048 words for RWr/RWw. CC-Link Ver.2 is also compatible with old specifications (Ver.1).

3. Minimal space is required.
   The interface board is designed with a compact size of 70mm x 80mm.

4. Communication with user application circuit can be performed using a general-purpose bus interface.
   The interface between the user application circuit and the interface board is comprised of general memory control signals (address bus, data bus, read, write, etc.), making communication with the user application circuit easy.

•Upon request, hardware and software development partners are introduced.
•Lead-free/RoHS directive compliant

■Built-in interface board (Q50BD-CCV2)

■Manual



■Configuration example of the built-in interface board and the user circuit board (user application circuit)

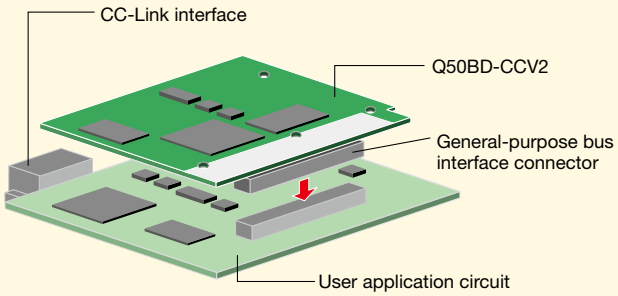

■Built-in interface board basic specifications

Classification	Item	Description
Control area	Bus interface	General-purpose bus interface
	MPU	SH3 (SH7708R) QFP 144 pins
Memory	ROM	ROM 512K words x 16 bits (8Mbits)
	SRAM	Dual port RAM 32K words x 16 bits (512Kbits)
		Work RAM 256K words x 16 bits (4Mbits)
Communication area	Dedicated communication LSI	MFP1N (PC96002M-C)
Display area	LED	6 LEDs: Green (RUN, L RUN, SD, RD) Red (ERR., L ERR.)
Setting selection area	Hardware switch*1	Station number setting switch, transmission speed, mode setting switch, select switch
Current consumption		0.32A
Circuit board dimensions		70.0×80.0mm
Weight		0.03kg

*1 Settings can also be configured by software.

Intelligent Device Stations

Purchase reference manual | Purchase specified parts | Conformance test

■Interface Board and User Application Circuit Block Diagram

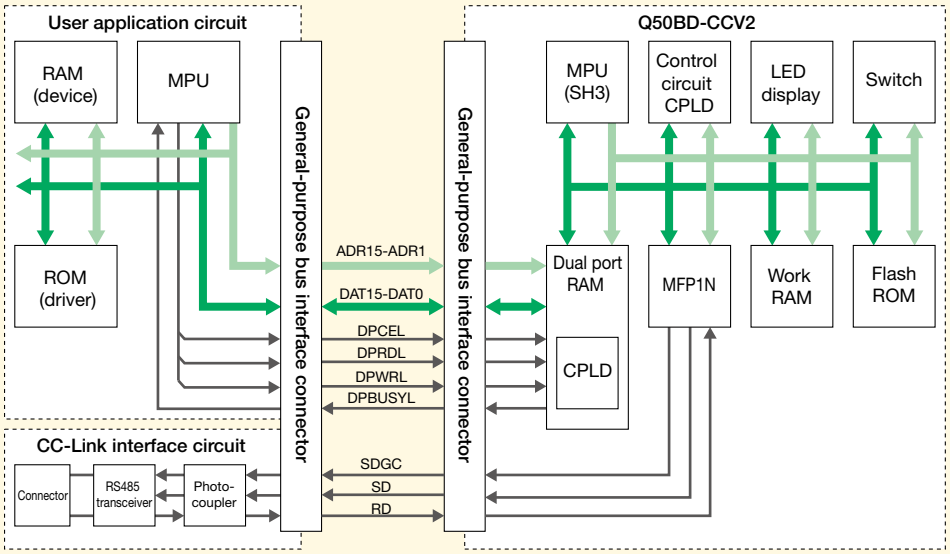

■Circuit Board Dimensions

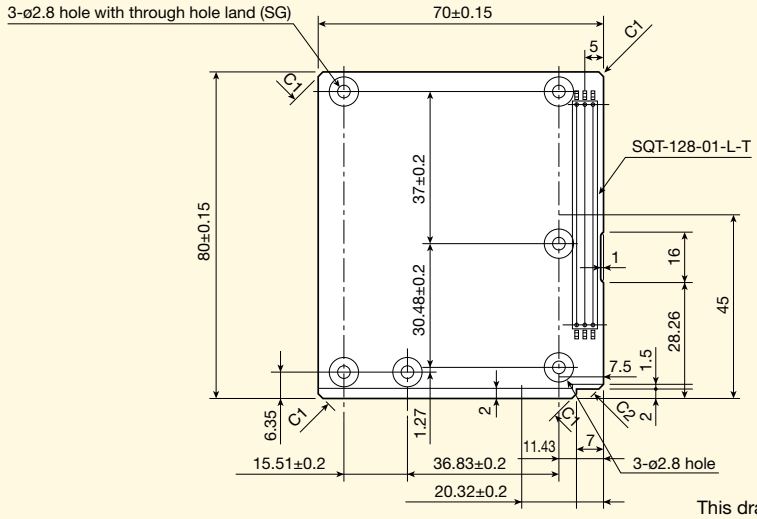

Unit : mm

SG : Signal Ground
This drawing is a C-side view of the circuit board.

■CC-Link Ver.2 Built-in Interface Board (Q50BD-CCV2)

Name	Model
CC-Link Ver.2 Built-in Interface Board	Q50BD-CCV2

■Manual

Title	Manual No.
CC-Link Ver.2 Built-in Interface Board Reference Manual	SH(NA)-080700ENG

*Provides circuit examples, timing charts, pin assignments and driver develop methods.

CC-Link

Developing Master Stations, Local Stations and

CC-Link Ver.2 Object Development

1. The CC-Link Ver.2 object development kit allows you to develop master stations, local stations, intelligent device stations, and standby master stations.
2. The object development kit is compatible with CC-Link Ver.2.
   With CC-Link Ver.2, the maximum number of cyclic data points can be extended to 8,192 bits for RX/RY and 2,048 words for RWr/RWw. CC-Link Ver.2 is also compatible with conventional specifications (Ver.1).
3. Data communication can be easily performed.
   Use of a dual port RAM enables easy data communication between the object development application circuit and user application circuit.
4. The object code installation method is selectable.
   The object development application products require the installation of an object code. An installation method can be selected from two methods: using serial communication and using a ROM writer.
5. The object development application circuit is realized using the dedicated communication LSI (MFP1N) and device kit (Q6KT-NPC2OG51).

- Upon request, hardware and software development partners are introduced.
- Lead-free/RoHS directive compliant
- Use of this product requires conclusion of the license agreement with Mitsubishi Electric.

■Object development kit



■Dedicated Communication LSI (MFP1N)

■Device kit

*Actual printing may differ from those shown in the figure.

■Object Development Kit

Name	Model	Packaging Unit
CC-Link Ver.2 Object Development Kit •CC-Link Ver.2 Object Development CD-ROM* •CC-Link Ver.2 Object Development (master station, local station, intelligent device station) Reference Manual SH(NA)-080701ENG	SW1D5C-CCV2OBJ-E	1 set

*Includes object code and circuit diagram electronic data.

■Dedicated Communication LSI (MFP1N), Device Kit

[1] Dedicated Communication LSI (MFP1N)

Name	Model	Packaging Unit
MFP1N (PC96002M-C)	A6GA-CCMFP1NN60F	60 pieces
	A6GA-CCMFP1NN300F	300 pieces

*Package: 100-pins QFP, size: 20 x 14mm, Pin spacing: 0.65mm, Power supply voltage: 5.0VDC

[2] Device Kit

Name	Model	Packaging Unit
Device Kit (Flash ROM x 1, CPLD x 2)	Q6KT-NPC2OG51	40 sets

Intelligent Device Stations

Contract | Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

■Mounting Example with Object Development

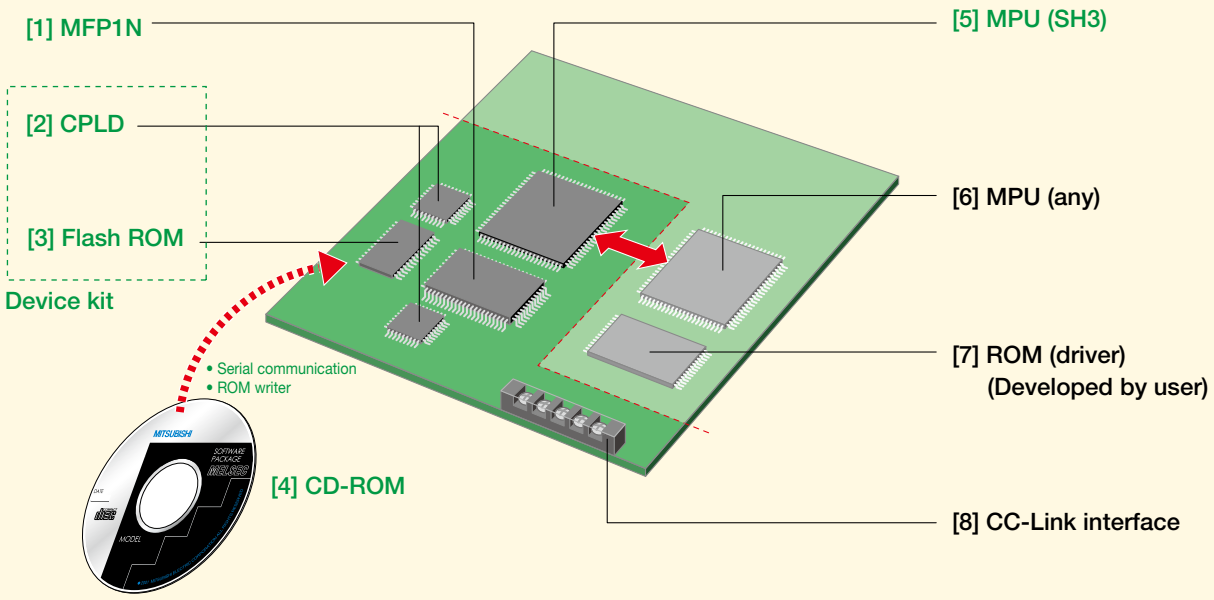

	Name	Product Name	Manufacturer
[1]	MFP1N (PC96002M-C)	A6GA-CCMFP1NN**F Master, Local, Intelligent Device Station LSI	Mitsubishi Electric Corporation
[2]	CPLD	Q6KT-NPC2OG51 (Device Kit) (Flash ROM x 1, CPLD x 2)	Mitsubishi Electric Corporation
[3]	Flash ROM		
[4]	CD-ROM	Includes object code and circuit diagram electronic data. (SW1D5C-CCV2OBJ)	Mitsubishi Electric Corporation
[5]	MPU (for object development application circuit)	SH3 (SH7708R) HD6417708RF100AV	Renesas Electronics Corporation
[6]	MPU (for user application circuit)	Any MPU can be used.	Any manufacturer
[7]	ROM (for driver)	Stores firmware for communicating with the object development application circuit.	Developed by user
[8]	CC-Link interface	Use the parts recommended by the CC-Link Partner Association.	Each manufacturer

■Object Development Application Circuit Basic Specifications

Classification	Item	Description
Control area	MPU	SH3 (SH7708R) HD6417708RF100AV QFP 144pin
Memory	ROM	Flash ROM 512K words × 16 bits (8Mbits)
	SRAM	Dual port RAM 32K words x 16 bits (512K bits) Work RAM 256K words x 16 bits (4M bits)
Communication area	Dedicated communication LSI	MFP1N (PC96002M-C)
Display area	LED	RUN, L RUN, SD, RD, BOOT, BOOT OK, ERR., L ERR., BOOT ERR *1
Setting selection area	Hardware switch*2	Station number setting switch, transmission speed, mode switch, select switch

*1 The LED layout, colors, and shapes are not specified.
*2 Settings can also be configured by software.

CC-Link Developing Remote Device Stations

Dedicated Communication LSI MFP3N

1. The dedicated communication LSI MFP3N allows you to develop CC-Link remote device stations.
2. The memory access to the send/receive buffer of MFP3N from the user application allows you to develop devices that handle bit and word data without concern about protocol.
3. The MFP3N can apply to CC-Link Ver.1 and CC-Link Ver.2. (For applying to Ver.2, the software must be modified.)

- Upon request, hardware and software development partners are introduced.
- Lead-free/RoHS directive compliant

■Dedicated Communication LSI (MFP3N)

■Manual



*Actual printing may differ from those shown in the figure.

■Data Size

The remote Input/Output (RX/RY: bit data) and remote register (RWw/RWr: word data) can handle the amount of data shown in the table below, based on the number of occupied stations.

Type		Version	Expanded Cyclic Setting	Number of occupied stations			
				1 station occupied	2 station occupied	3 station occupied	4 station occupied
Remote input: RX*		Ver.1	–	32 bits	64 bits	96 bits	128 bits
		Ver.2	Double	32 bits	96 bits	160 bits	224 bits
			Quadruple	64 bits	192 bits	320 bits	448 bits
			Octuple	128 bits	384 bits	640 bits	896 bits
Remote output: RY*		Ver.1	–	32 bits	64 bits	96 bits	128 bits
		Ver.2	Double	32 bits	96 bits	160 bits	224 bits
			Quadruple	64 bits	192 bits	320 bits	448 bits
			Octuple	128 bits	384 bits	640 bits	896 bits
Remote register	M→R:RWw	Ver.1	–	4 words	8 words	12 words	16 words
		Ver.2	Double	8 words	16 words	24 words	32 words
			Quadruple	16 words	32 words	48 words	64 words
			Octuple	32 words	64 words	96 words	128 words
	R→M:RWr	Ver.1	–	4 words	8 words	12 words	16 words
		Ver.2	Double	8 words	16 words	24 words	32 words
			Quadruple	16 words	32 words	48 words	64 words
			Octuple	32 words	64 words	96 words	128 words

*The last 16 points are reserved by the system.

Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

■General Block Diagram

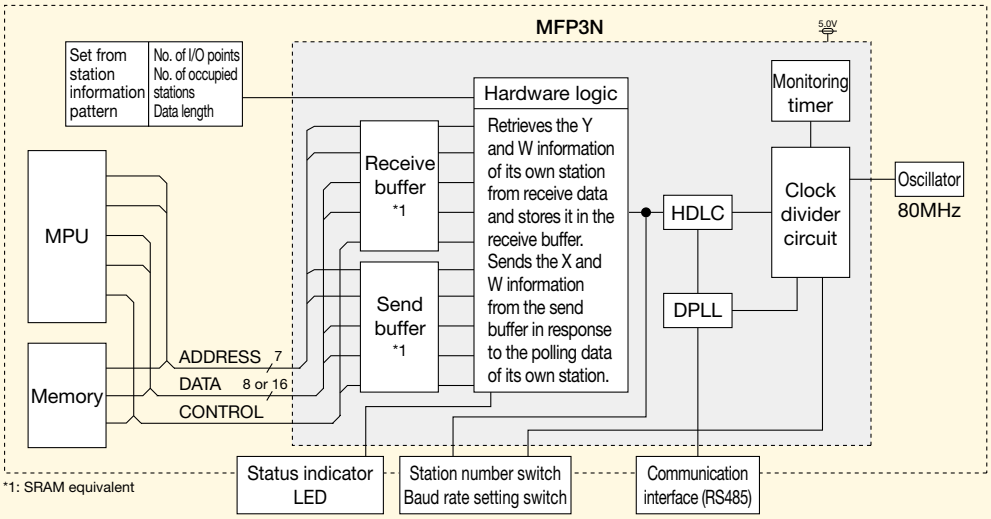

■External Dimensions

Package: 100 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

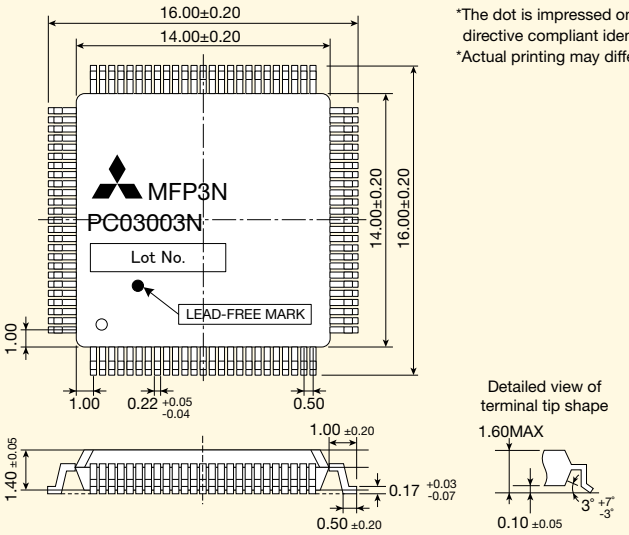

*The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
*Actual printing may differ from those shown in the figure.

Unit : mm

■ Dedicated Communication LSI (MFP3N)

Name	Model	Packaging Unit
MFP3N (PC03003N)	A6GA-CCMFP3NN60F	60 pieces
	A6GA-CCMFP3NN300F	300 pieces

■ Manual

Title	Manual No.
CC-Link Remote Device Station Communication LSI MFP3N (CC-Link Ver.2 Compatible) Reference Manual	SH(NA)-080624ENG

*Provides circuit examples, MFP3N electrical characteristics, pin assignments, a detailed memory map, and sample flow.

CC-Link

Developing Remote I/O Stations

Dedicated Communication LSI MFP2N / MFP2AN

1. The dedicated communication LSI MFP2N and MFP2AN allow you to develop CC-Link remote I/O stations.
2. The difference between MFP2N and MFP2AN lies in the package size (number of pins) and I/O point quantity. Other than the package size (number of pins) and I/O point quantity, the LSIs are identical. The master treats both LSIs as remote I/O stations without differentiation. Having both MFP2N and MFP2AN remote I/O stations in the same system is no problem.
3. With MFP2N and MFP2AN, CC-Link protocol is fully realized using the dedicated communication LSI, enabling product development with hardware only. (Devices such as an MPU or software are not required.)

•Upon request, hardware development partners are introduced.
•Lead-free/RoHS directive compliant

■Dedicated Communication LSI (MFP2N)

■Dedicated Communication LSI (MFP2AN)

■Manual (MFP2N)



■Manual (MFP2AN)



*Actual printing may differ from those shown in the figure.

■Number of MFP2N I/O Points

The remote I/O station has only one station occupied.The number of I/O points can be selected from the following combinations.

	I/O type		Remarks
	Remote Input	Remote Output	
(1)	8 points	–	Any setting other than the 8 types is not possible.
(2)	–	8 points	
(3)	16 points	–	
(4)	–	16 points	
(5)	8 points	8 points	
(6)	32 points	–	
(7)	–	32 points	
(8)	16 points	16 points	

■Number of MFP2AN I/O Points

The remote I/O station has only one station occupied. The number of I/O points can be selected from the following combinations.

	I/O type		Remarks
	Remote Input	Remote Output	
(1)	16 points	–	Any setting other than the 3 types is not possible.
(2)	–	16 points	
(3)	8 points	8 points	

Purchase reference manual | Purchase dedicated LSI | Purchase specified parts | Conformance test

■General Block Diagram (MFP2N)

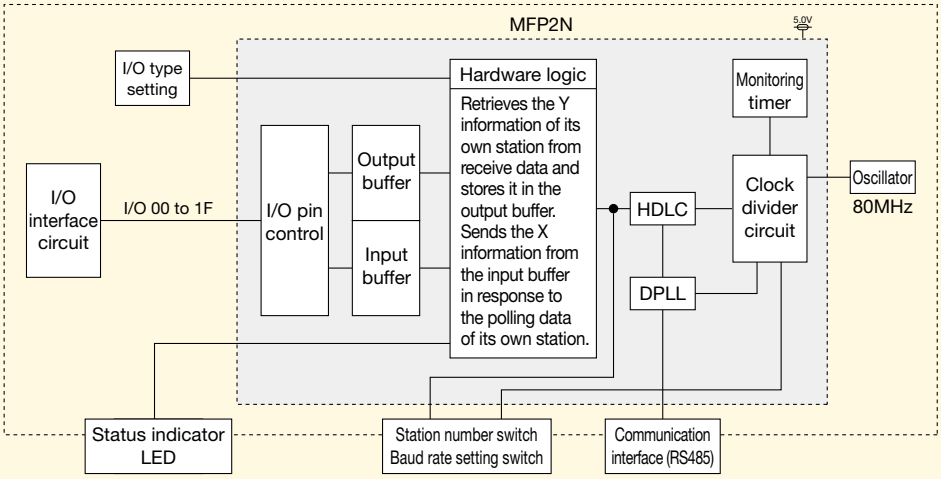

■External Dimensions

*The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
*Actual printing may differ from those shown in the figure.

MFP2N

Package: 100 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

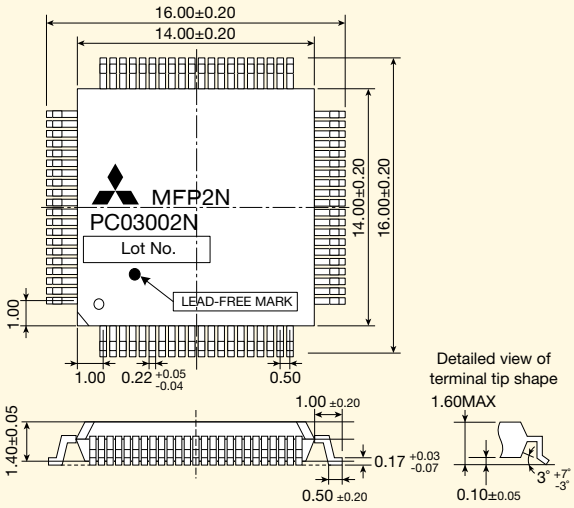

MFP2AN

Package: 80 pins QFP, Shape: 12 x 12 mm, 0.5 mm between pins

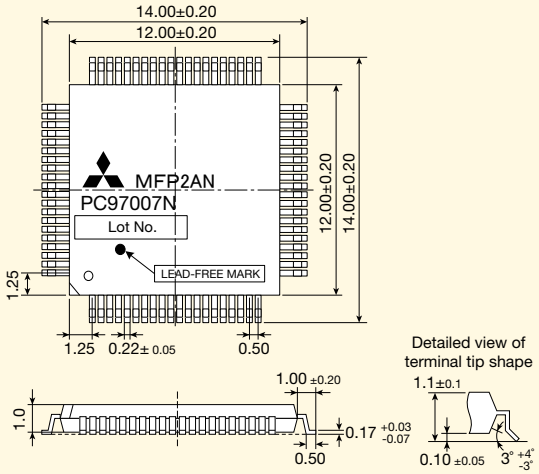

Unit : mm

■Dedicated Communication LSI (MFP2N / MFP2AN)

Name	Model	Packaging Unit
MFP2N (PC03002N)	A6GA-CCMFP2NN60F	60 pieces
	A6GA-CCMFP2NN300F	300 pieces
MFP2AN (PC97007N)	A6GA-CCMFP2ANN60F	60 pieces
	A6GA-CCMFP2ANN300F	300 pieces

■Manual (MFP2N / MFP2AN)

Title	Manual No.
CC-Link Remote I/O Station Communication LSI MFP2N Reference Manual	SH(NA)-080622ENG
CC-Link Remote I/O Station Communication LSI MFP2AN Reference Manual	SH(NA)-080623ENG

*Provides circuit examples, electrical characteristics, and pin assignments.

CC-Link Developing Remote I/O Stations

CC-Link Embedded I/O Adapter

■CC-Link Embedded I/O Adapter

■Manual



■Mounting Example



1. This adapter is a modular remote I/O used as a device-embedded adapter.
2. Using a pin header as the external interface for adapter power supply, transmission, I/O signals and others, the adapter can be installed directly to a user board.
   AJ65MBTL1N-16DT, AJ65MBTL1N-16D, AJ65MBTL1N-16T: 44-pin, 2-row, 2mm-pitch pin header
   AJ65MBTL1N-32D, AJ65MBTL1N-32T: 62-pin, 2-row, 2mm-pitch pin header
3. The adapter power supply uses a transformer insulation method and the external I/O uses a photocoupler insulation method.
4. The transistor output section has the overload, overvoltage, and overheat protection functions.
5. This adapter includes the dedicated LSI, specified parts, station number switches, and LED indicators.
6. The CC-Link embedded I/O adapters can be cascaded. Two CC-Link embedded I/O adapters can be installed side by side within the same board.
   A distance of 5mm or more is required between the CC-Link embedded I/O adapters.
   The station number and baud rate settings must be set for each adapter.
   The I/O allocation for the CC-Link embedded I/O adapter is 32 points per station. Although the latter 16 points are open for 16-point I/O adapters, they cannot be used even if I/O adapters are cascaded.

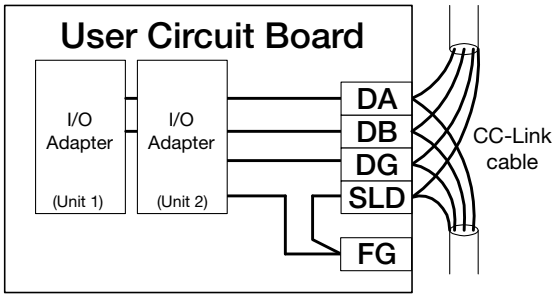

The adapters can be cascaded on the user circuit board as illustrated above. (Cascade connection limit: 2 units, max.)

Purchase reference manual

Conformance test

■External Dimensions

AJ65MBTL1N-16DT, AJ65MBTL1N-16D, AJ65MBTL1N-16T

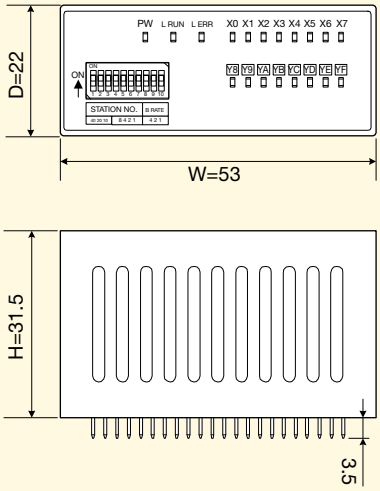

53 (W) x 31.5 (H) x 22 (D) (Unit: mm)

AJ65MBTL1N-32D, AJ65MBTL1N-32T

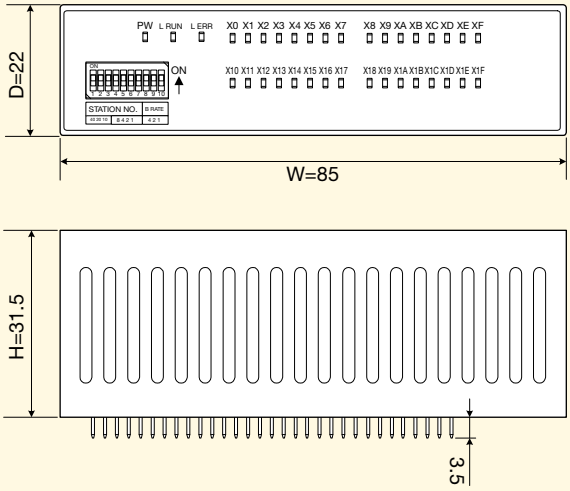

85 (W) x 31.5 (H) x 22 (D) (Unit: mm)

■CC-Link Embedded I/O Adapter

Name	Model	Specifications	Packaging Unit
CC-Link Embedded I/O Adapter	AJ65MBTL1N-16DT	24V DC input, plus common (sink type): 8 bits (points); Transistor 0.1A sink output: 8 bits (points)	1piece
	AJ65MBTL1N-16D	24V DC input, plus common (sink type): 16 bits (points)	
	AJ65MBTL1N-16T	Transistor 0.1A sink output: 16 bits (points)	
	AJ65MBTL1N-32D	24V DC input, plus common (sink type): 32 bits (points)	
	AJ65MBTL1N-32T	Transistor 0.1A sink output: 32 bits (points)	

■Manual

Title	Manual No.
CC-Link Embedded I/O Adapter User's Manual	SH(NA)-080324E

Developing Drivers for the Various Operating Systems of CC-Link Ver.2 PC Interface Board

Purchase reference manual

Q80BD-J61BT11N Driver Development

■Manual



■Conceptual Diagram

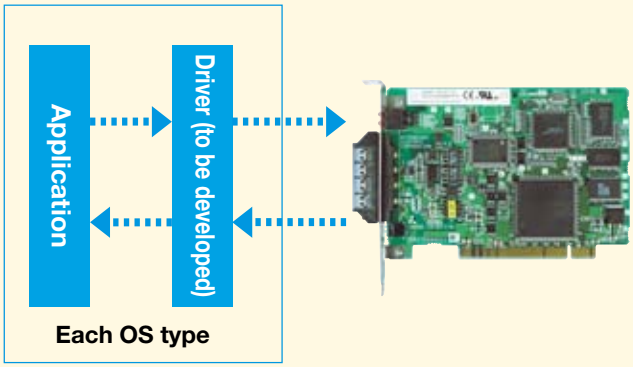

1. Developing a driver for the various operating systems enables use of the CC-Link Ver.2 compatible PC interface board as a master station or local station.

2. The CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual helps you develop a PC interface board Q80BD-J61BT11N driver compatible with the various operating systems.

3. The reference manual describes the hardware information (PCI configuration area, 2-port memory area and I/O port area.
memory maps) and software information (driver initialization procedure and parameter setup procedure) required for driver development.

4. This reference manual includes sample programs (C language), making it possible to reduce development costs and shorten development man-hours.

•Upon request, software development partners are introduced.

■Manual

Title	Manual No.
CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual	SH(NA)-080702ENG

CC-Link Ver.2 PC Interface Board

Q80BD-J61BT11N

1. The interface board allows you to incorporate personal computers into the CC-Link Ver.2 system.
   The interface board allows you to use a personal computer as a master station, standby master station or local station within a CC-Link Ver.2 system when mounted.
2. The interface board enables simple parameter setup.
   Using the CC-Link Ver.2 utility enables simple setup of the parameters required for CC-Link system operation.
3. The interface board displays test information and monitor information related to the CC-Link system.
   The interface board enables simple display of CC-Link system related test and monitor status information on the personal computer.
4. The interface board offers RCPU and QCPU multiple CPU system compatibility.
   The interface board enables communication with each CPU of a multiple CPU system via specification of logical station numbers using the CC-Link Ver.2 utility.

■Q80BD-J61BT11N

■Q81BD-J61BT11

■Specifications

Item	Q80BD-J61BT11N	Q81BD-J61BT11
Station type	Master station, standby master station or local station	
Number of occupied stations (for local station)	1 to 4 stations (changed using the parameter settings of Utilities)	
Number of boards that can be installed	Up to 4	
Installation slot	PCI slot (half size)	PCI Express® x1, x2, x4, x8, x16 slot (half size)
PCI bus / PCI Express® bus specifications	PCI Standard Rev. 2.2 (5 VDC, 32-bit bus, Basic clock: 33 MHz)	PCI Express® Standard Rev. 1.0a (3.3 VDC±9%, link width: 1 lane, Basic clock :100MHz)
Number of occupied slots	1 slot	
Internal consumption current	0.56 A (5 VDC)	1.06 A (3.3 VDC)
Weight	0.11kg	
Included software	Windows® software package (1 CD-ROM)*	

* For information on compatible versions of Windows®, visit the Mitsubishi Electric Factory Automation Website.

Products that do not include a Windows® software package (CD-ROM) are also available.
For details, contact your local dealer network.

CC-Link/LT Developing Master Stations

Dedicated Communication LSI CLC13

The master station is comprised of a master station communication LSI (CLC13) and peripheral communication circuit. A “General Block Diagram” of the master station is shown below.

1. CC-Link/LT Communication Interface

[1] Master Station Function

CLC13 has a CC-Link/LT master station function, enabling data link with CC-Link/LT remote stations.

[2] Monitor Function

The monitor function allows you to monitor transmission frames (master station send frames and remote station transmission frames).

(The function lets you monitor transmission frame remote I/O data and remote station status information.)

2. Microcomputer Interface

CLC13 includes an interface that enables general-purpose microcomputer connection, allowing you to read and write remote I/O and other data using a general-purpose microcomputer. (CLC13 can be accessed as regular memory from the general-purpose microcomputer.)

- Upon request, hardware and software development partners are introduced.
- Lead-free/RoHS directive compliant

■Dedicated Communication LSI (CLC13)

■Manual



*Actual printing may differ from those shown in the figure.

■General Block Diagram

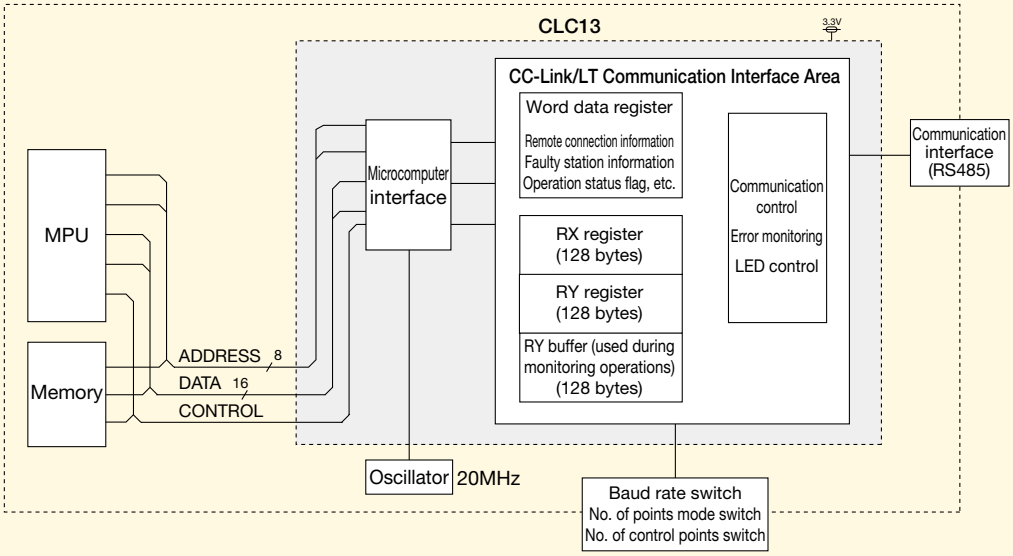

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

External Dimensions

*Actual printing may differ from those shown in the figure.

Package: 100 pins QFP, Shape: 16 x 16 mm, 0.5 mm between pins

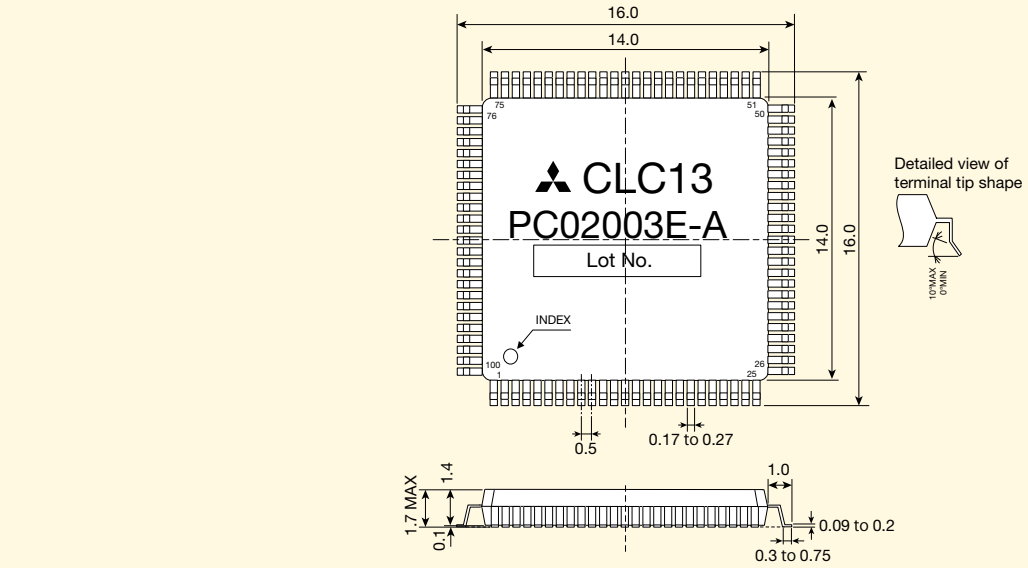

Unit : mm

Dedicated Communication LSI (CLC13)

Name	Model	Packaging Unit
CLC13 (PC02003E-A)	CL2GA13-60	60 pieces

Manual

Title	Manual No.
CC-Link/LT Master Station Communication LSI CLC13 Reference Manual	SH(NA)-080703ENG

*Provides circuit examples, CLC13 electrical characteristics and pin assignments.

CC-Link/LT

Developing Remote Device Stations

Dedicated Communication LSI CLC31

The remote device station is comprised of a remote device station communication LSI (CLC31) and peripheral communication circuit. A “General Block Diagram” of the remote device station is shown below.

1. The remote device station with CLC31 has the MPU and memory device, and is controlled by user-developed software.
2. CLC31 has the CC-Link/LT protocol built-in, allowing developers to develop software without concern about protocol.
3. The data amount of 4 words can be handled with a single chip. (One word is allocated for each station, and up to 4 stations can be occupied.) By setting the number of occupied stations, the developer can specify the optimum data amount for the device to be developed. This enables reduction of the number of occupied stations of the device.
4. CLC31 has a built-in function that assures 1-word (16-bit) data communication (i.e., prevents data separation). For this reason, a remote device station connected to the network must be operated in 16-bit mode.

•Upon request, hardware and software development partners are introduced.
•Lead-free/RoHS directive compliant

■Dedicated Communication LSI (CLC31)

■Manual



*Actual printing may differ from those shown in the figure.

■General Block Diagram

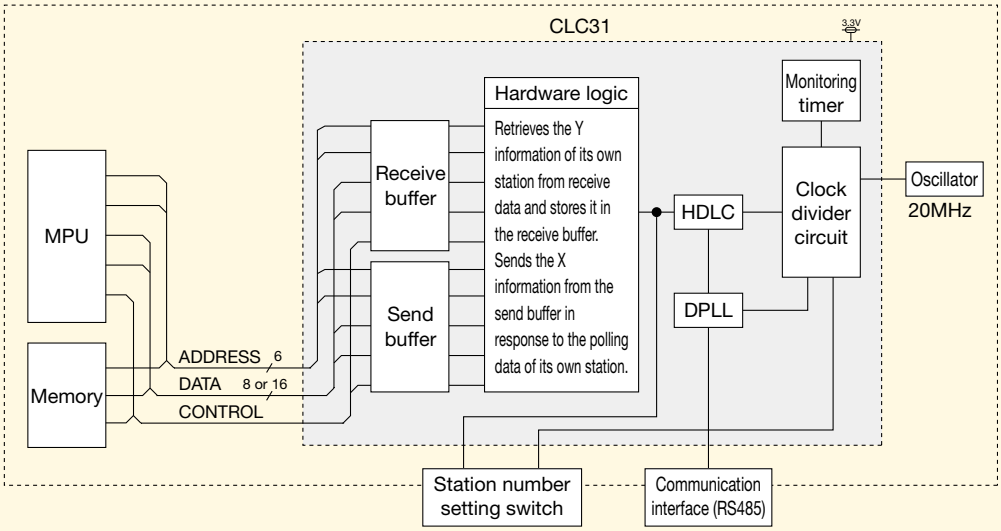

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

■External Dimensions

Package: 80 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

*The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
*Actual printing may differ from those shown in the figure.

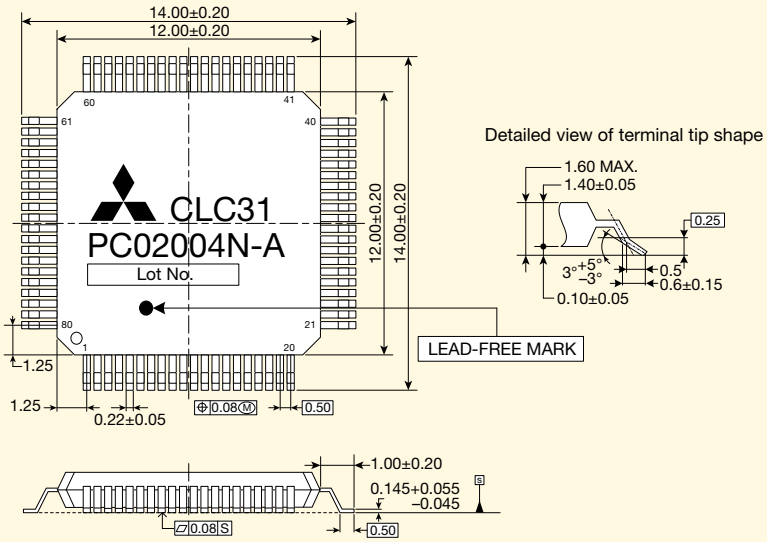

Unit: mm

■Dedicated Communication LSI (CLC31)

Name	Model	Packaging Unit
CLC31 (PC02004N-A)	CL2GA31-60	60 pieces

■Manual

Title	Manual No.
CC-Link/LT Remote Device Station Communication LSI CLC31 Reference Manual	SH(NA)-080704ENG

*Provides circuit examples, CLC31 electrical characteristics and pin assignments, etc.

CC-Link/LT Developing Remote I/O stations

Dedicated Communication LSI CLC21

The remote I/O station is comprised of a remote I/O station communication LSI (CLC21) and peripheral communication circuit. A “General Block Diagram” of the remote I/O station is shown below.
CC-Link/LT protocol is fully realized with CLC21, allowing development with hardware only. (MPU, software and other devices are not required.)

- Upon request, hardware development partners are introduced.
- Lead-free/RoHS directive compliant

■Dedicated Communication LSI (CLC21)

■Manual



*Actual printing may differ from those shown in the figure.

■Number of CLC21 I/O Points

The number of I/O points can be selected from the following combinations.

	I/O Type		Remarks
	Remote Input	Remote Output	
(1)	1 point	–	Any setting other than the 20 types is not possible.
(2)	–	1 point	
(3)	2 point	–	
(4)	1 point	1 point	
(5)	–	2 point	
(6)	4 point	–	
(7)	2 point	2 point	
(8)	–	4 point	
(9)	8 point	–	
(10)	4 point	4 point	
(11)	–	8 point	
(12)	12 point	–	
(13)	8 point	4 point	
(14)	4 point	8 point	
(15)	–	12 point	
(16)	16 point	–	
(17)	12 point	4 point	
(18)	8 point	8 point	
(19)	4 point	12 point	
(20)	–	16 point	

Purchase reference manual | Purchase dedicated LSI | Purchase recommended Parts | Conformance test

■General Block Diagram

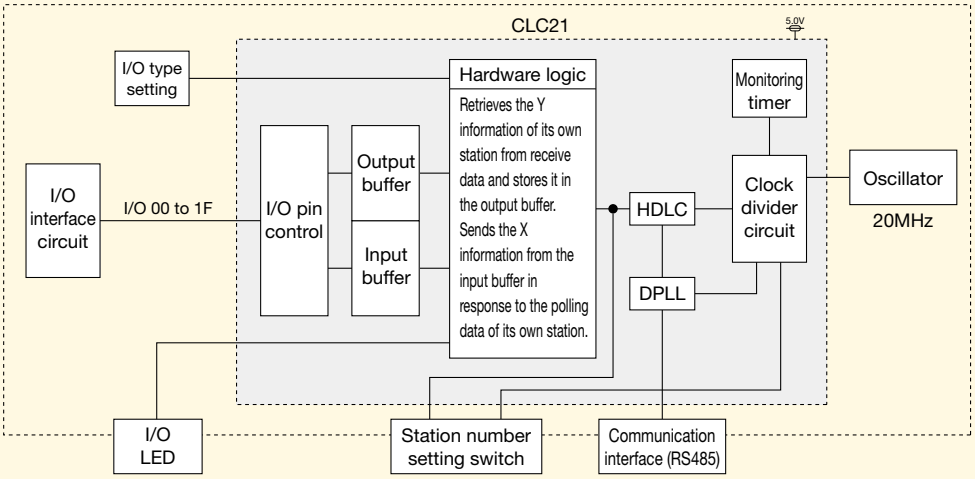

■External Dimensions

Package: 80 pins QFP, Shape: 14 x 14 mm, 0.5 mm between pins

*The dot is impressed on the package as a lead-free/RoHS directive compliant identification mark.
*Actual printing may differ from those shown in the figure.

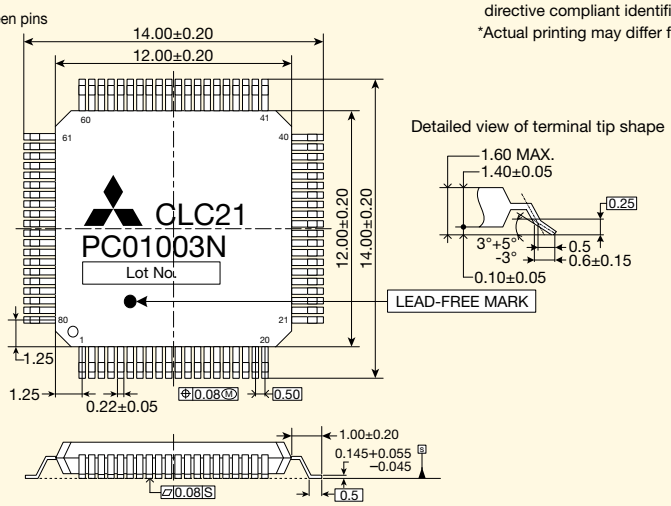

Unit: mm

■Dedicated Communication LSI (CLC21)

Name	Model	Packaging Unit
CLC21 (PC01003N)	CL2GA21-60	60 pieces
	CL2GA21-300	300 pieces

■Manual

Title	Manual No.
CC-Link/LT Remote I/O Station Communication LSI CLC21 Reference Manual	SH(NA)-080707ENG

*Provides circuit examples, CLC21 electrical characteristics and pin assignments, etc.

CC-Link IE Field

Recommended Parts/Specified Parts

CC-Link IE Field Network

■Recommended Parts and Specified Parts

There are no parts recommended or specified by the CC-Link Partner Association or Mitsubishi Electric.

■Parts Requiring Caution at the Time of Selection

For the parts in the table below, use parts that satisfy the selection conditions specified by the CC-Link Partner Association and Mitsubishi Electric.

Item	Selection Conditions	Condition Specified By	Reference Model*1	Reference Manufacturer*1
RJ-45 connector	"ANSI/TIA/EIA-568-B" 8-pin connector with shield IEEE802.3 1000BASE-T compatible	CC-Link Partner Association	1827585-1*2	Tyco Electronics Japan G.K.
			2201061-1*3	
Pulse transformer	IEEE802.3 1000BASE-T compatible		MGF101	Sinka Japan Co., Ltd.
PHY*4	IEEE802.3 1000BASE-T compatible Full duplex compatible Auto-negotiation function compatible GMII interface compatible Auto MDI/MDIX negotiation compatible MDC clock 7.812 MHz compatible	CC-Link Partner Association / Mitsubishi Electric Corporation	88E1111-B2-BAB1C000	Marvell Semiconductor, Inc.
MPU*4	Data width: 32 bits or more (CP220-based development: 16 bits or more) Address width: 17 bits or more Endian: Little endian	Mitsubishi Electric Corporation	V850E/ME2	Renesas Electronic Corporation
25 MHz crystal oscillator*5	Frequency deviation: Within ±50 ppm RMS jitters (1-sigma): 5 ps rms or less		KC2520B25.0000C1GESJ	Kyocera Crystal Device Corporation
125 MHz crystal oscillator*4	Frequency deviation: Within ±50 ppm		DSO321SV 125.000MHz*2	Daishinku Corporation*2
2.097152 MHz crystal oscillator			DSO321SR 2.097152MHz*2	
			KC2520B2.09715C1GESJ*3	Kyocera Crystal Device Corporation*3

*1 Reference models and manufacturers of parts described in the manual (circuit diagram examples).
*2 Reference models and manufacturers of parts described in the manual (circuit diagram examples) for source code development or of the CP220.
*3 Reference models and manufacturers of parts described in the manual (circuit diagram examples) of the CP520.
*4 Parts used in the source code development and CP220-based development.
*5 Parts used in the CP520-based development.

CC-Link Recommended Parts/Specified Parts

CC-Link

■CC-Link Partner Association Recommended Parts

The following shows the parts recommended by the CC-Link Partner Association for use in the CC-Link interface circuits.

Item	Model	Manufacturer
Filter	MCT7050-A401	Sinka Japan Co., Ltd.
RS485 transceiver	SN75ALS181NS	Texas Instruments, Ltd.
Zener diode	RD6.2Z	Renesas Electronics Corporation
	PESD5V0U1UA	NXP Semiconductors N.V.
Photocoupler	HCPL-7720-500E *1	Avago Technologies, Ltd.
	HCPL-0720-500E *2	
Photocoupler	HCPL-2611-500E *1	
	HCPL-M611-500E *2	
	PS9117A	Renesas Electronics Corporation

*1 Specify Option 060 when VIORM = 630VPEAK electrical isolation is required.
*2 Specify Option 060 when VIORM = 560VPEAK electrical isolation is required.
Note: For the model information of CC-Link Partner Association recommended parts, contact the CC-Link Partner Association.

■Mitsubishi Electric Corporation Specified Parts

The following shows the specified parts to be used when developing a product based on a development method provided by Mitsubishi Electric.

Item	Model	Manufacturer
MPU	SH3 (SH7708R) HD6417708RF100AV *	Renesas Electronics Corporation
Device kit	Q6KT-NPC2OG51* (Flash ROM x 1, CPLD x 2) x 40	Mitsubishi Electric Corporation
Crystal oscillator	DSO751SBM 80MHz	Daishinku Corporation
	DSO751SB 80MHz	
	KC7050B80.0000C5ZBQZ (FXO-37FNB 80MHz)	Kyocera Crystal Device Corporation

* Used with CC-Link Ver.2 object development only.

■Combinations of Development Methods, CC-Link Partner Association Recommended Parts, and Mitsubishi Electric Corporation Specified Parts.

Item	Model	Built-In Interface Board (Q50BD-CCV2)	Object Development	MFP3N	MFP2N, MFP2AN	Embedded I/O Adapter (AJ65MBTL1N-***)
Filter	MCT7050-A401	○	○	○	○	—
RS485 transceiver	SN75ALS181NS	○	○	○	○	—
Zener diode	RD6.2Z	○	○	○	○	—
	PESD5V0U1UA					
Photocoupler	HCPL-7720-500E	○	○	△	△	—
	HCPL-0720-500E					
Photocoupler	HCPL-2611-500E	○	○	△	△	—
	HCPL-M611-500E					
	PS9117A					
MPU	SH3 (SH7708R)	—	○	—	—	—
Device kit	Q6KT-NPC2OG51	—	○	—	—	—
Crystal oscillator	DSO751SBM 80MHz	—	○	○	○	—
	DSO751SB 80MHz					
	KC7050B 80.0000C5ZBQZ					

○: Required △: Optional —: Already provided in product or not required
* EMC Directive compatibility needs to be verified by the customer.

CC-Link/LT Recommended Parts/Specified Parts

CC-Link/LT

■CC-Link Partner Association Recommended Parts

The following shows the parts recommended by the CC-Link Partner Association for use in the CC-Link/LT interface circuits.

Item	Model	Manufacturer
Filter (for master station)	M-521CT	NEC TOKIN Corporation
Filter (for slave station)	DLW31SN102SQ2	Murata Manufacturing Co., Ltd.
RS485 transceiver	MAX1487CSA+	Maxim Integrated Products, Inc.
Zener diode*	PESD5V0U1UA	NXP Semiconductors N.V.
	UDZU5.6B	ROHM Co., Ltd.
Photocoupler	PS9117A	Renesas Electronics Corporation

*For the Zener diode, use PESD5V0U1UA and UDZU5.6B in combination.

■Mitsubishi Electric Corporation Recommended Parts

Item	Model	Manufacturer
Crystal oscillator (for master station)	DSO751SBM 20MHz	Daishinku Corporation
	DSO751SB 20MHz	
Crystal resonator (for slave station)	SMD-49 20MHz	
Single bus buffer gate with 3-state output (CMOS)	SN74AHCT1G125	Texas Instruments, Ltd.

■Combinations of Development Methods, CC-Link Partner Association Recommended Parts, and Mitsubishi Electric Corporation Recommended Parts.

Item	Model	CLC13	CLC31	CLC21
Filter	M-521CT	○	–	–
	DLW31SN102SQ2	–	○	○
RS485 transceiver	MAX1487CSA+	○	○	○
Zener diode	PESD5V0U1UA	○	○	○
	UDZU5.6B			
Photocoupler	PS9117A	○	○	○
Crystal oscillator	DSO751SBM 20MHz	○	–	–
	DSO751SB 20MHz			
Crystal resonator	SMD-49 20MH	–	○	○
Single bus buffer gate with 3-state output (CMOS)	SN74AHCT1G125	–	○	–

■Connector (Circuit Board Side)

Item	Model	Manufacturer
Right angle	38204-52S3-MOM SC	3M Japan Limited
Straight type	38204-62S3-MOM SC	

Memo

CC-Link IE Control Technical Information

CC-Link IE Control Network Specifications

Performance specifications

Item			Specifications	
Control specifications	Maximum number of link points per network	LB	32 K bits (32768 points, 4 Kbytes) (Basic model QCPU, safety CPU: 16 K words (16384 points, 2 Kbytes)	
		LW	128 K words (131072 points, 256 Kbytes) (Basic model QCPU, safety CPU: 16 K words (16384 points, 32 Kbytes)	
		LX	8 K bits (8192 points, 1 Kbyte)	
		LY	8 K bits (8192 points, 1 Kbyte)	
	Maximum number of link points per station		Normal mode	Extended mode*1
		LB	16 K bits (16384 points, 2 Kbytes)	32 K bits (32768 points, 4 Kbytes)
		LW	16 K words(16384 points, 32 Kbytes)	128 K words (131072 points, 256 Kbytes)
		LX	8 K bits (8192 points, 1 Kbyte)	8 K bits (8192 points, 1 Kbyte)
		LY	8 K bits (8192 points, 1 Kbyte)	8 K bits (8192 points, 1 Kbyte)
Communication speed			1Gbps	
Number of connected stations per network			Maximum of 120 stations (control stations: 1, normal stations: 119)	
Connection cable			Optical fiber cable (multi-mode fiber)	
Overall cable distance			66000 m (with 120 stations connected)	
Distance between stations (maximum)			550 m [core/clad = 50/125 (μm)]	
Maximum number of networks			239	
Maximum number of groups			32	
Topology			Ring	

*1 When extended mode is used, a CC-Link IE Control Network module with "12052" or thereafter as the first five digits of its serial number [QJ71GP21(S)-SX], a universal model QCPU with "12052" or thereafter as the first five digits of its serial number, and GX Works 2, Version 1.34L or later, are required. Additionally, all stations must support extended mode.

Cable specifications

Item		Specifications
Optical fiber specifications		1000BASE-SX (MMF) compatible optical fiber cable
	Standard	IEC 60793-2-10 Type A1a.1 (50/125 μm multimode)
	Transmission loss (max)	3.5 (dB/km) or less (λ =850nm)
	Transmission band (min)	500 (MHz/km) or more (λ =850nm)
Connector specifications		Duplex LC connector
	Standard	IEC61754-20: Type LC connector
	Connection loss	0.3 (dB) or less
	Polished surface	PC (Physical Contact) polishing

For details regarding the connection cable, etc., contact the CC-Link Partner Association.

Network wiring example

Ring type

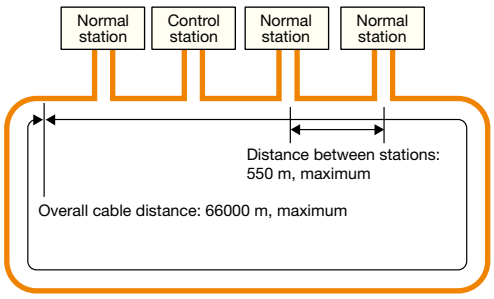

CC-Link IE Field

Technical Information

CC-Link IE Field Network Specifications

Performance specifications

Item			Specifications
Control specifications	Maximum number of link points per network	RX	16 K bits (16384 points, 2 K bytes)
		RY	16 K bits (16384 points, 2 K bytes)
		RWr	8 K words (8192 points, 16 K bytes)
		RWw	8 K words (8192 points, 16 K bytes)
	Maximum number of link points per station	RX	2 K bits (2048 points, 256 bytes)
		RY	2 K bits (2048 points, 256 bytes)
		RWr	1 K words (1024 points, 2 K bytes)
		RWw	1 K words (1024 points, 2 K bytes)
Communication speed			1Gbps
Number of connected stations per network			121 stations (master stations: 1, slave stations: 120, maximum)
Connection cable			Ethernet cable (Category 5e or higher)
Overall cable distance (maximum)		Line type	12000 m (with 1 master station and 120 slave stations connected)
		Star type	According to system configuration*1
Distance between stations (maximum)			100m
Maximum number of networks			239
Topology			Line, star, line/star mixed, ring*2

*1 Up to 20 hubs are connectable.
*2 Ring topology cannot be combined with line or star topologies.
The ring topology requires, master/local modules (QJ71GF11-T2) whose serial number (first five digits) is "12072" or later, and GX Works2, Version 1.34L or later.
The software package SW1DNC-CCIEF-E that comes with the PC interface board is not ring topology compatible. For compatibility, download SW1DNC-CCIEF-B from the Mitsubishi Electric Factory Automation Website.
The source code (SW1DNC-EFI210SRC) is not ring-topology compatible.

Cable specifications

Item		Specifications
Ethernet cable		Straight cable (with double shield, STP)
	Standard	A cable that satisfies either of the following standards: •IEEE 802.3 1000BASE-T •ANSI/TIA/EIA-568-B (Category 5e)
	Connector	Category 5e or higher, RJ-45 jack

For CC-Link IE Field Network wiring, use the wiring parts recommended by the CC-Link Partner Association.
A CC-Link IE Control Network cable cannot be used in a CC-Link IE Field Network.

Network wiring example

Line type

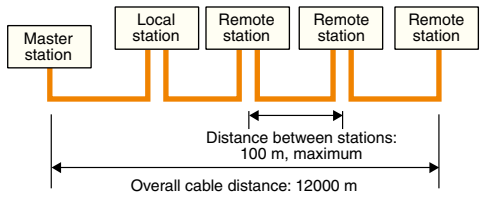

Star type

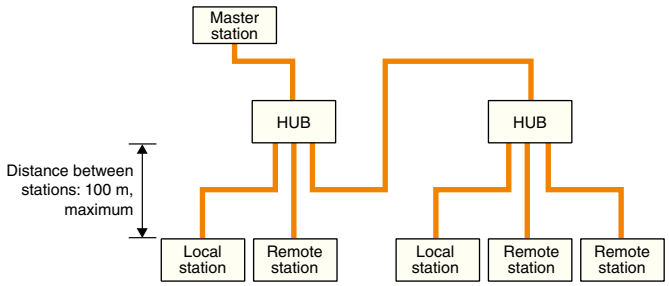

Ring type

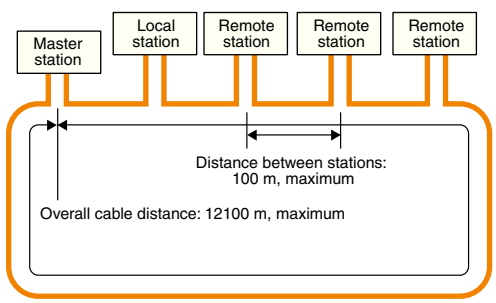

CC-Link (Ver.1.10) specifications

Item		Specifications
Control specification	Maximum number of link points per system	Remote I/O (RX,RY) : 2048 bits each Remote register (RWw) : 256 words Remote register (RWr) : 256 words
	Number of link points per station	Remote I/O (RX,RY) : 32 bits each Remote register (RWw) : 4 words Remote register (RWr) : 4 words
Communication specification	Transmission speed	10M/5M/2.5M/625k/156kbps
	Transmission method	Broadcast polling method
	Synchronization method	Frame synchronization method
	Encoding method	NRZI method
	Network topology	Bus type (conforming to EIA RS485)
	Transmission format	HDLC compliant
	Error control method	CRC ($X^{16} + X^{12} + X^5 \times 1$)
	Number of connected modules	64 modules. However, the following conditions must be satisfied. (1 x a) + (2 x b) + (3 x c) + (4 x d) =<64 a: Number of modules occupying 1 station, b: Number of modules occupying 2 stations, c: Number of modules occupying 3 stations, d: Number of modules occupying 4 stations (16 x A) + (54 x B) + (88 x C) =< 2304 A: Number of remote I/O stations ····· Max. 64 modules B: Number of remote device stations ····· Max. 42 modules*1 C: Number of local station, standby master station, and intelligent device station····· Max. 26 modules
	Remote station No.	1 to 64
	Maximum overall cable distance and cable length between stations	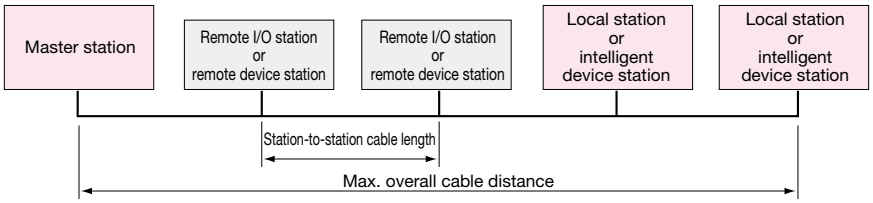 Ver.1.10-compatible CC-Link dedicated cable (with 110 Ω terminating resistors) Transmission speed / Station-to-station cable length / Max. overall cable distance 156kbps / 20cm or more / 1200m 625kbps / 20cm or more / 900m 2.5Mbps / 20cm or more / 400m 5Mbps / 20cm or more / 160m 10Mbps / 20cm or more / 100m For a system including Ver.1.00-compatible modules, the maximum overall distance and the station-to-station distance of the Ver.1.00 cable specifications apply.
	Connection cable	Ver.1.10-compatible CC-Link dedicated cable • Use the dedicated cable certified by CC-Link Partner Association. • Ver.1.10-compatible CC-Link dedicated cables manufactured by different companies can be used together. • For the specifications of the CC-Link dedicated cable or the contact information on them, refer to the partner product catalogs published by CC-Link Partner Association or visit its web site at http://www.cc-link.org
Function	Auto refresh function*2 RAS functions (standby master, automatic return, slave station separation, error detection by the link special relay and register, test/monitor)	Remote I/O network mode*2 Scan synchronization function Automatic CC-Link startup*3 Reserved station function Error invalid station setting function Support for duplex function*3

*1. Max. 64 modules for connecting the MELSEC iQ-R Series (RJ61BT11) modules using the remote device net Ver.1 mode or the remote device net Ver.2 mode.
*2. May not be supported depending on CPUs to be used together.
*3. This function is available only for the Q Series.

T-Branch Communication Specifications [Without Repeater (T-Branch) Module Use] CC-Link

System configuration

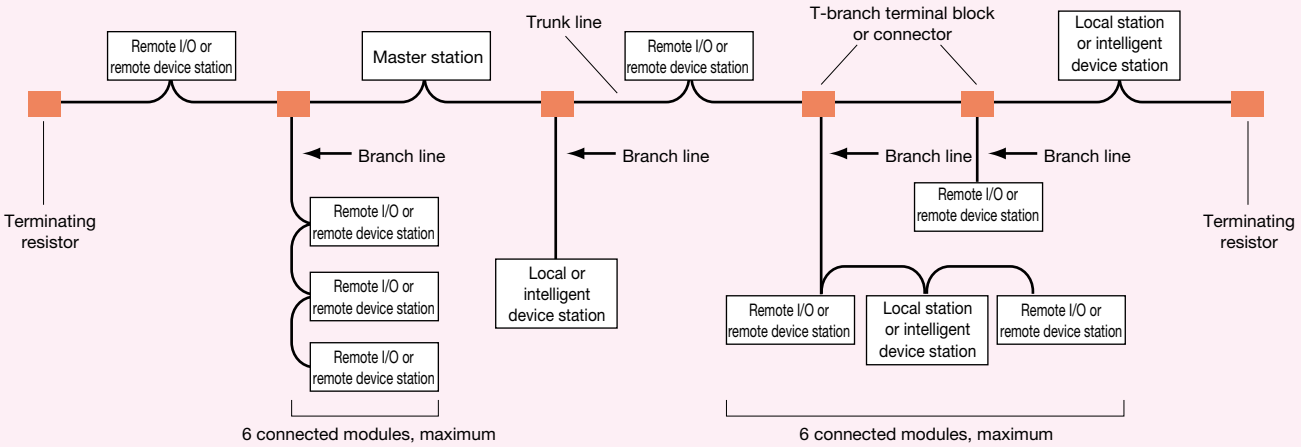

The following shows the communication specifications in the case of T-branch connection without use of a repeater (T-branch) module.
The communication specifications not listed below depends on the with CC-Link specifications.

Item	Specifications		Remarks
Transmission speed	625kbps	156kbps	10M/5M/2.5Mbps not permitted
Maximum trunk line length	100m	500m	Cable length between terminating resistors (Branch line length not included)
Maximum branch line length	8m		Total cable length per branch
Overall branch line length	50m	200m	Total length for all branch cables
Maximum number of modules connected to a branch line	6 modules per branch		Total number of connected modules depends on the CC-Link specifications.
Cable	• Ver.1.10-compatible CC-Link dedicated cable • CC-Link dedicated cable (Ver.1.00-compatible)		• Ver.1.10-compatible CC-Link dedicated cables manufactured by different companies can be used together. • CC-Link dedicated cables (Ver.1.00-compatible) manufactured by different companies cannot be used together. • CC-Link dedicated high-performance cables (Ver.1.00-compatible) cannot be used.
T-branch terminal block or connector	• Terminal block: A commercially available terminal block • Connector: FA sensor connector NECA4202 (IEC947-5-2) equivalent product is recommended. (NECA: Nippon Electric Control Equipment Industries Association)		• Do not remove the jacket of the cables on the trunk line, if possible.
Maximum trunk line length, distance between T-branches and cable length between stations	Ver.1.10-compatible CC-Link dedicated cable (a terminating resistor of 110Ω used)		

Transmission speed	Maximum trunk length	Distance between T-branches	Cable length between remote I/O stations or remote device stations*1	Cable length between a master/local station and the station one before/after the master/local station or an intelligent device station and the station before/after the intelligent device station*2
625kbps	100m	No restriction	30cm or longer	1m or longer (A), 2m or longer (B)
156kbps	500m			

(A) : This applies to a system configured with a remote I/O station and remote device station only.
(B) : This applies to a system configuration including a local station and intelligent device station.
*1,*2 Refer to the following figure.

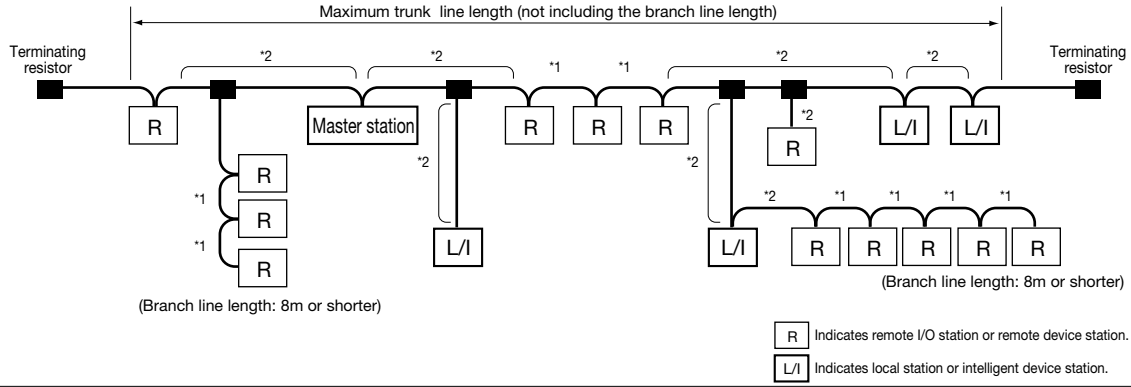

Differences between CC-Link Ver.2 and Ver.1 CC-Link

With Ver.2, the cyclic data size can be increased through extended cyclic setting.

CC-Link Ver.1 specification

Item		Specifications		
Maximum number of link points		Remote I/O (RX, RY): 2048 bits each	Remote register (RWw): 256 words	Remote register (RWr): 256 words
Number of link points per station		Remote I/O (RX, RY): 32 bits each	Remote register (RWw): 4 words	Remote register (RWr): 4 words
Number of link points for each number of occupied station	1 station occupied	Remote I/O (RX, RY): 32 bits each	Remote register (RWw): 4 words	Remote register (RWr): 4 words
	2 station occupied	Remote I/O (RX, RY): 64 bits each	Remote register (RWw): 8 words	Remote register (RWr): 8 words
	3 station occupied	Remote I/O (RX, RY): 96 bits each	Remote register (RWw): 12 words	Remote register (RWr): 12 words
	4 station occupied	Remote I/O (RX, RY): 128 bits each	Remote register (RWw): 16 words	Remote register (RWr): 16 words
Number of connected modules		1. Total number of stations (1 x a) + (2 x b) + (3 x c) + (4 x d) =< 64 a: Number of 1-station occupying modules, b: Number of 2-station occupying modules, c: Number of 3-station occupying modules, d: Number 4-station occupying modules 2. Number of connected modules (16 x A) + (54 x B) + (88 x C) =< 2304 A: Number of remote I/O stations ····· Max. 64 modules B: Number of remote device stations ····· Max. 42 modules* C: Number of local stations, standby master stations, intelligent device stations ····· Max. 26 modules		

* Max. 64 modules for connecting the MELSEC iQ-R Series (RJ61BT11) modules using the remote device net Ver.1 mode or the remote device net Ver.2 mode.

CC-Link Ver.2 specification

Item			Specifications			
Maximum number of link points			Remote I/O (RX, RY): 8192 bits each, Remote register (RWw): 2048 words, Remote register (RWr): 2048 words			
Expanded cycle setting			Single	Double	Quadruple	Octuple
Number of link points per station		Remote I/O (RX, RY)	32 bits each	32 bits each	64 bits each	128 bits each
		Remote register (RWw)	4 words	8 words	16 words	32 words
		Remote register (RWr)	4 words	8 words	16 words	32 words
Number of link points for each number of occupied station	1 station occupied	Remote I/O (RX, RY)	32 bits each	32 bits each	64 bits each	128 bits each
		Remote register (RWw)	4 words	8 words	16 words	32 words
		Remote register (RWr)	4 words	8 words	16 words	32 words
	2 station occupied	Remote I/O (RX, RY)	64 bits each	96 bits each	192 bits each	384 bits each
		Remote register (RWw)	8 words	16 words	32 words	64 words
		Remote register (RWr)	8 words	16 words	32 words	64 words
	3 station occupied	Remote I/O (RX, RY)	96 bits each	160 bits each	320 bits each	640 bits each
		Remote register (RWw)	12 words	24 words	48 words	96 words
		Remote register (RWr)	12 words	24 words	48 words	96 words
	4 station occupied	Remote I/O (RX, RY)	128 bits each	224 bits each	448 bits each	896 bits each
		Remote register (RWw)	16 words	32 words	64 words	128 words
		Remote register (RWr)	16 words	32 words	64 words	128 words
Number of connected modules			1. Total number of stations (a + a2 + a4 + a8) + (b + b2 + b4 + b8) x 2 + (c + c2 + c4 + c8) x 3 + (d + d2 + d4 + d8) x 4 =<64 2. Number of input/output points of all remote stations (a x 32 + a2 x 32 + a4 x 64 + a8 x 128) + (b x 64 + b2 x 96 + b4 x 192 + b8 x 384) + (c x 96 + c2 x 160 + c4 x 320 + c8 x 640) + (d x 128 + d2 x 224 + d4 x 448 + d8 x 896) =<8192 3. Number of all remote register words (a x 4 + a2 x 8 + a4 x 16 + a8 x 32) + (b x 8 + b2 x 16 + b4 x 32 + b8 x 64) + (c x 12 + c2 x 24 + c4 x 48 + c8 x 96) + (d x 16 + d2 x 32 + d4 x 64 + d8 x 128) =<2048 a: Number of 1-station occupying modules with single extended cyclic setting a2: Number of 1-station occupying modules with double extended cyclic setting a4: Number of 1-station occupying modules with quadruple extended cyclic setting a8: Number of 1-station occupying modules with octuple extended cyclic setting b: Number of 2-station occupying modules with single extended cyclic setting b2: Number of 2-station occupying modules with double extended cyclic setting b4: Number of 2-station occupying modules with quadruple extended cyclic setting b8: Number of 2-station occupying modules with octuple extended cyclic setting c: Number of 3-station occupying modules with single extended cyclic setting c2: Number of 3-station occupying modules with double extended cyclic setting c4: Number of 3-station occupying modules with quadruple extended cyclic setting c8: Number of 3-station occupying modules with octuple extended cyclic setting d: Number of 4-station occupying modules with single extended cyclic setting d2: Number of 4-station occupying modules with double extended cyclic setting d4: Number of 4-station occupying modules with quadruple extended cyclic setting d8: Number of 4-station occupying modules with octuple extended cyclic setting 4. Number of connected modules 16 x A+54 x B+88 x C =< 2304 A: Number of remote I/O stations ····· Max. 64 modules B: Number of remote device stations ····· Max. 42 modules* C: Number of local stations, standby master stations, intelligent device stations ····· Max. 26 modules			

* "2." and "3." are Ver.2 mode only; calculation is necessary.

* There is no change in the cable and wiring specification for CC-Link Ver.2. Use Ver.1.10-compatible CC-Link dedicated cables for the connection of Ver.2 devices.

CC-Link specifications CC-Link

■The CC-Link Ver.1.10 and Ver.1.00 specifications differ in the following two items:
- Maximum overall cable length and cable length between stations
- Cable

CC-Link Ver.1.00 Specifications (Differences from Ver.1.10)

<table>
<tr><th>Item</th><th>Specifications</th></tr>
<tr><td>Maximum overall cable distance and cable length between stations</td><td>
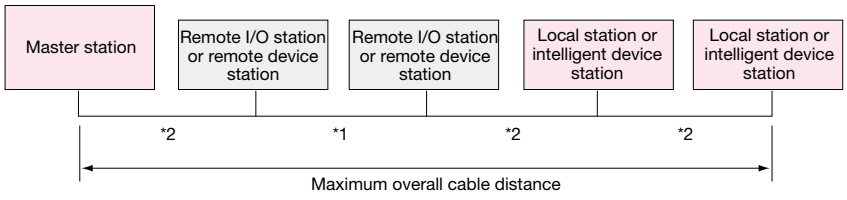

*1. Cable length between remote I/O stations or remote device stations
*2. Cable length between a master, local, or intelligent device station and the station connected before or after it

CC-Link dedicated cable (Ver.1.00-compatible) (terminating resistors of 110Ω used)
<table>
<tr><th rowspan="2">Transmission speed</th><th colspan="2">Cable length between stations</th><th rowspan="2">Maximum overall cable distance</th></tr>
<tr><th>*1</th><th>*2</th></tr>
<tr><td>156kbps</td><td rowspan="3">30cm or longer</td><td rowspan="7">1m or longer(A),
2m or longer(B)</td><td>1200m</td></tr>
<tr><td>625kbps</td><td>600m</td></tr>
<tr><td>2.5Mbps</td><td>200m</td></tr>
<tr><td rowspan="2">5Mbps</td><td>30cm to 59cm</td><td>110m</td></tr>
<tr><td>60cm or longer</td><td>150m</td></tr>
<tr><td rowspan="3">10Mbps</td><td>30cm to 59cm</td><td>50m</td></tr>
<tr><td>60cm to 99cm</td><td>80m</td></tr>
<tr><td>1m or longer</td><td>100m</td></tr>
</table>
(A) : This applies to a system configured with a remote I/O station and remote device station only.
(B) : This applies to a system configuration including a local station and intelligent device station.
The above maximum overall cable distance applies when the cable length between remote I/O stations or remote device stations is within the indicated range at one or more locations.
</td></tr>
<tr><td>Cable</td><td>CC-Link dedicated cable (Ver.1.00-compatible) or CC-Link dedicated high-performance cable (Ver.1.00-compatible)
• CC-Link dedicated cables (Ver.1.00-compatible) and CC-Link dedicated high-performance cables cannot be used together.
• Cables of different manufacturers cannot be used together.</td></tr>
</table>

CC-Link/LT specifications CC-Link/LT

<table>
<tr><th colspan="4">Item</th><th>4-point mode</th><th>8-point mode</th><th>16-point mode</th></tr>
<tr><td rowspan="11">Control specifications</td><td colspan="3">Maximum number of link points (When the same I/O address is used)</td><td>256 bits (512 bits)</td><td>512 bits (1024 bits)</td><td>1024 bits (2048 bits)</td></tr>
<tr><td colspan="3">Number of link points per station (When the same I/O address is used)</td><td>4 bits (8 bits)</td><td>8 bits (16 bits)</td><td>16 bits (32 bits)</td></tr>
<tr><td rowspan="8">Link scan time (ms)</td><td rowspan="4">When 32 stations are connected</td><td>Number of points</td><td>128 bits</td><td>256 bits</td><td>512 bits</td></tr>
<tr><td>2.5 Mbps</td><td>0.7</td><td>0.8</td><td>1.0</td></tr>
<tr><td>625 kbps</td><td>2.2</td><td>2.7</td><td>3.8</td></tr>
<tr><td>156 kbps</td><td>8.0</td><td>10.0</td><td>14.1</td></tr>
<tr><td rowspan="4">When 64 stations are connected</td><td>Number of points</td><td>256 bits</td><td>512 bits</td><td>1024 bits</td></tr>
<tr><td>2.5 Mbps</td><td>1.2</td><td>1.5</td><td>2.0</td></tr>
<tr><td>625 kbps</td><td>4.3</td><td>5.4</td><td>7.4</td></tr>
<tr><td>156kbps</td><td>15.6</td><td>20.0</td><td>27.8</td></tr>
<tr><td rowspan="12">Communication specification</td><td colspan="3">Transmission speed</td><td colspan="3">2.5M/625k/156kbps</td></tr>
<tr><td colspan="3">Communication protocol</td><td colspan="3">BITR (Broadcast polling+Interval Timed Response)</td></tr>
<tr><td colspan="3">Network topology</td><td colspan="3">T-branch</td></tr>
<tr><td colspan="3">Error control method</td><td colspan="3">CRC</td></tr>
<tr><td colspan="3">Number of connected modules</td><td colspan="3">64</td></tr>
<tr><td colspan="3">Remote station number</td><td colspan="3">1 to 64</td></tr>
<tr><td colspan="3">Maximum number of connectable stations per branch line</td><td colspan="3">8</td></tr>
<tr><td colspan="3">Distance between stations</td><td colspan="3">No restriction</td></tr>
<tr><td colspan="3">T-branch interval</td><td colspan="3">No restriction</td></tr>
<tr><td colspan="3">Master station connection position</td><td colspan="3">End of trunk line</td></tr>
<tr><td colspan="3">RAS functions</td><td colspan="3">Network diagnostics, internal loopback diagnostics, station detach function, automatic return function</td></tr>
<tr><td colspan="3">Connection cable</td><td colspan="3">Dedicated flat cable(0.75mm² x 4), VCTF cable, high flexible cable</td></tr>
</table>

Technical Information

CC-Link/LT network wiring specifications CC-Link/LT

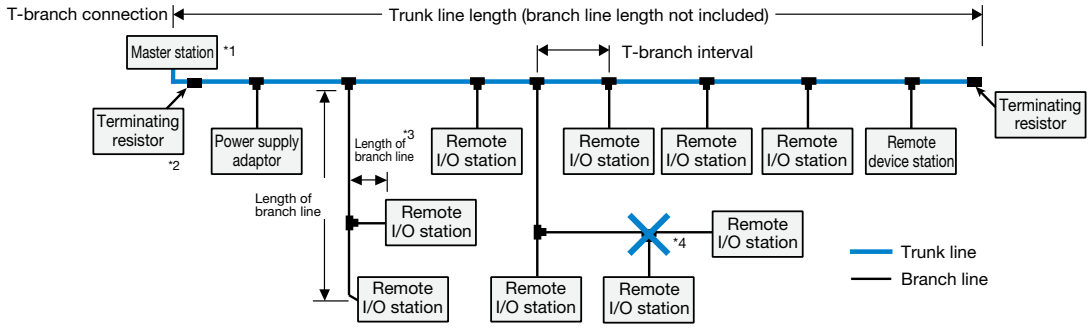

Item	Specifications			Remarks
Transmission speed	2.5Mbps	625 kbps	156kbps	–
Distance between stations	No restriction			–
Maximum number of modules on a branch line	8 modules			–
Length of trunk line	35m	100 m	500m	Cable length between 2 terminating resistors (Branch line length not included)
T-branch interval	No restriction			–
Maximum length of branch line	4m	16 m	60m	Cable length per branch line
Overall length of branch lines	15m	50 m	200m	Total length of all branch lines

*1 Always install the master module at one end of the trunk line.
*2 Install a terminating resistor near the master module (within 20 cm).
*3 The length of a line branched from a branch line is also included in the max. branch line length and overall branch line length.
*4 Cables cannot be connected between drop lines. Line branching is allowed to the second level. Line branching is not allowed for the third or further level.

Precautions when mixed cables are used

1. *Different types of cables cannot be used together in the trunk line.*
2. *Dedicated flat cables, VCTF cables and flexible cables can be used together for branch lines.*
   * The wiring specifications do not change according to the used cables and mixed use of cables.
3. *Different types of cables cannot be used together on the same branch line.*
   * When the module with cable (e.g. CL1Y2-T1D2S) is used, it can be connected to a different type of cable by making sure the dedicated cables in within 20 cm.

CC-Link Partner Association (CLPA) - Actively promoting worldwide adoption of CC-Link networks

Proactively supporting CC-Link, from promotion to specification development

The CC-Link Partner Association (CLPA) was established to promote the worldwide adoption of the CC-Link open-field network. By conducting promotional activities such as organizing trade shows and seminars, conducting conformance tests, and providing catalogs, brochures and website information, CLPA activities are successfully increasing the number of CC-Link partner manufacturers and CC-Link-compatible products. As such, CLPA is playing a major role in the globalization of CC-Link.

Seminar



Trade show

Conformance testing lab

Visit the CLPA website for the latest CC-Link information.

URL:www.cc-link.org

6F Ozone Front Bldg. 3-15-58 Ozone
Kita-ku, Nagoya 462-0825, JAPAN
TEL: +81-52-919-1588 FAX: +81-52-916-8655
E-mail:info@cc-link.org

CC-Link
Partner Association

Global influence of CC-Link continues to spread

CC-Link is supported globally by CLPA. With offices throughout the world, support for partner companies can be found locally. Each regional CLPA office undertakes various support and promotional activities to further the influence of CC-Link/CC-Link IE in that part of the world. For companies looking to increase their presence in their local area, CLPA is well placed to assist these efforts through offices in all major regions.

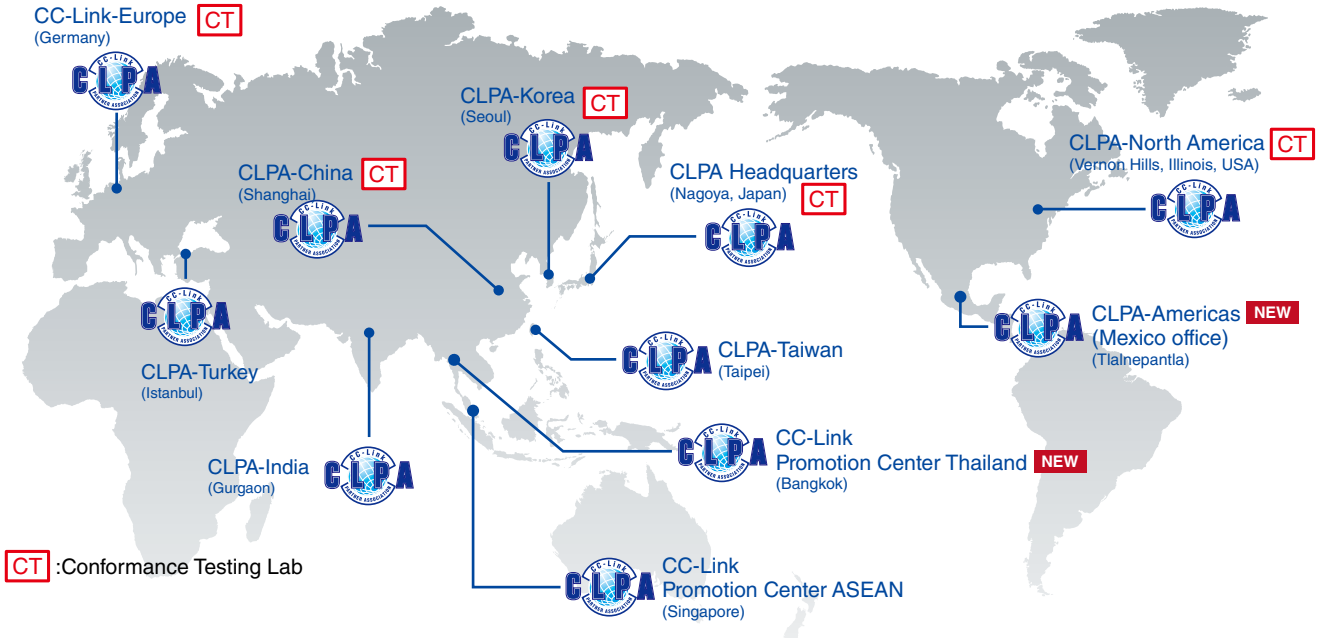

CC-Link IE Control
CC-Link IE Field
CC-Link
CC-Link/LT

Related Product List

Products

Development Application		Name	Model (for Ordering)	Packaging Unit
CC-Link IE Control	Control station, normal station	CC-Link IE Control Network PC Interface Board	Q80BD-J71GP21-SX	1 board
			Q81BD-J71GP21-SX	
		CC-Link IE Control Network PC Interface Board (with external power supply function)	Q80BD-J71GP21S-SX	1 board
			Q81BD-J71GP21S-SX	
CC-Link IE Field	Master station	Source Code Development CD-ROM	SW1DNC-EFI210SRC	1 copy
		Dedicated Communication LSI CP210 (PC08003N)	NZ2GACP210-60	60 pieces
			NZ2GACP210-300	300 pieces
	Master station, local station	CC-Link IE Field Network PC Interface Board	Q80BD-J71GF11-T2	1 board
			Q81BD-J71GF11-T2	
	Intelligent device station	Dedicated Communication LSI CP220 (PC08004N)	NZ2GACP220-60	60 pieces
			NZ2GACP220-300	300 pieces
	Intelligent device station, Remote device station	Communication LSI CP520 with GbE-PHY (PC15001R-B)	NZ2GACP520-60	60 pieces
			NZ2GACP520-300	300 pieces
CC-Link	Master station, local station, intelligent device station	CC-Link Ver.2 Built-In Interface Board	Q50BD-CCV2	1 board
		CC-Link Ver.2 Object Development Kit •CC-Link Ver.2 Object Development CD-ROM •CC-Link Ver. 2 Object Development Reference Manual SH(NA)-080701ENG	SW1D5C-CCV2OBJ-E	1 set
		Dedicated Communication LSI MFP1N (PC96002M-C)	A6GA-CCMFP1NN60F	60 pieces
			A6GA-CCMFP1NN300F	300 pieces
		Device Kit (Flash ROM X 1, CPLD X 2)	Q6KT-NPC2OG51	40 sets
	Master station, local station	CC-Link Ver. 2 PC Interface Board	Q80BD-J61BT11N	1 board
			Q81BD-J61BT11	1 board
	Remote device station	Dedicated Communication LSI MFP3N (PC03003N)	A6GA-CCMFP3NN60F	60 pieces
			A6GA-CCMFP3NN300F	300 pieces
	Remote I/O station	Dedicated Communication LSI MFP2N (PC03002N)	A6GA-CCMFP2NN60F	60 pieces
			A6GA-CCMFP2NN300F	300 pieces
		Dedicated Communication LSI MFP2AN (PC97007N)	A6GA-CCMFP2ANN60F	60 pieces
			A6GA-CCMFP2ANN300F	300 pieces
		CC-Link Embedded I/O Adapter	AJ65MBTL1N-16DT	1 piece
			AJ65MBTL1N-16D	
			AJ65MBTL1N-16T	
			AJ65MBTL1N-32D	
			AJ65MBTL1N-32T	
CC-Link/LT	Master station	Dedicated Communication LSI CLC13 (PC02003E-A)	CL2GA13-60	60 pieces
	Remote device station	Dedicated Communication LSI CLC31 (PC02004N-A)	CL2GA31-60	60 pieces
	Remote I/O station	Dedicated Communication LSI CLC21 (PC01003N)	CL2GA21-60	60 pieces
			CL2GA21-300	300 pieces

Manual

Development Application		Title	Manual No.
CC-Link IE Control	Control station, normal station	CC-Link IE Q80BD-J71GP21-SX Driver Development Reference Manual	SH(NA)-080819ENG
CC-Link IE Field	Master station	CC-Link IE Field Network Source Code Development Master Station Communication LSI CP210 Reference Manual	SH(NA)-081455ENG
	Master station, local station	CC-Link IE Field Network Q80BD-J71GF11-T2/Q81BD-J71GF11-T2 Driver Development Reference Manual	SH(NA)-081155ENG
	Intelligent device station	CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual	SH(NA)-081017ENG
		CC-Link IE Field Network Intelligent Device Station Communication LSI CP220 Reference Manual (Motion function)	SH(NA)-030204ENG
	Intelligent device station, remote device station	CC-Link IE Field Network Intelligent Device Station and Remote Device Station Communication LSI CP520 with GbE-PHY Reference Manual	SH(NA)-081570ENG
CC-Link	Master station, local station, intelligent device station	CC-Link Ver.2 Built-In Interface Board Reference Manual	SH(NA)-080700ENG
		CC-Link Ver.2 Object Development Reference Manual	SH(NA)-080701ENG
	Master station, local station	CC-Link Ver.2 Q80BD-J61BT11N Driver Development Reference Manual	SH(NA)-080702ENG
	Remote device station	CC-Link Remote Device Station Communication LSI MFP3N Reference Manual	SH(NA)-080624ENG
	Remote I/O station	CC-Link Remote I/O Station Communication LSI MFP2N Reference Manual	SH(NA)-080622ENG
		CC-Link Remote I/O Station Communication LSI MFP2AN Reference Manual	SH(NA)-080623ENG
		CC-Link Embedded I/O Adapter User's Manual	SH(NA)-080324E
CC-Link/LT	Master station	CC-Link/LT Master Station Communication LSI CLC13 Reference Manual	SH(NA)-080703ENG
	Remote device station	CC-Link/LT Remote Device Station Communication LSI CLC31 Reference Manual	SH(NA)-080704ENG
	Remote I/O station	CC-Link/LT Remote I/O Station Communication LSI CLC21 Reference Manual	SH(NA)-080707ENG

CC-Link IE Control
CC-Link IE Field
CC-Link
CC-Link/LT

Warranty

Please confirm the following product warranty details before using the product.

Gratis Warranty Term and Gratis Warranty Range

If any faults or defects (hereinafter "Failure") found to be the responsibility of Mitsubishi occurs during use of the product within the gratis warranty term, the product shall be repaired [replaced for the dedicated communication LSI and device kit free of charge] at no cost via the sales representative or Mitsubishi Service Company.
However, if repairs are required onsite at domestic or overseas location, expenses to send an engineer will be solely at the customer's discretion. Mitsubishi shall not be held responsible for any re-commissioning, maintenance, or testing on-site that involves replacement of the failed product.

Gratis Warranty Term

The gratis warranty term of the product shall be for one(1) year after the date of purchase or delivery to a designated place.
Note that after manufacture and shipment of the product from Mitsubishi, the maximum distribution period shall be six (6) months, and the longest gratis warranty term after manufacturing shall be eighteen (18) months.
The gratis warranty term of repair parts shall not exceed the gratis warranty term before repairs.

Gratis Warranty Range

(1) The range shall be limited to normal use within the usage state, usage methods and usage environment, etc., which follow the conditions and precautions, etc., given in the instruction manual, user's manual and caution labels on the product.

(2) Even within the gratis warranty term, repairs [the cost of replacement for the dedicated communication LSI and device kit] shall be charged for in the following cases.

1. Failure occurring from inappropriate storage or handling, carelessness or negligence by the user. Failure caused by the user's hardware or software design.
2. Failure caused by unapproved modifications, etc., to the product by the user.
3. When the Mitsubishi product is assembled into a user's device, Failure that could have been avoided if functions or structures, judged as necessary in the legal safety measures the user's device is subject to or as necessary by industry standards, had been provided.
4. Failure caused by external irresistible forces such as fires or abnormal voltages, and Failure caused by force majeure such as earthquakes, lightning, wind and water damage.
5. Failure caused by reasons unpredictable by scientific technology standards at time of shipment from Mitsubishi.
6. Any other failure found not to be the responsibility of Mitsubishi or that admitted not to be so by the user.

Handling after discontinuation of production

(1) Mitsubishi shall accept onerous product repairs for seven (7) years after production of the product is discontinued.Discontinuation of production shall be notified with Mitsubishi Technical Bulletins, etc.

(2) Product supply (including repair parts) is not available after production is discontinued.

Customer service

(1) When the cause of failure requires an investigation, Mitsubishi shall conduct the investigation using the dedicated LSI only. Remove the dedicated LSI from the product in which it is incorporated and bring it to Mitsubishi. Mitsubishi will not conduct business travel in connection with the investigation.

(2) Overseas, repairs shall be accepted [replacements shall be provided for the dedicated communication LSI and device kit] by Mitsubishi's local FA Centers. Note that the repair conditions [the conditions under which replacements are provided for the dedicated communication LSI and device kit] at each FA Center may differ.

Exclusion of loss in opportunity and secondary loss from warranty liability

Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:

(1) Damages caused by any cause found not to be the responsibility of Mitsubishi.

(2) Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.

(3) Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.

(4) Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.

Changes in product specifications

The specifications given in the catalogs, manuals or technical documents are subject to change without prior notice.

Conditions of use for the product

(1) Mitsubishi product ("the PRODUCT") shall be used in conditions;

i) where any problem, fault or failure occurring in the PRODUCT or the overall system in which the PRODUCT is used, if any, shall not lead to any major or serious accident; and

ii) where the backup and fail-safe function are systematically or automatically provided outside of the PRODUCT for the case of any problem, fault or failure occurring in the PRODUCT.

(2) The PRODUCT has been designed and manufactured for the purpose of being used in general industries.

MITSUBISHI SHALL HAVE NO RESPONSIBILITY OR LIABILITY (INCLUDING, BUT NOT LIMITED TO ANY AND ALL RESPONSIBILITY OR LIABILITY BASED ON CONTRACT, WARRANTY, TORT, PRODUCT LIABILITY) FOR ANY INJURY OR DEATH TO PERSONS OR LOSS OR DAMAGE TO PROPERTY CAUSED BY the PRODUCT THAT ARE OPERATED OR USED IN APPLICATION NOT INTENDED OR EXCLUDED BY INSTRUCTIONS, PRECAUTIONS, OR WARNING CONTAINED IN MITSUBISHI'S USER, INSTRUCTION AND/OR SAFETY MANUALS, TECHNICAL BULLETINS AND GUIDELINES FOR the PRODUCT.

("Prohibited Application")

Prohibited Applications include, but not limited to, the use of the PRODUCT in;

- Nuclear Power Plants and any other power plants operated by Power companies, and/or any other cases in which the public could be affected if any problem or fault occurs in the PRODUCT.
- Railway companies or Public service purposes, and/or any other cases in which establishment of a special quality assurance system is required by the Purchaser or End User.
- Aircraft or Aerospace, Medical applications, Train equipment, transport equipment such as Elevator and Escalator, Incineration and Fuel devices, Manned transportation, Equipment for Recreation and Amusement, Safety devices, handling of Nuclear or Hazardous Materials or Chemicals, Mining and Drilling, and/or other applications where there is a significant risk of injury to the public or property.

Notwithstanding the above restrictions, Mitsubishi may in its sole discretion, authorize use of the PRODUCT in one or more of the Prohibited Applications, provided that the usage of the PRODUCT is limited only for the specific applications agreed to by Mitsubishi and provided further that no special quality assurance which exceed the general specifications of the PRODUCTs are required. For details, please contact the Mitsubishi representative in your region.

Memo

Memo

Precautions before use

This publication explains the typical features and functions of the products herein and does not provide restrictions and other information related to usage and module combinations. Before using the products, always read the product user manuals. Mitsubishi Electric will not be held liable for damage caused by factors found not to be the cause of Mitsubishi Electric; opportunity loss or lost profits caused by faults in Mitsubishi Electric products; damage, secondary damage, or accident compensation, whether foreseeable or not, caused by special factors; damage to products other than Mitsubishi Electric products; and to other duties.

⚠ For safe use

- To use the products given in this publication properly, always read the relevant manuals before use.
- The products have been manufactured as general-purpose parts for general industries, and have not been designed or manufactured to be incorporated in a device or system used in purposes related to human life.
- Before using the products for special purposes such as nuclear power, electric power, aerospace, medicine or passenger movement vehicles, consult with Mitsubishi.
- The products have been manufactured under strict quality control. However, when installing the products where major accidents or losses could occur if the products fail, install appropriate backup or fail-safe functions in the system.

YOUR SOLUTION PARTNER

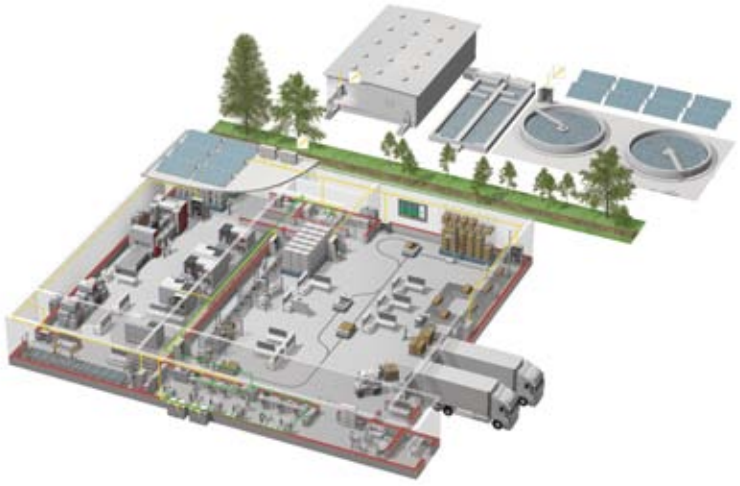

Mitsubishi Electric offers a wide range of automation equipment from PLCs and HMIs to CNC and EDM machines.

A NAME TO TRUST

Since its beginnings in 1870, some 45 companies use the Mitsubishi name, covering a spectrum of finance, commerce and industry.

The Mitsubishi brand name is recognized around the world as a symbol of premium quality.

Mitsubishi Electric Corporation is active in space development, transportation, semi-conductors, energy systems, communications and information processing, audio visual equipment and home electronics, building and energy management and automation systems, and has 237 factories and laboratories worldwide in over 121 countries.

This is why you can rely on Mitsubishi Electric automation solution - because we know first hand about the need for reliable, efficient, easy-to-use automation and control in our own factories.

As one of the world's leading companies with a global turnover of over 4 trillion Yen (over $40 billion), employing over 100,000 people, Mitsubishi Electric has the resource and the commitment to deliver the ultimate in service and support as well as the best products.

Low voltage: MCCB, MCB, ACB

Medium voltage: VCB, VCC

Power monitoring, energy management

Compact and Modular Controllers

Inverters, Servos and Motors

Visualisation: HMIs

Numerical Control (NC)

Robots: SCARA, Articulated arm

Processing machines: EDM, Lasers, IDS

Transformers, Air conditioning, Photovoltaic systems

* Not all products are available in all countries.

Open Field Network
CC-Link Family Compatible Product Development Guidebook

Country/Region	Sales office	Tel/Fax
USA	MITSUBISHI ELECTRIC AUTOMATION, INC. 500 Corporate Woods Parkway, Vernon Hills, IL 60061, U.S.A.	Tel : +1-847-478-2100 Fax : +1-847-478-2253
Mexico	MITSUBISHI ELECTRIC AUTOMATION, INC. Mexico Branch Boulevard Miguel de Cervantes Saavedra 301, Torre Norte Piso 5, Ampliacion Granada, Miguel Hidalgo, Ciudad de Mexico, Mexico, C.P.115200	Tel : +52-55-3067-7512
Brazil	MITSUBISHI ELECTRIC DO BRASIL COMERCIO E SERVICOS LTDA. Avenida Adelino Cardana, 293, 21 andar, Bethaville, Barueri SP, Brasil	Tel : +55-11-4689-3000 Fax : +55-11-4689-3016
Germany	MITSUBISHI ELECTRIC EUROPE B.V. German Branch Mitsubishi-Electric-Platz 1, 40882 Ratingen, Germany	Tel : +49-2102-486-0 Fax : +49-2102-486-7780
UK	MITSUBISHI ELECTRIC EUROPE B.V. UK Branch Travellers Lane, UK-Hatfield, Hertfordshire, AL10 8XB, U.K.	Tel : +44-1707-28-8780 Fax : +44-1707-27-8695
Ireland	MITSUBISHI ELECTRIC EUROPE B.V. Irish Branch Westgate Business Park, Ballymount, Dublin 24, Ireland	Tel : +353-1-4198800 Fax : +353-1-4198890
Italy	MITSUBISHI ELECTRIC EUROPE B.V. Italian Branch Centro Direzionale Colleoni - Palazzo Sirio, Viale Colleoni 7, 20864 Agrate Brianza (MB), Italy	Tel : +39-039-60531 Fax : +39-039-6053-312
Spain	MITSUBISHI ELECTRIC EUROPE, B.V. Spanish Branch Carretera de Rubi, 76-80-Apdo. 420, E-08190 Sant Cugat del Valles (Barcelona), Spain	Tel : +34-935-65-3131 Fax : +34-935-89-1579
France	MITSUBISHI ELECTRIC EUROPE B.V. French Branch 25, Boulevard des Bouvets, 92741 Nanterre Cedex, France	Tel : +33-1-55-68-55-68 Fax : +33-1-55-68-57-57
Czech Republic	MITSUBISHI ELECTRIC EUROPE B.V. Czech Branch, Prague Office Pekarska 621/7, 155 00 Praha 5, Czech Republic	Tel : +420-255-719-200
Poland	MITSUBISHI ELECTRIC EUROPE B.V. Polish Branch ul. Krakowska 48, 32-083 Balice, Poland	Tel : +48-12-347-65-00
Sweden	MITSUBISHI ELECTRIC EUROPE B.V. (Scandinavia) Hedvig Mollersgata 6, 223 55 Lund, Sweden	Tel : +46-8-625-10-00 Fax : +46-46-39-70-18
Russia	MITSUBISHI ELECTRIC (RUSSIA) LLC St. Petersburg Branch Piskarevsky pr. 2, bld 2, lit “Sch”, BC “Benua”, office 720; 195027 St. Petersburg, Russia	Tel : +7-812-633-3497 Fax : +7-812-633-3499
Turkey	MITSUBISHI ELECTRIC TURKEY A.S Umraniye Branch Serifali Mahallesi Nutuk Sokak No:5, TR-34775 Umraniye/Istanbul, Turkey	Tel : +90-216-526-3990 Fax : +90-216-526-3995
UAE	MITSUBISHI ELECTRIC EUROPE B.V. Dubai Branch Dubai Silicon Oasis, P.O.BOX 341241, Dubai, U.A.E.	Tel : +971-4-3724716 Fax : +971-4-3724721
South Africa	ADROIT TECHNOLOGIES 20 Waterford Office Park, 189 Witkoppen Road, Fourways, South Africa	Tel : +27-11-658-8100 Fax : +27-11-658-8101
China	MITSUBISHI ELECTRIC AUTOMATION (CHINA) LTD. Mitsubishi Electric Automation Center, No.1386 Hongqiao Road, Shanghai, China	Tel : +86-21-2322-3030 Fax : +86-21-2322-3000
Taiwan	SETSUYO ENTERPRISE CO., LTD. 6F, No.105, Wugong 3rd Road, Wugu District, New Taipei City 24889, Taiwan	Tel : +886-2-2299-2499 Fax : +886-2-2299-2509
Korea	MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD. 7F to 9F, Gangseo Hangang Xi-tower A, 401, Yangcheon-ro, Gangseo-Gu, Seoul 07528, Korea	Tel : +82-2-3660-9569 Fax : +82-2-3664-8372
Singapore	MITSUBISHI ELECTRIC ASIA PTE. LTD. 307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943	Tel : +65-6473-2308 Fax : +65-6476-7439
Thailand	MITSUBISHI ELECTRIC FACTORY AUTOMATION (THAILAND) CO., LTD. 12th Floor, SV.City Building, Office Tower 1, No. 896/19 and 20 Rama 3 Road, Kwaeng Bangpongpang, Khet Yannawa, Bangkok 10120, Thailand	Tel : +66-2682-6522 Fax : +66-2682-6020
Vietnam	MITSUBISHI ELECTRIC VIETNAM COMPANY LIMITED Unit 01-04, 10th Floor, Vincom Center, 72 Le Thanh Ton Street, District 1, Ho Chi Minh City, Vietnam	Tel : +84-28-3910-5945 Fax : +84-28-3910-5947
Indonesia	PT. MITSUBISHI ELECTRIC INDONESIA Gedung Jaya 8th Floor, JL. MH. Thamrin No.12, Jakarta Pusat 10340, Indonesia	Tel : +62-21-31926461 Fax : +62-21-31923942
India	MITSUBISHI ELECTRIC INDIA PVT. LTD. Pune Branch Emerald House, EL-3, J Block, M.I.D.C., Bhosari, Pune-411026, Maharashtra, India	Tel : +91-20-2710-2000 Fax : +91-20-2710-2100
Australia	MITSUBISHI ELECTRIC AUSTRALIA PTY. LTD. 348 Victoria Road, P.O. Box 11, Rydalmere, N.S.W 2116, Australia	Tel : +61-2-9684-7777 Fax : +61-2-9684-7245

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO 14001 (standards for environmental management systems) and ISO 9001 (standards for quality assurance management systems).

ISO 14001 JACO EC 98 J 2017 — UKAS MANAGEMENT SYSTEMS 0051

ISO 9001 BUREAU VERITAS Certification — UKAS MANAGEMENT SYSTEMS 0008

MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

www.MitsubishiElectric.com

L(NA)08052E-E 1607 ⟨IP⟩

New publication, effective Jul. 2016.
Specifications are subject to change without notice.