

非常用照明器具・電源別置式



20W×2+40Wミニ電球 (ソケット露出形) (FB-2922Sタイプ) (本文48ページ)

FB-C2-2922S

白色
重さ: 2.9kg
使用ソケット: W-19
使用つまみネジ: A-9
鉄板厚さ: 0.6(本体・反射板)

使用ランプ: FL20S, 40Wミニ電球

本体: K-C2-2942S
反射板: P-C2-2822S

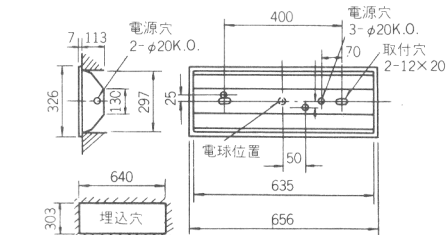

安定器仕様	価格(¥)	
	100V	200V
FB-C2-2922S		
L	11,500	○
本体・反射板・ランプ別梱包 電球同梱包		
本体K-C2-2942S		
L	9,300	○
反射板P-C2-2822S	2,200	○

		0.25Lx				0.5Lx				1.0Lx							
		2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	
配光の種類	B ← O → B A M=0.75	方															
		O-A	4.6	5.4	6.0	6.6	7.1	4.1	4.7	5.0	5.3	5.5	3.5	3.8	3.9	3.9	4.0
		O-B	6.8	7.3	7.7	7.9	8.2	5.2	5.6	5.9	5.8	6.1	4.1	4.2	4.3	4.3	4.3



20W×2+40Wミニ電球 (ソケット隠ぺい形) (FB-2952Sタイプ) (本文48ページ)

FB-C2-2952S

白色
重さ: 2.9kg
使用ソケット: W-19
使用つまみネジ: A-9
鉄板厚さ: 0.6(本体・反射板)

使用ランプ: FL20S, 40Wミニ電球

本体: K-C2-2942S
反射板: P-C2-2852S

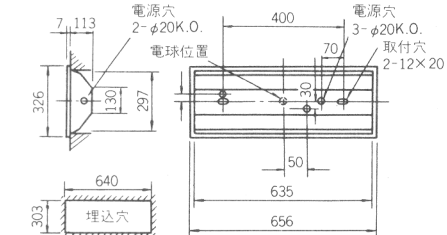

		価格(¥)	
		100V	200V
FB-C2-2952S			
L	13,900	○	
本体・反射板・ランプ別梱包 電球同梱包			
本体K-C1-2942S			
L	9,300	○	
反射板P-C2-2852S	4,600	○	



		0.25Lx				0.5Lx				1.0Lx							
		2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	
配光の種類	B ← O → B A M=0.75	方															
		O-A	4.6	5.4	6.0	6.6	7.1	4.1	4.7	5.0	5.3	5.5	3.5	3.8	3.9	3.9	4.0
		O-B	6.8	7.3	7.7	7.9	8.2	5.2	5.6	5.9	5.8	6.1	4.1	4.2	4.3	4.3	4.3

40W×1+40Wミニ電球 (ソケット露出形) (FB-4801S-Rタイプ) (本文46ページ)

FB-C2-4801S-R 注文

白色
重さ: 4.6kg
使用ソケット: W-19
使用つまみネジ: A-7
鉄板厚さ: 0.5(本体)0.6(反射板)

使用ランプ: FLR40S/M
40Wミニ電球

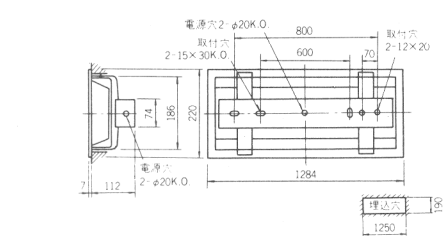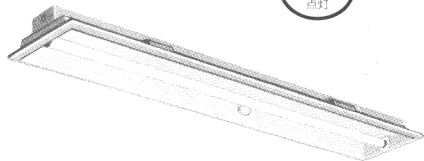

		価格(¥)	
		100V	200V
FB-C2-4801S-R			
RH	11,100	△	10,860
ランプ別梱包 電球同梱包			



		0.25Lx				0.5Lx				1.0Lx							
		2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	
記号の種類	B ← O → B A M=0.75	方															
		O-A	5.1	5.7	6.2	6.6	7.1	4.3	4.7	5.0	5.1	5.1	3.5	3.6	3.5	3.5	3.2
		O-a	6.2	6.5	7.1	7.5	7.9	5.0	5.3	5.6	5.8	6.0	3.9	4.2	4.3	4.4	4.3
		O-B	6.9	7.4	7.8	8.0	8.1	5.2	5.6	5.8	5.8	5.9	4.1	4.2	4.1	4.0	4.0

40W×1+40Wミニ電球 (ソケット隠ぺい形) (FB-4831S-Rタイプ) (本文46ページ)

FB-C2-4831S-R 注文

白色
重さ: 4.6kg
使用ソケット: W-19
使用つまみネジ: A-7
鉄板厚さ: 0.5(本体)0.6(反射板)

使用ランプ: FLR40S/M
40Wミニ電球

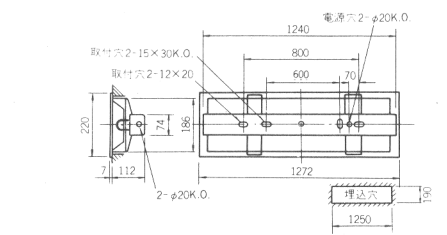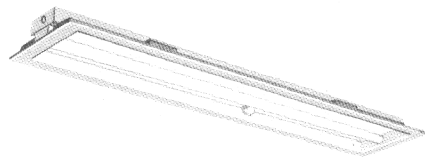

		価格(¥)	
		100V	200V
FB-C2-4831S-R			
RH	11,760	△	11,520
ランプ別梱包 電球同梱包			

		0.25Lx				0.5Lx				1.0Lx							
		2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	
記号の種類	B ← O → B A M=0.75	方															
		O-A	5.1	5.7	6.2	6.6	7.1	4.3	4.7	5.0	5.1	5.1	3.5	3.6	3.5	3.5	3.2
		O-a	6.2	6.5	7.1	7.5	7.9	5.0	5.3	5.6	5.8	6.0	3.9	4.2	4.3	4.4	4.3
		O-B	6.9	7.4	7.8	8.0	8.1	5.2	5.6	5.8	5.8	5.9	4.1	4.2	4.1	4.0	4.0



40W×1+40Wミニ電球 (ソケット露出形) (FB-4881S-Rタイプ) (本文52ページ)

FB-C2-4871S-R 注文

白色
重さ: 4.6kg
使用ソケット: W-19
使用つまみネジ: A-7
鉄板厚さ: 0.5(本体)0.6(反射板)

適合連結金具: RE-B-15

使用ランプ: FLR40S/M
40Wミニ電球

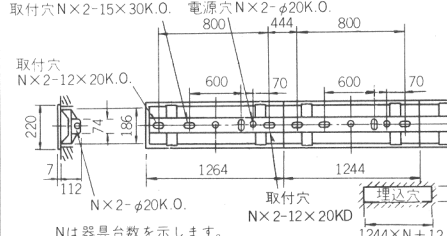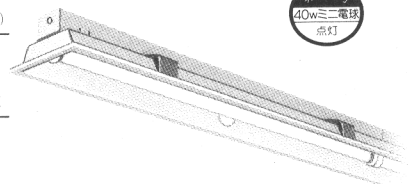

		価格(¥)	
		100V	200V
FB-C2-4871S-R			
RH	11,380	△	11,180
ランプ別梱包 電球同梱包			
*中央の電源穴は使用できません。但し安定器を移動すれば使用できます。このとき500ピッチの取付穴は使用できません。			

		0.25Lx				0.5Lx				1.0Lx							
		2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	2.0	2.5	3.0	3.5	4.0	
記号の種類	B ← O → B A M=0.75	方															
		O-A	5.1	5.7	6.2	6.6	7.1	4.3	4.7	5.0	5.1	5.1	3.5	3.6	3.5	3.5	3.2
		O-a	6.2	6.5	7.1	7.5	7.9	5.0	5.3	5.6	5.8	6.0	3.9	4.2	4.3	4.4	4.3
		O-B	6.9	7.4	7.8	8.0	8.1	5.2	5.6	5.8	5.8	5.9	4.1	4.2	4.1	4.0	4.0