


「照明器具の正しい使い方(安全上のご注意)」をA1～A39に掲載しておりますので必ずご覧ください。

OA金属ルーバ

V2タイプ

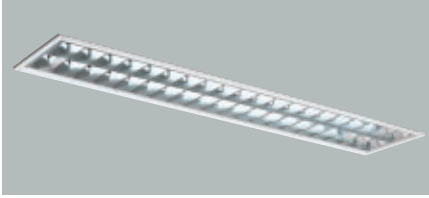

L4852A

△希望小売価格 **20,300円**(税抜)


- ルーバ 銅板・アルミ半鏡面仕上
- 質量 1.0kg

※FHF32EXのみ使用可能

遮光角	横方向	30度
	縦方向	30度

OA金属ルーバ

V3タイプ

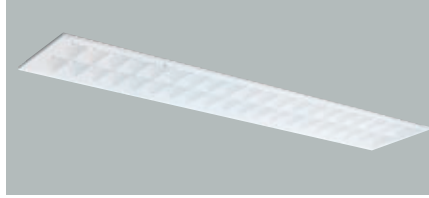

L4862A

△希望小売価格 **20,300円**(税抜)


- ルーバ 銅板・白色仕上
- 質量 1.0kg

※FHF32EXのみ使用可能

遮光角	横方向	30度
	縦方向	30度

YB4002F+L4852Aの場合

■配光曲線




■照明率表

天井	層	照明率 (×0.01)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
70	30	20	40	45	49	53	55	59	61	62	64	65	66	67
	10	27	37	41	44	47	49	51	52	53	54	55	55	56
	30	22	33	38	43	48	50	54	57	59	61	62	64	65
80	50	10	22	32	36	40	44	46	49	50	51	53	54	55
	30	18	29	33	37	42	43	46	49	50	51	52	54	54
	10	16	27	31	35	40	41	45	47	49	50	52	53	54
70	30	26	39	44	48	52	54	57	59	60	61	62	63	64
	10	10	16	21	25	29	32	34	35	36	37	38	39	40
	50	10	21	32	36	40	44	45	48	50	51	52	53	54
50	30	19	29	34	39	44	46	50	53	55	57	59	61	62
	10	18	29	33	37	41	43	46	48	50	51	52	53	54
	30	18	27	30	35	40	41	45	47	48	50	51	52	53
30	30	22	32	37	41	46	48	51	53	54	56	57	58	59
	10	21	31	35	39	43	45	47	49	50	51	52	53	53
	50	18	29	33	38	43	45	48	51	52	54	56	57	58
10	30	18	28	32	37	41	43	46	48	49	50	51	52	53
	10	16	26	30	35	39	41	44	47	48	49	50	51	52
	0	0	0	0	0	0	0	0	0	0	0	0	0	0

YB4002F+L4862Aの場合

■配光曲線




■照明率表

天井	層	照明率 (×0.01)													
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
70	30	25	35	40	44	48	50	54	56	58	59	61	62	63	
	10	23	32	36	39	43	44	47	48	49	50	51	52	53	
	50	19	28	33	37	42	45	49	52	54	56	58	60	62	
80	30	15	24	28	33	38	41	45	49	51	54	56	58	60	
	10	15	23	27	31	36	38	41	44	45	47	49	50	51	
	50	10	13	21	25	29	33	35	39	42	44	46	47	49	
70	30	24	34	38	43	47	49	52	54	56	57	58	60	61	
	10	18	26	30	34	38	40	43	45	47	48	49	50	51	
	50	15	24	28	33	37	40	44	48	50	52	54	57	58	
50	30	18	28	32	37	41	44	48	51	52	55	56	58	60	
	10	18	27	31	36	40	42	45	48	50	52	53	54	55	
	50	10	17	26	30	34	37	39	42	44	46	47	48	49	
30	30	15	24	28	32	36	39	43	46	47	50	51	53	55	
	10	15	23	27	31	35	37	40	43	44	46	47	48	49	
	50	10	13	21	25	29	33	35	38	41	43	45	46	48	
10	30	15	23	27	31	36	38	41	44	45	47	49	50	52	
	10	10	16	20	24	28	30	32	34	35	37	39	41	42	43
	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

ルーバ

2灯用

マルチファイントイプ

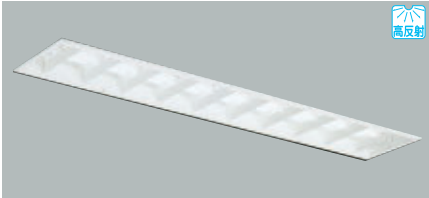

L4802F

L4802Aのモデルチェンジ品

New

△希望小売価格 **8,200円**(税抜)

- ルーバ 銅板・白色仕上(高反射白色塗装)
- 質量 1.0kg

※FHF32EXのみ使用可能

遮光角	横方向	15度
	縦方向	15度

乳白アクリルカバー



B4332A


△希望小売価格 **8,600円**(税抜)

- 枠 銅板・白色仕上
- カバー アクリル・乳白色仕上
- 質量 2.0kg

※非常灯には使用できません。

YB4002F+L4802Fの場合

■配光曲線




■照明率表

天井	層	照明率 (×0.01)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
70	30	31	43	50	56	62	65	70	74	76	79	81	83	84
	10	29	39	44	49	54	57	61	64	66	67	69	71	72
	50	22	33	40	47	53	57	63	68	70	74	77	80	82
80	30	21	32	38	43	49	52	56	60	62	64	66	68	69
	10	17	27	33	38	44	47	53	56	59	62	64	66	68
	50	10	14	23	29	34	40	44	49	53	56	60	62	65
70	30	30	42	49	54	60	63	68	71	73	76	78	80	81
	10	28	39	44	49	54	56	60	63	64	66	67	69	70
	50	22	33	40	46	52	56	62	66	68	72	74	77	79
50	30	17	27	34	40	46	50	56	61	64	69	71	75	78
	10	16	26	32	38	44	47	52	56	58	61	63	66	68
	50	10	14	23	29	34	40	43	49	53	56	59	62	64
30	30	21	32	38	44	50	53	58	62	65	68	70	72	74
	10	20	31	36	42	47	50	54	58	60	62	64	66	67
	50	10	13	23	29	34	40	43	48	53	55	58	61	63
10	30	16	26	32	38	44	47	52	56	59	62	64	67	69
	10	16	26	31	37	42	45	50	54	56	59	61	63	65
	0	0	0	0	0	0	0	0	0	0	0	0	0	0

YB4002F+B4332Aの場合

■配光曲線



■照明率表

天井	層	照明率 (×0.01)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
70	30	18	25	30	33	37	39	42	44	45	47	48	50	51
	10	17	23	26	29	32	33	36	37	38	40	41	42	43
	50	13	19	24	27	31	34	37	40	42	45	46	48	50
80	30	12	18	22	25	29	31	33	36	37	38	40	41	42
	10	9	15	19	22	26	28	31	33	35	37	38	40	41
	50	10	8	13	17	20	23	26	29	32	33	36	37	39
70	30	18	25	29	32	35	37	40	43	44	46	47	48	49
	10	17	23	26	29	32	33	36	37	38	40	41	42	43
	50	13	19	23	27	31	33	36	39	41	43	45	46	48
50	30	10	16	19	23	27	29	33	36	38	41	43	45	47
	10	10	12	18	22	26	29	31	33	34	36	37	39	40
	50	10	12	18	21	24	28	29	32	34	35	37	38	39
30	30	9	15	19	23	26	28	32	35	36	39	40	42	44
	10	9	15	18	22	25	27	30	33	34	36	37	39	40
	50	10	8	13	16	20	23	25	29	31	33	35	36	38
10	30	9	15	18	21	25	27	30	32	33	35	37	38	40
	10	8	13	16	20	23	25	28	31	32	34	36	37	39
	0	0	0	0	0	0	0	0	0	0	0	0	0	0

EDK=連続調光形・40~100%連続調光形OFF機能付

電圧

1=100V
2=200V
A=100/200V又は100~200V

2A=200~254V
V=100~254V

納期

○=在庫対応品(配送期間を要します) △=受注生産品(ご注文後2週間を要します) ▲=受注生産品(ご注文後3~5週間を要します)
※希望小売価格には消費税は含まれておりません。
※仕様は予告なしに変更される場合があります。