




YBH4001AF

高出力45W形
VPH (FHF) △¥ **84,000** (税抜) (4520m・47W・96.2m/W)
定格出力32W形
VPN (FHF) △¥ **78,000** (税抜) (3320m・38W・87.4m/W)


- 本体 鋼板・白色仕上(高反射白色塗装)
- 反射板 鋼板・白色仕上(高反射白色塗装)
- 質量 5.0kg
- 電池 7N30AB
- 鋼板厚さ 0.6(本体) 0.4(反射板)

ランプ別梱包
 ■適合部品
 連結金具: REB26 △¥770(税抜) (P.235)
 ■同タイプ器具: YB4001F(P.46)
 ■推奨ランプ: FHF32EX-N-H
 ※ランプ別組合せ価格及びエネルギー消費効率は巻末の一覧表をご覧ください

公共施設形名: K1-FRS15-321

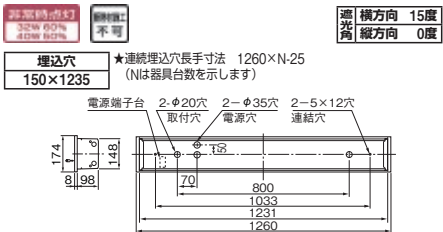


OA金属ルーバ

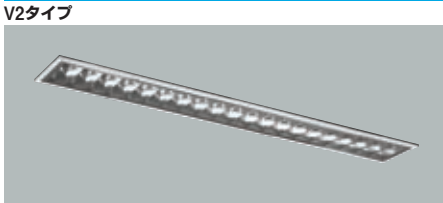

L4121A

▲¥ **16,300** (税抜)
 ●ルーバ 鋼板・アルミ半鏡面仕上
 ●質量 1.2kg

YB4001F+L4121Aの場合
 ■配光曲線

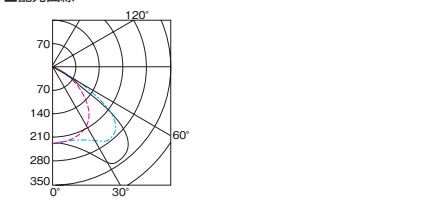

■照明率表

天井	層	照度率(%)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	30	32	45	52	58	63	66	71	74	75	77	79	80	81
	50	30	23	26	30	33	36	40	43	45	48	51	53	55
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	19	31	38	44	51	55	61	65	67	71	73	75	78
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	19	31	38	44	50	53	58	61	63	64	65	66
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	18	30	36	42	48	51	55	58	60	62	63	64

PZ=高出力45W・5~100%連続調光形OFF機能付
 SPN=110W PS形 86W 定格出力(2灯インバータ)
 RUH=ラビッド式高効率1灯用
 RUSH=ラビッド式高効率直列逐次始動方式・多灯用

器具配置表
 YBH4001AF

■FHF32EX-N(32W)の場合
 光束比60.0% 保守率0.70 廊下巾2.00m 照度2.0lx範囲

器具高さ	2.1	2.4	2.6	3	4	5	6	7
躯体配座 A1	4.6	5.0	5.2	5.6	6.4	7.0	7.4	7.5
器座配座 B1	4.7	5.0	5.1	5.4	6.0	6.3	6.5	6.5
器座配座 A2	10.8	11.7	12.2	13.2	15.2	17.2	18.6	19.6
器座配座 B2	11.4	12.1	12.6	13.4	15.0	16.2	17.1	17.8
四角配座 A4	9.3	10.1	10.6	11.6	13.8	15.7	17.2	18.5
四角配座 B4	9.7	10.4	10.9	11.7	13.4	14.8	15.9	16.8


ルーバ 1灯用



L4261F

▲¥ **7,400** (税抜)
 ●ルーバ 鋼板・白色仕上(高反射白色塗装)
 ●質量 1.0kg

YB4001F+L4261Fの場合
 ■配光曲線

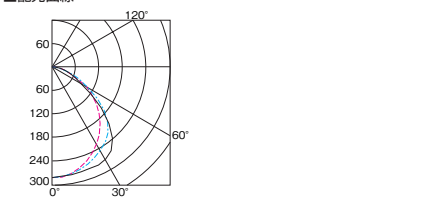


■照明率表

天井	層	照度率(%)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	30	34	48	55	62	68	72	78	81	84	87	89	91	93
	50	30	24	27	31	34	37	41	44	47	50	53	56	59
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	19	31	38	45	52	57	64	69	74	78	81	85	88
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	18	30	36	42	49	52	58	62	65	68	71	73
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	18	30	36	42	48	51	55	59	62	65	68	71

1=100V A=100/200V又は100~200V
 2=200V 2A=200~254V
 V=100~254V


OA金属ルーバ

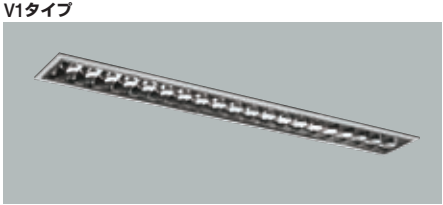

L4111A

▲¥ **16,300** (税抜)
 ●ルーバ 鋼板・アルミ鏡面仕上
 ●質量 1.2kg


YB4001F+L4111Aの場合
 ■配光曲線

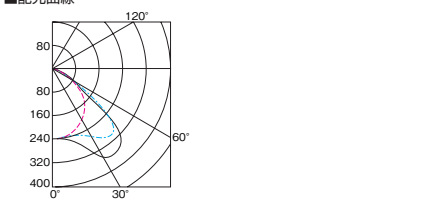

■照明率表

天井	層	照度率(%)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	30	32	45	52	58	63	66	71	74	75	77	79	80	81
	50	30	24	27	31	34	37	41	44	47	50	53	56	59
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	19	31	38	44	51	55	61	65	67	71	73	75	78
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	19	31	38	44	50	53	58	61	63	64	65	66
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	18	30	36	42	48	51	55	58	60	62	63	64


OA金属ルーバ

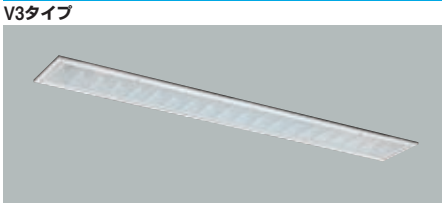

L4131A

▲¥ **16,300** (税抜)
 ●ルーバ 鋼板・白色仕上
 ●質量 1.2kg

YB4001F+L4131Aの場合
 ■配光曲線

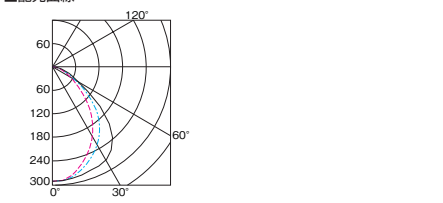

■照明率表

天井	層	照度率(%)												
		0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	30	34	48	55	62	68	72	78	81	84	87	89	91	93
	50	30	24	27	31	34	37	41	44	47	50	53	56	59
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	19	31	38	45	52	57	64	69	74	78	81	85	88
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	18	30	36	42	49	52	58	62	65	68	71	73
	50	10	10	10	10	10	10	10	10	10	10	10	10	10
	70	10	10	10	10	10	10	10	10	10	10	10	10	10
	30	30	17	28	33	38	43	45	50	53	56	59	61	63

○=在庫対応品(配送期間を要します)△=受注生産品(ご注文後2週間を要します)▲=受注生産品(ご注文後3~5週間を要します)
 ※希望小売価格には消費税は含まれておりません。
 ※仕様は予告なしに変更される場合があります。

蛍光灯ベース照明
 ●埋込形