


AKS0015K


諸特性

光源		JDR110V-65WLM/K[100V]			
最大取付間隔		A-A		B-B	
		0.34H		0.34H	
器具 効率	上方光束	0.2%			
	下方光束	88.9%			
	計	89.2%			
保守率		良	0.910	中	0.890 否 0.840

配光曲線図 (cd/1000lm)

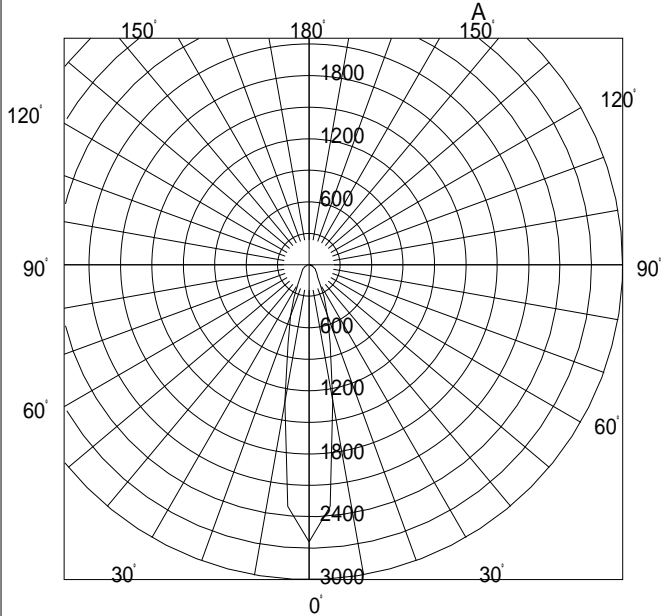

直射水平面照度

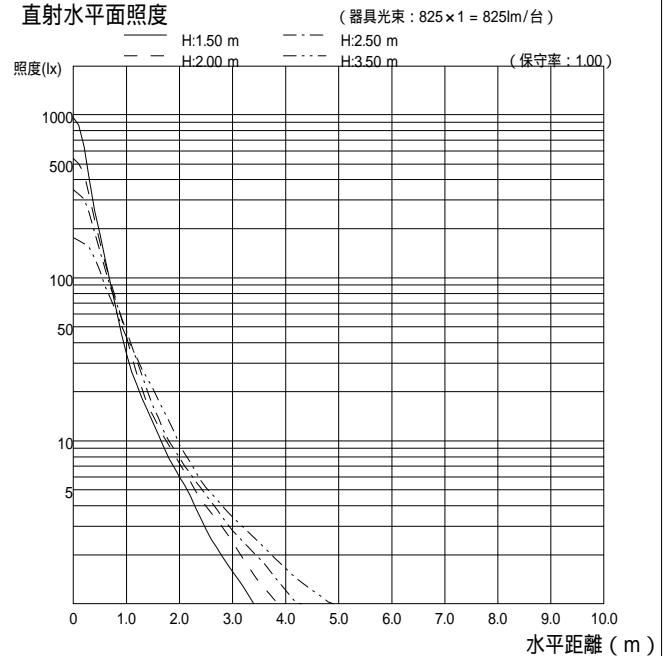

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	50	66	76	82	88	92	97	101	103	107	109	111	113
		10	47	61	69	74	78	81	85	87	89	91	92	93	94
	50	30	40	55	65	72	79	83	90	94	97	102	105	108	111
		10	38	53	61	67	72	75	80	83	85	88	90	92	93
70	30	30	34	49	58	65	72	76	84	89	92	98	101	105	109
		10	33	47	56	62	67	71	76	80	82	86	88	90	92
	70	30	49	65	74	80	86	89	94	98	100	103	105	107	109
		10	47	60	68	73	77	80	84	86	87	90	91	92	93
50	50	30	39	55	64	71	77	81	88	92	95	99	101	105	107
		10	38	52	60	66	71	75	79	82	84	87	89	91	92
	30	30	34	48	58	64	71	75	82	87	90	95	98	102	105
		10	33	47	55	61	67	71	76	79	82	85	87	90	92
30	50	30	39	53	62	68	74	78	84	87	90	93	95	98	100
		10	38	51	59	65	70	73	78	81	83	85	87	89	90
	30	30	33	48	57	63	69	73	79	83	86	90	93	96	99
		10	33	47	55	61	66	70	75	78	80	83	85	88	90
0	30	30	33	47	56	62	67	71	76	80	83	86	88	91	93
	10	10	30	43	51	57	62	66	71	75	77	81	83	85	87
0	0	0	29	42	50	55	61	64	69	73	75	78	80	83	85