



AZ-V2501BM/5	
B1 shadow	
AHZS	




○配光曲線図 (cd/1000lm)

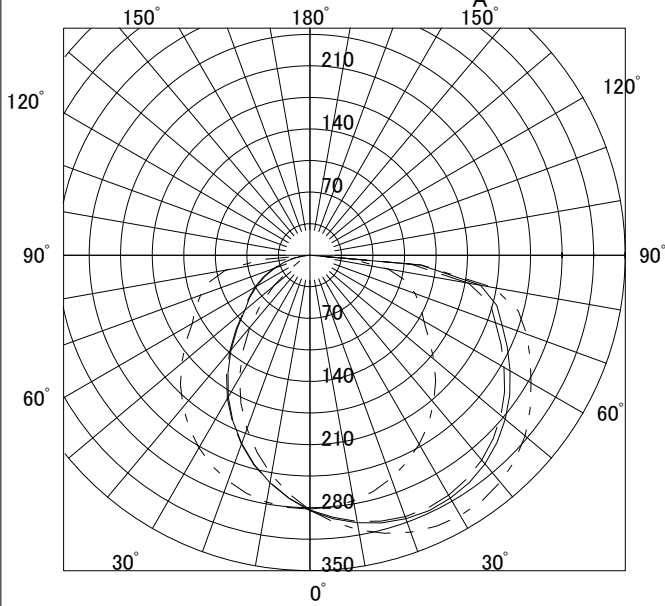

○諸特性

光源		LED128lm 昼消灯				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	0.00H	0.00H	0.00H	0.00H	
	B-B	0.00H	0.00H	0.00H	0.00H	
器具効率	上方光束	下方光束		計		
	0.0%	100.1%		100.1%		
保守率	良い	0.770	普通	0.720	悪い	0.680

○直射水平面照度

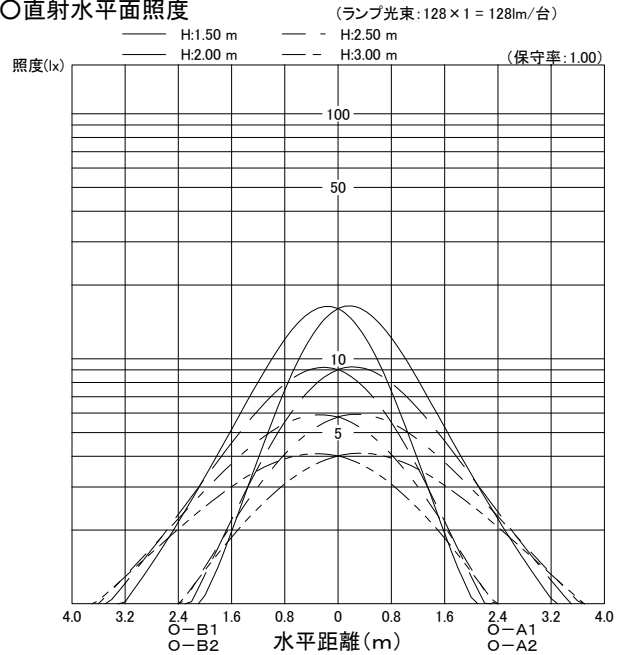

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	59	69	77	86	91	99	104	108	113	117	120	124
		10	41	54	63	69	76	80	86	90	93	96	99	101	103
	50	30	29	44	53	62	71	77	86	93	98	105	109	115	119
		10	28	42	50	57	65	70	77	83	86	91	94	98	101
70	30	30	22	35	43	51	60	66	76	84	90	98	103	110	116
		10	21	34	41	49	57	62	70	76	80	86	90	94	98
	10	70	17	28	35	42	50	55	64	70	75	81	86	91	96
		30	42	57	67	75	82	87	95	101	104	109	112	116	119
50	30	30	29	43	52	60	69	75	84	91	95	101	106	111	115
		10	28	41	49	56	64	69	76	81	85	90	93	96	99
	10	70	17	28	35	42	50	55	63	70	74	81	85	90	95
		30	21	34	41	48	56	61	69	75	79	85	89	93	97
30	30	30	28	42	50	58	66	71	79	85	89	95	99	104	107
		10	27	40	48	55	62	67	74	79	82	87	90	94	97
	10	30	21	34	41	49	57	63	72	79	83	90	94	100	105
		10	21	33	40	47	55	60	68	74	78	83	87	91	95
0	30	30	16	28	35	42	49	54	63	69	73	79	84	89	93
		10	16	28	34	41	49	54	62	68	72	78	82	87	91
	10	10	16	28	34	41	49	54	62	68	72	78	82	87	91
0	0	0	15	26	32	39	46	51	59	65	69	75	79	84	88