



AZ-V2501BM/5

B1 shadow

AHZS



○配光曲線図 (cd/1000lm)

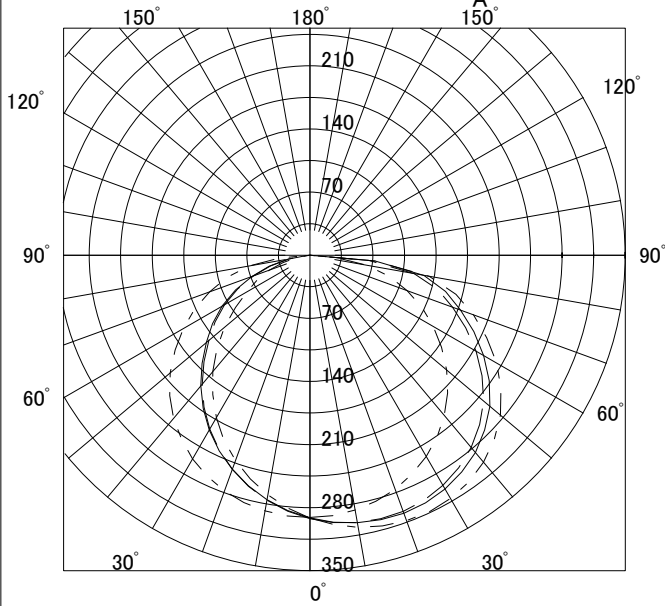


○諸特性

光源		LED320lm 移ろう空 日出入				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	0.00H	0.00H	0.00H	0.00H	
	B-B	0.00H	0.00H	0.00H	0.00H	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.770	普通	0.720	悪い	0.680

○直射水平面照度

(ランプ光束: 320 × 1 = 320lm/台)

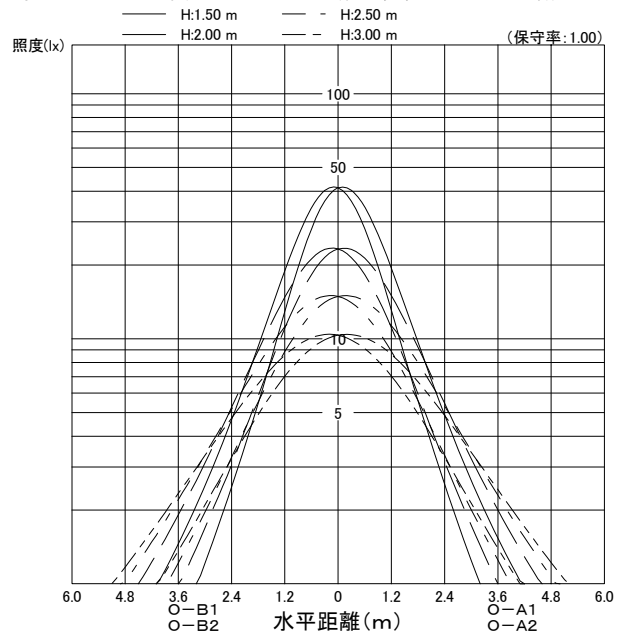

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	60	70	79	87	92	101	106	110	115	118	121	124
		10	41	55	64	71	77	82	88	92	94	98	100	102	104
	50	30	30	45	55	64	73	79	89	96	100	107	111	116	121
		10	29	43	51	59	67	72	79	84	88	93	96	99	102
70	70	30	42	58	68	76	84	89	97	102	106	110	113	117	120
		10	40	54	62	69	76	80	86	90	92	96	98	101	103
	50	30	29	44	53	62	71	77	86	93	97	103	108	112	116
		10	28	42	50	58	66	71	78	83	87	91	94	98	101
50	30	30	22	35	43	51	60	65	74	81	86	92	97	102	106
		10	21	34	42	49	57	62	70	76	80	85	89	93	97
	10	10	17	29	36	44	52	57	65	72	76	82	86	91	95
30	30	30	21	34	42	50	58	63	72	78	82	88	92	96	100
		10	21	33	41	48	56	61	69	75	78	84	87	91	95
0	10	10	17	29	36	43	51	56	65	71	75	81	85	89	93
		0	15	27	34	41	49	54	62	68	72	78	82	86	90