



諸特性

光源		FHP32EN・K					
最大取付間隔		A-A			B-B		
		1.50H			1.35H		
器具効率	上方光束	0.0%					
	下方光束	70.7%					
	計	70.7%					
保守率		良い	0.730	普通	0.690	悪い	0.610

配光曲線図 (cd/1000lm)

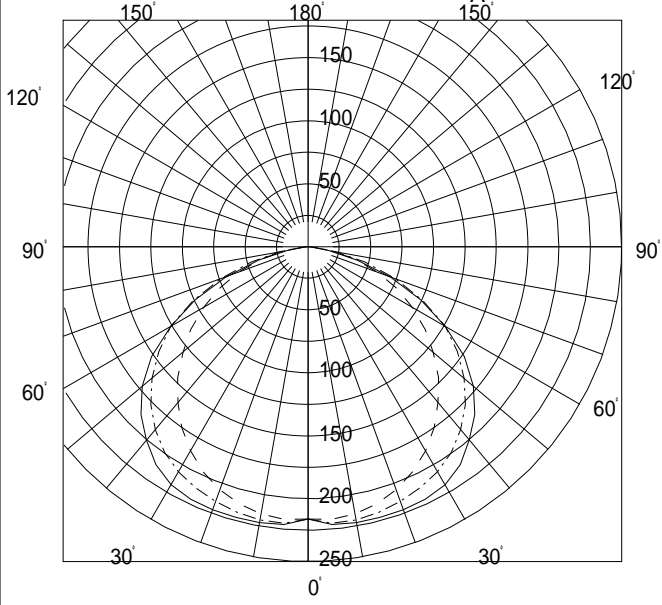

直射水平面照度

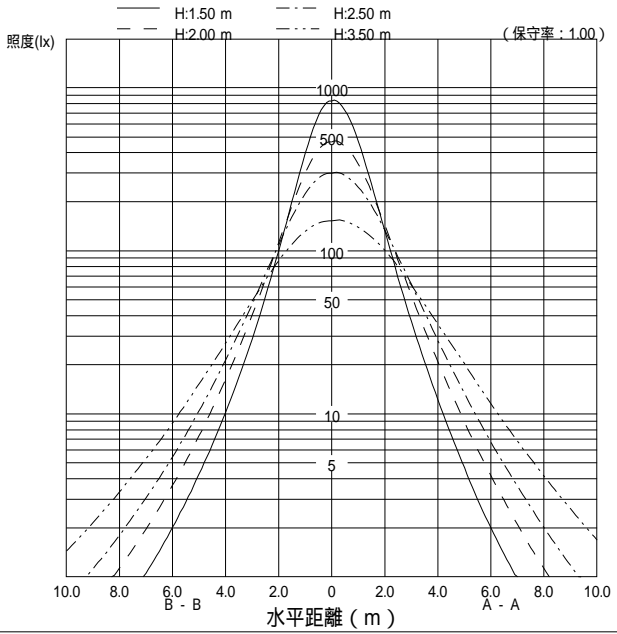

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	31	43	51	57	63	67	72	76	79	82	84	86	88
		10	29	40	46	51	56	59	63	66	68	70	71	73	74
	50	30	21	33	40	47	53	58	65	70	73	77	80	83	86
		10	21	31	37	43	49	52	58	61	64	67	69	71	73
70	30	30	16	26	33	40	47	51	59	64	68	73	76	81	84
		10	16	25	32	38	44	48	53	58	60	64	66	69	71
	50	30	30	42	49	55	61	65	70	74	76	79	81	83	85
		10	28	39	45	50	55	58	62	65	66	69	70	72	73
50	50	30	21	32	39	46	52	56	63	68	71	75	77	81	83
		10	20	31	37	43	48	52	57	61	63	66	68	70	72
	30	30	16	26	33	39	46	50	57	63	66	71	74	78	81
		10	15	25	32	37	43	47	53	57	60	63	66	69	71
30	10	10	12	22	28	33	40	43	50	54	57	61	64	67	70
	50	30	20	31	38	44	50	54	60	64	67	70	73	75	78
		10	20	30	36	42	47	50	56	59	61	64	66	68	70
	30	30	16	26	32	38	45	49	55	60	63	67	70	74	76
0	10	10	12	22	27	33	39	43	49	53	56	60	63	66	68
	30	30	15	25	31	37	43	47	53	57	60	64	67	70	72
10	10	10	12	21	27	33	39	43	48	53	56	59	62	65	67
0	0	0	11	20	26	31	37	41	47	51	54	57	60	63	65