



BCP4233

VPS




配光曲線図 (cd/1000lm)

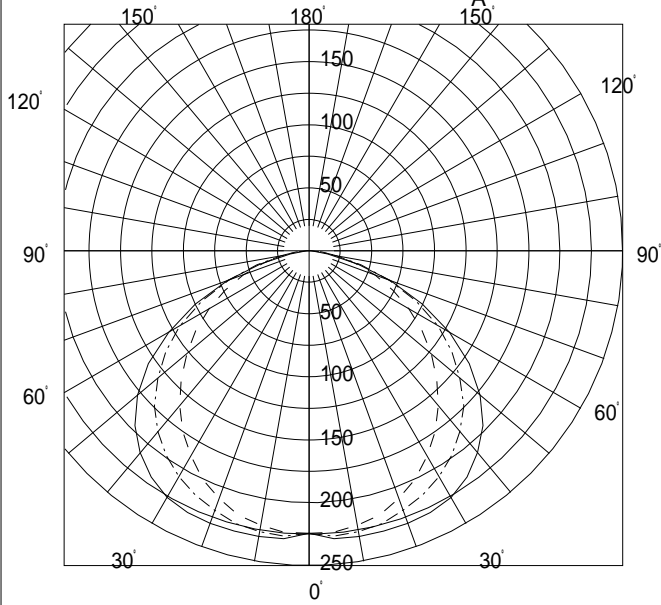

諸特性

光源		FHP32EN・K					
最大取付間隔		A-A 1.50H		B-B 1.32H			
器具 効率	上方光束	0.1%					
	下方光束	70.4%					
	計	70.5%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

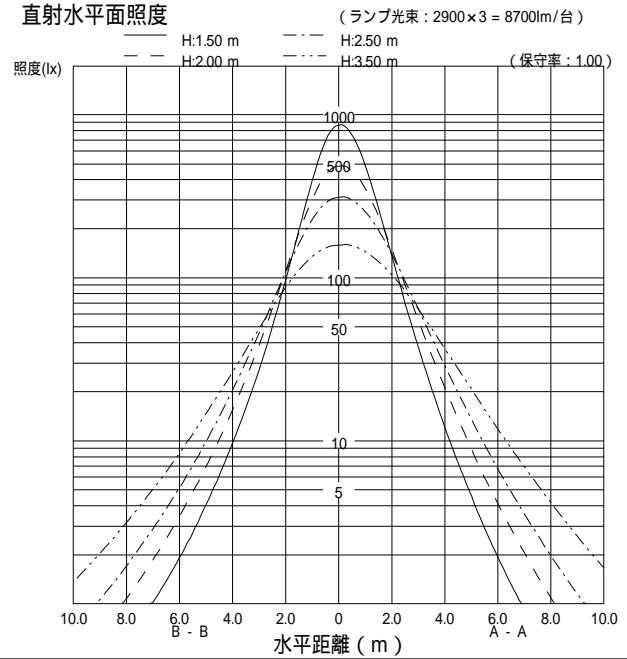

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	31	43	51	57	63	67	72	76	79	82	84	86	88	
		10	29	40	46	51	56	59	63	66	67	70	71	72	74	
	50	30	21	33	40	47	54	58	65	69	73	77	80	83	86	
		10	21	31	38	43	49	53	58	61	64	67	68	71	72	
70	30	30	16	27	33	40	47	51	59	64	68	73	76	80	84	
		10	16	26	32	38	44	48	53	58	60	64	66	69	71	
	50	30	30	30	42	49	55	61	65	70	74	76	79	81	83	85
		10	28	39	45	50	55	58	62	65	66	69	70	71	73	
50	50	30	21	32	39	46	52	57	63	68	71	75	77	80	83	
		10	20	31	37	43	48	52	57	61	63	66	68	70	71	
	30	30	16	26	33	39	46	50	57	63	66	71	74	78	81	
		10	16	26	32	38	44	47	53	57	60	63	66	68	70	
30	50	30	21	31	38	44	50	54	60	64	67	70	73	75	77	
		10	20	30	36	42	47	51	56	59	61	64	66	68	70	
	30	30	16	26	32	38	45	49	55	60	63	67	70	73	76	
		10	16	25	31	37	43	46	52	56	59	62	64	67	69	
0	30	30	16	25	32	37	44	47	53	57	60	64	66	69	71	
	10	10	12	22	27	33	39	43	49	53	56	59	62	65	67	
0	0	0	11	20	26	32	38	41	47	51	54	57	60	63	65	