



BCP5024

VPN




配光曲線図 (cd/1000lm)

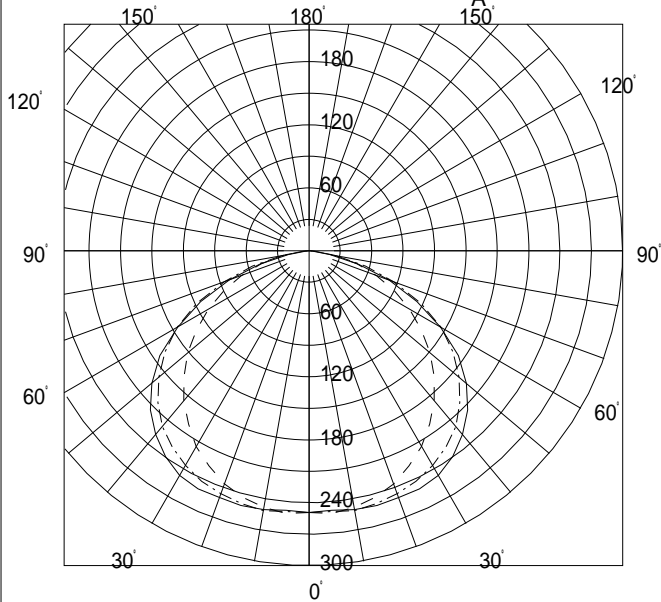

諸特性

光源		FHP45EN・K					
最大取付間隔		A-A		B-B			
		1.56H		1.42H			
器具 効率	上方光束	0.0%					
	下方光束	81.3%					
	計	81.3%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

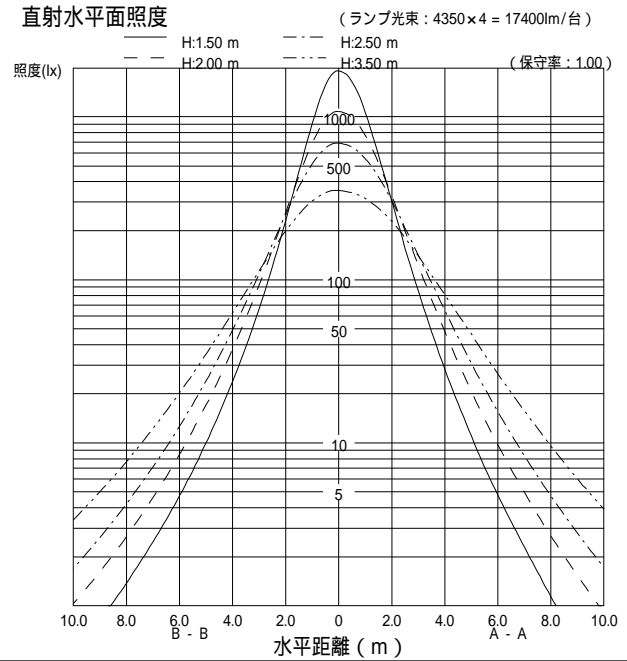

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	49	58	65	72	77	83	88	91	94	97	100	102
		10	33	46	53	59	64	68	72	76	78	80	82	84	85
	50	30	24	37	46	54	61	66	74	80	84	89	92	96	99
		10	24	36	43	50	56	60	66	71	73	77	79	82	83
	30	30	18	30	38	46	54	59	67	74	78	84	88	93	97
70		10	18	29	36	43	50	55	61	66	69	74	76	80	82
	10	10	14	25	32	38	46	50	57	63	66	71	74	78	81
	70	30	35	48	56	63	70	74	80	85	87	91	93	96	98
		10	33	44	52	57	63	66	71	74	76	79	81	83	84
	50	30	24	37	45	52	60	65	72	78	81	86	89	93	96
50		10	23	35	42	49	56	59	66	70	72	76	78	81	83
	30	30	18	30	38	45	53	58	66	72	76	82	85	90	93
		10	18	29	36	43	50	54	61	66	69	73	76	79	81
	10	10	14	25	32	38	45	50	57	62	66	70	73	77	80
	50	30	23	36	43	50	57	62	69	74	77	81	84	87	89
30		10	23	34	41	48	54	58	64	68	71	74	76	79	81
	30	30	18	29	37	44	51	56	63	69	72	77	81	85	88
		10	18	29	36	42	49	53	60	65	68	72	74	77	80
	10	10	14	25	31	38	45	49	56	61	65	69	72	76	79
	30	30	18	29	36	43	50	54	61	66	69	74	77	80	83
0		10	17	28	35	42	48	52	59	63	66	70	73	76	78
	0	0	14	25	31	38	45	49	56	61	64	68	71	75	77
0	0	0	13	23	29	36	43	47	54	59	62	66	69	72	75