
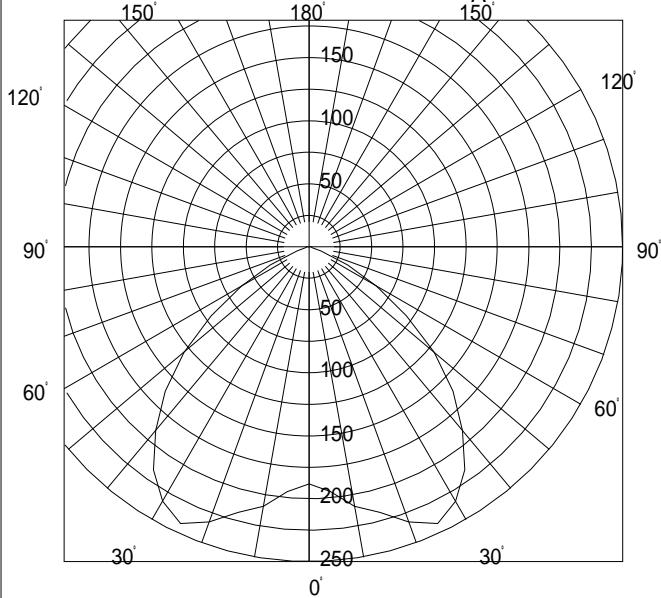


BD22001

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A 1.60H		B-B 1.60H	
器具 効率	上方光束	0.1%			
	下方光束	57.6%			
	計	57.6%			
保守率		良	0.740	中	0.700 否 0.620

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

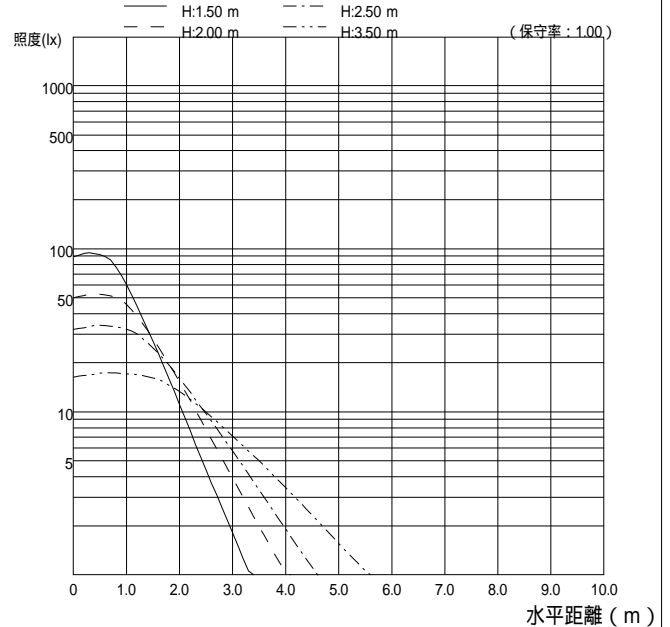

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	28	39	45	50	55	58	62	65	66	68	70	71	72
		10	26	36	41	45	49	51	54	56	57	58	59	60	60
	50	30	20	31	37	43	49	52	57	60	62	65	67	69	71
		10	20	30	35	40	45	47	51	53	54	56	57	59	60
70	30	30	16	26	32	38	44	47	52	56	59	62	64	67	69
		10	16	26	31	36	41	44	48	51	52	55	56	57	59
	70	30	27	38	44	49	54	56	60	63	64	66	67	69	70
		10	26	35	40	44	48	50	53	55	56	57	58	59	60
50	50	30	20	31	37	42	48	51	55	59	60	63	65	67	68
		10	19	29	35	39	44	46	50	52	54	56	57	58	59
	30	30	16	26	32	38	43	46	51	55	57	60	63	65	67
		10	16	26	31	36	41	43	48	50	52	54	55	57	58
30	50	30	20	30	36	41	46	49	53	56	57	60	61	63	64
		10	19	29	34	39	43	45	49	51	53	54	56	57	58
	30	30	16	26	31	37	42	45	50	53	55	57	59	61	63
		10	16	25	30	35	40	43	47	50	51	53	54	56	57
0	30	30	16	25	31	36	41	44	48	51	53	55	56	58	59
	10	10	13	23	28	33	38	40	44	47	49	51	53	55	56
0	0	0	12	22	27	32	37	39	43	46	48	50	51	53	54