
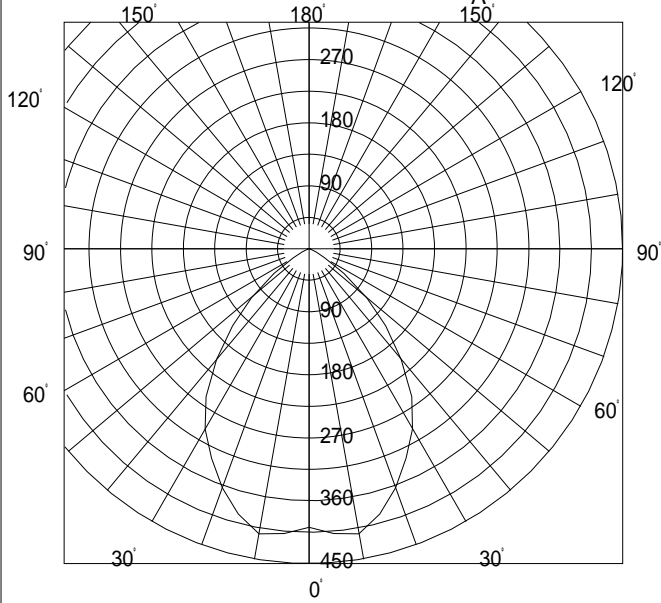


BD23001

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A 1.13H		B-B 1.13H	
器具 効率	上方光束	0.1%			
	下方光束	65.4%			
	計	65.5%			
保守率		良	0.740	中	0.700 否 0.620

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

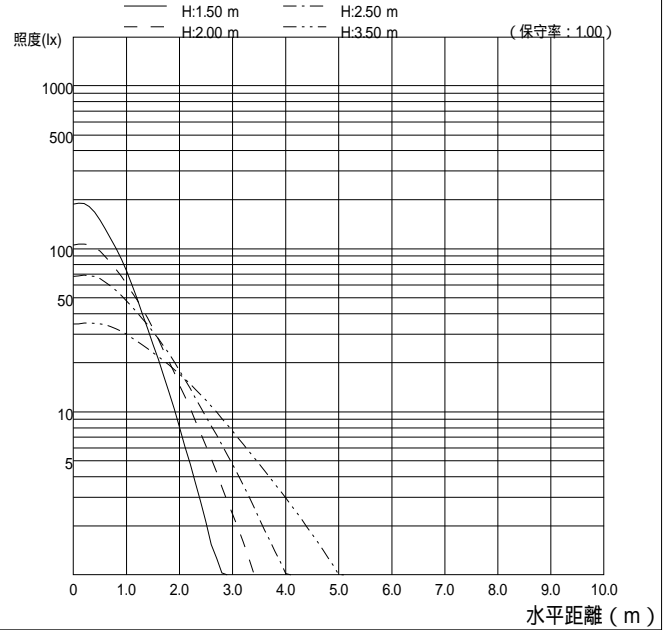

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	36	50	56	61	66	69	73	75	77	79	80	82	83
		10	34	46	50	55	59	60	63	65	66	67	68	69	69
	50	30	28	42	48	54	60	62	67	71	73	76	77	80	81
		10	27	40	45	50	55	57	60	62	64	65	66	68	68
70	30	30	24	37	43	49	55	58	63	67	69	73	75	78	80
		10	23	36	41	46	52	54	57	60	62	64	65	67	68
	10	10	21	33	38	43	49	51	55	59	60	62	64	66	67
	70	30	35	49	54	59	64	67	70	73	74	76	77	79	80
50		10	33	45	50	54	58	60	62	64	65	66	67	68	68
	50	30	28	41	47	53	59	61	66	69	71	73	75	77	78
		10	27	39	44	49	54	56	59	62	63	65	66	67	68
	30	30	24	37	42	48	54	57	62	66	68	71	73	75	77
30		10	23	36	41	46	51	53	57	60	61	63	65	66	67
	50	30	27	40	46	51	57	59	63	66	67	69	71	72	73
		10	26	39	44	48	53	55	58	61	62	63	64	65	66
	10	10	21	33	38	43	49	51	55	58	59	61	62	64	65
0	30	30	23	36	41	46	52	54	58	61	62	64	66	67	68
	10	10	23	35	40	45	50	52	56	58	59	61	62	64	64
0	0	0	20	32	36	42	47	49	53	56	57	59	60	61	62