
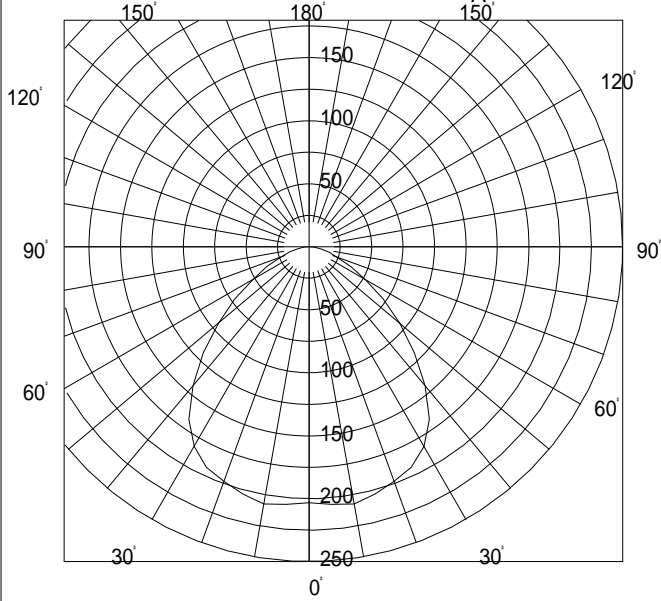


BD23011A

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A 1.31H		B-B 1.31H	
器具 効率	上方光束	0.0%			
	下方光束	48.4%			
	計	48.4%			
保守率		良	0.740	中	0.700 否 0.610

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

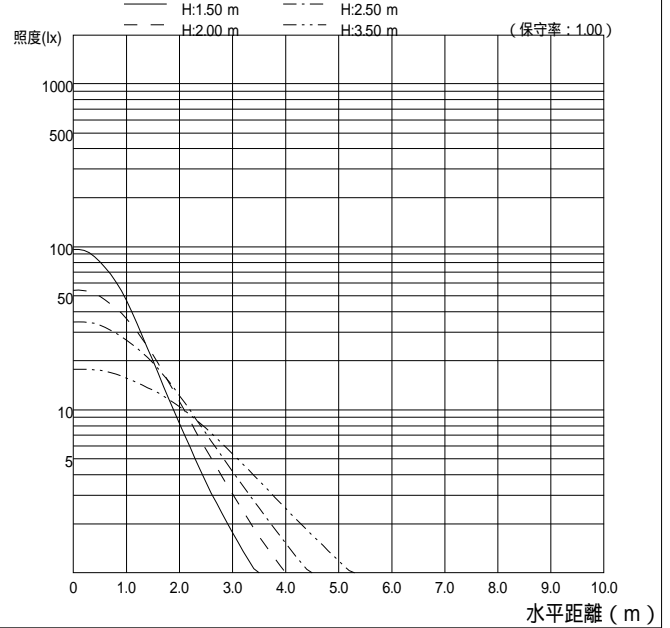

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	24	33	38	42	46	48	51	54	55	57	58	60	61	
		10	22	30	34	37	41	42	45	46	47	48	49	50	51	
	50	30	17	26	31	35	40	43	47	50	52	54	56	58	59	
		10	17	25	29	33	37	39	42	44	45	47	48	49	50	
70	30	30	14	22	27	31	36	39	43	46	49	52	54	56	58	
		10	14	22	26	30	34	36	39	42	43	45	47	48	49	
	50	30	23	32	36	41	44	47	50	52	53	55	56	57	58	
		10	22	30	33	37	40	42	44	46	47	48	49	49	50	
50	50	30	17	26	30	35	39	42	46	48	50	52	54	56	57	
		10	16	25	29	33	36	38	41	43	45	46	47	48	49	
	30	30	14	22	26	31	35	38	42	45	47	50	52	54	56	
		10	13	21	25	29	33	36	39	41	43	45	46	48	49	
30	50	30	17	25	29	34	38	40	43	46	47	49	51	52	53	
		10	16	24	28	32	35	37	40	42	44	45	46	47	48	
	30	30	14	22	26	30	34	37	41	44	45	48	49	51	53	
0	10	10	11	19	23	27	31	33	37	39	41	43	44	46	47	
	30	30	13	21	25	29	34	36	39	42	43	45	47	48	50	
	10	10	13	21	25	29	33	35	38	40	41	43	44	46	47	
	0	0	11	18	22	26	30	32	35	38	39	41	42	44	45	