
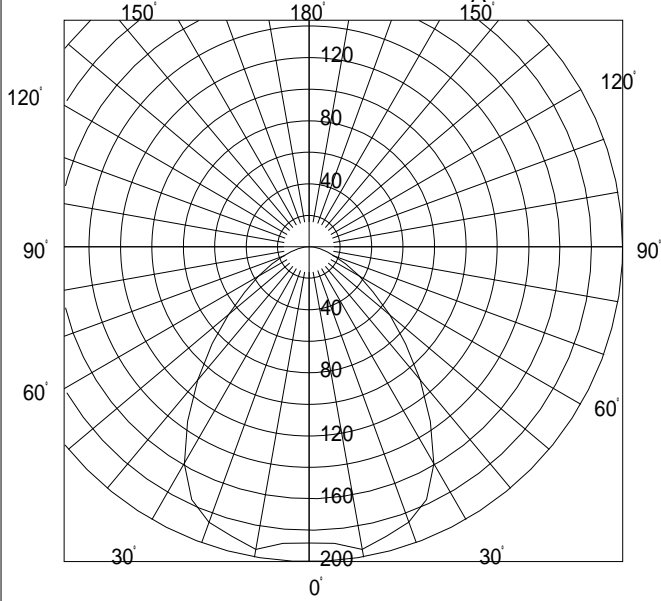


BD23021

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A		B-B	
		1.23H		1.23H	
器具 効率	上方光束	0.0%			
	下方光束	39.3%			
	計	39.3%			
保守率		良	0.740	中	0.700 否 0.620

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

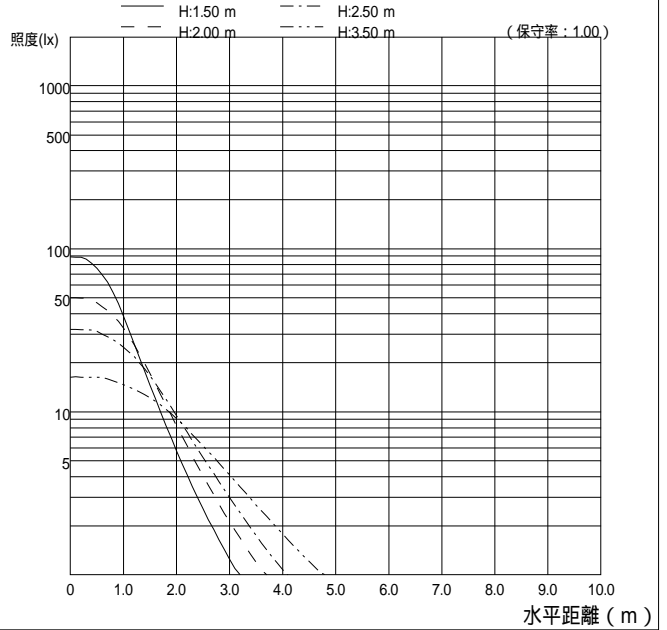

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	20	28	31	35	38	39	42	44	45	46	47	48	49
		10	19	25	28	31	33	35	37	38	38	39	40	41	41
	50	30	15	22	26	30	33	35	38	41	42	44	45	47	48
		10	14	21	24	27	30	32	34	36	37	38	39	40	41
70	30	30	12	19	23	26	30	32	35	38	40	42	44	46	47
		10	12	19	22	25	28	30	32	34	35	37	38	39	40
	10	10	10	17	20	23	26	28	31	33	34	36	37	38	40
	70	30	19	27	30	34	37	38	41	42	43	45	46	47	47
50		10	18	25	28	30	33	34	36	37	38	39	39	40	41
	50	30	15	22	26	29	33	34	37	40	41	43	44	45	46
		10	14	21	24	27	30	32	34	36	36	38	39	39	40
	30	30	12	19	22	26	30	32	35	37	39	41	42	44	46
30		10	12	19	22	25	28	29	32	34	35	37	38	39	40
	10	10	10	17	20	23	26	28	31	33	34	36	37	38	39
	50	30	14	22	25	28	31	33	36	38	39	40	41	43	43
		10	14	21	24	27	30	31	33	35	36	37	38	39	39
0	30	30	12	19	22	25	29	31	34	36	37	39	40	42	43
		10	12	19	21	24	28	29	32	33	35	36	37	38	39
	10	10	10	17	20	23	26	28	30	32	34	35	36	37	38
30	30	12	19	22	25	28	30	32	34	36	37	38	39	40	
	10	12	18	21	24	27	29	31	33	34	35	36	37	38	
10	10	10	17	20	23	26	27	30	32	33	35	36	37	38	
0	0	0	10	16	19	22	25	27	29	31	32	34	35	36	37