


BD23031A


諸特性

光源		FDL18EX-N			
最大取付間隔		A-A 1.20H		B-B 1.20H	
器具 効率	上方光束	0.0%			
	下方光束	31.5%			
	計	31.5%			
保守率		良	0.740	中	0.700 否 0.610

配光曲線図 (cd/1000lm)

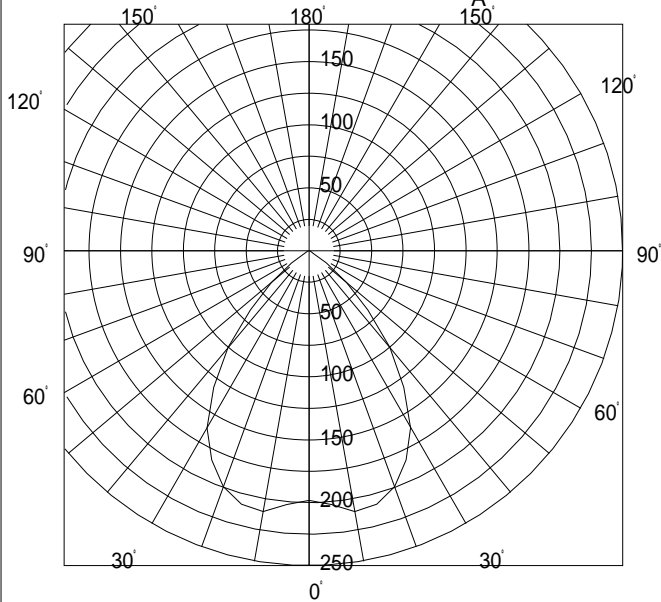

直射水平面照度

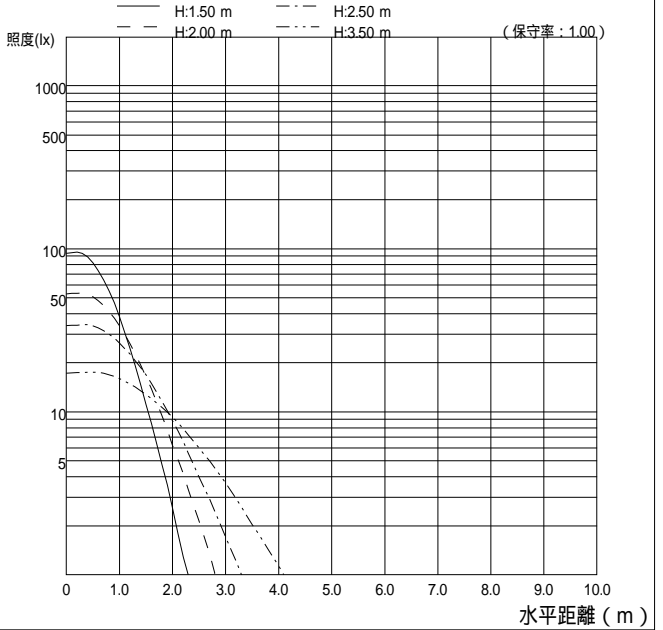

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	18	25	28	30	32	33	35	36	37	38	39	39	40
		10	17	23	25	27	29	29	31	31	32	32	33	33	33
	50	30	15	21	24	27	30	31	33	34	35	37	37	38	39
		10	14	20	22	25	27	28	29	30	31	32	32	33	33
70	30	30	13	19	22	25	27	29	31	33	34	35	36	37	38
		10	12	19	21	23	26	27	28	29	30	31	32	32	33
	70	30	18	25	27	29	32	33	34	35	36	37	37	38	38
		10	17	23	25	27	28	29	30	31	31	32	32	33	33
50	50	30	14	21	24	26	29	30	32	34	34	35	36	37	38
		10	14	20	22	25	27	28	29	30	31	31	32	32	33
	30	30	12	19	21	24	27	28	30	32	33	34	35	36	37
		10	12	19	21	23	26	26	28	29	30	31	31	32	32
30	50	30	14	21	23	26	28	29	31	32	33	34	34	35	35
		10	14	20	22	24	26	27	28	30	30	31	31	32	32
	30	30	12	19	21	24	26	27	29	31	32	33	33	34	35
		10	12	19	21	23	25	26	28	29	29	30	31	31	32
0	30	30	12	19	21	23	26	27	28	30	30	31	32	32	33
	10	10	11	18	19	22	24	25	27	28	29	30	30	31	31
0	0	0	11	17	19	21	24	24	26	27	28	29	29	30	30