
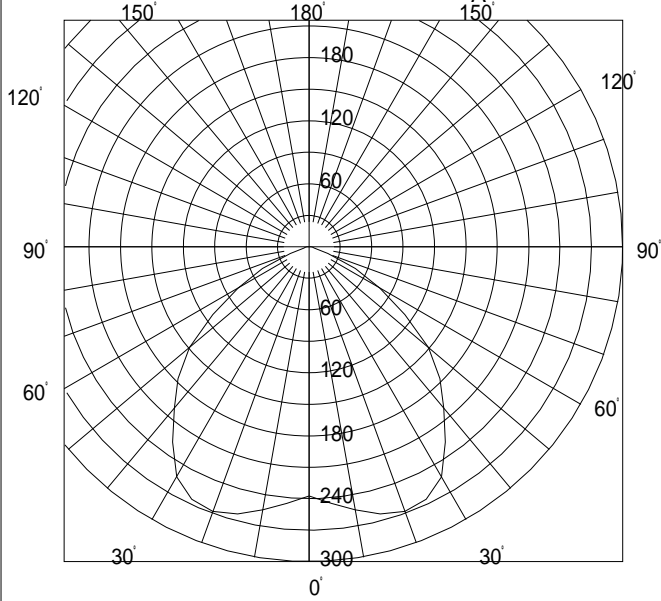


BD23051

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A		B-B	
		1.45H		1.45H	
器具 効率	上方光束	0.1%			
	下方光束	65.8%			
	計	65.8%			
保守率		良	0.740	中	0.700 否 0.620

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

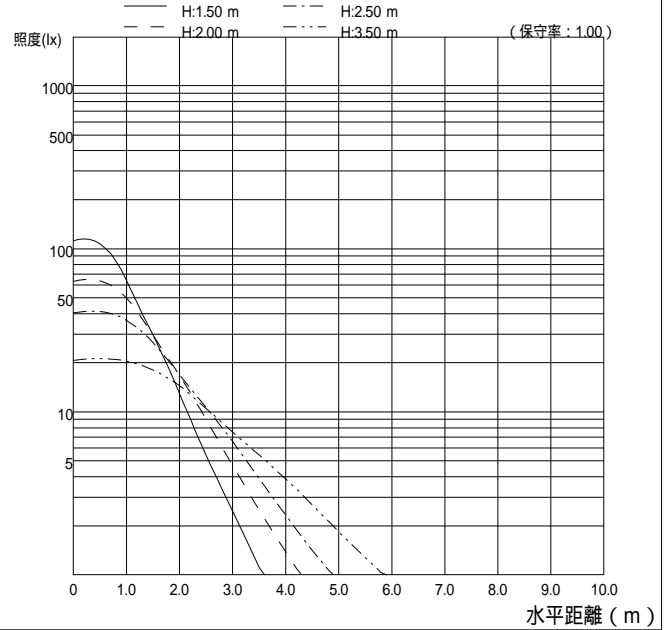

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	32	44	51	57	63	66	70	74	76	78	80	81	83
		10	30	41	46	51	56	58	61	63	65	66	67	68	69
	50	30	23	35	42	48	55	59	64	68	71	74	76	79	81
		10	22	33	39	45	50	53	57	60	62	64	65	67	68
	30	30	18	30	36	43	49	53	59	64	67	71	73	76	79
70		10	18	29	35	41	46	49	54	58	59	62	64	66	67
	10	10	15	26	31	37	43	46	51	55	57	60	62	64	66
	70	30	31	43	50	55	61	64	68	71	73	75	77	78	80
		10	29	40	45	50	55	57	60	63	64	65	66	67	68
	50	30	23	35	41	48	54	57	63	66	69	72	74	76	78
50		10	22	33	39	44	50	52	57	60	61	63	65	66	67
	30	30	18	29	36	42	49	52	58	62	65	69	71	74	76
		10	18	29	35	40	46	49	54	57	59	62	63	65	66
	10	10	15	26	31	37	43	46	51	55	57	60	62	64	66
	50	30	22	34	40	46	52	55	60	63	65	68	69	71	73
30		10	21	32	38	43	49	51	55	58	60	62	63	65	66
	30	30	18	29	35	41	47	51	56	60	62	65	67	70	72
		10	17	28	34	40	45	48	53	56	58	60	62	64	65
	10	10	15	25	31	37	43	46	51	54	56	59	61	63	64
	30	30	18	29	34	40	46	49	54	58	60	62	64	66	68
0		10	17	28	34	39	45	48	52	55	57	59	61	63	64
	0	0	14	24	30	35	41	44	49	52	54	56	58	60	61