


BD23061


諸特性

光源		FDL18EX-N			
最大取付間隔		A-A 1.21H		B-B 1.21H	
器具 効率	上方光束	0.1%			
	下方光束	47.9%			
	計	48.0%			
保守率		良	0.740	中	0.700 否 0.620

配光曲線図 (cd/1000lm)

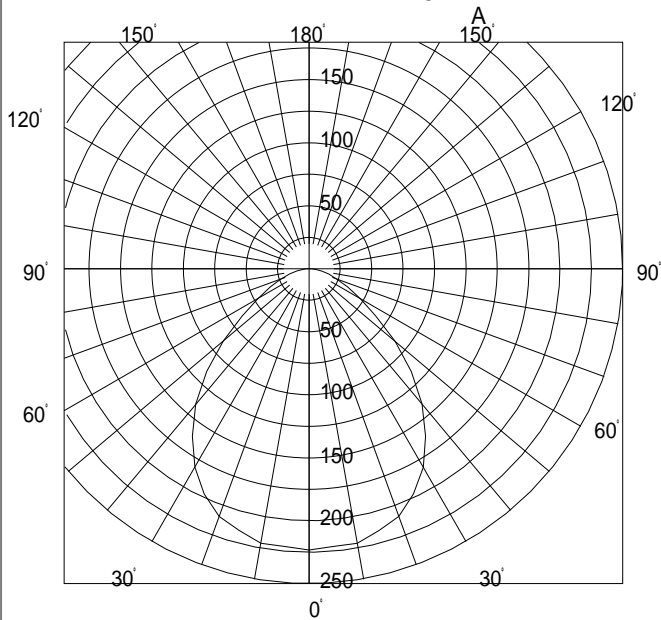

直射水平面照度

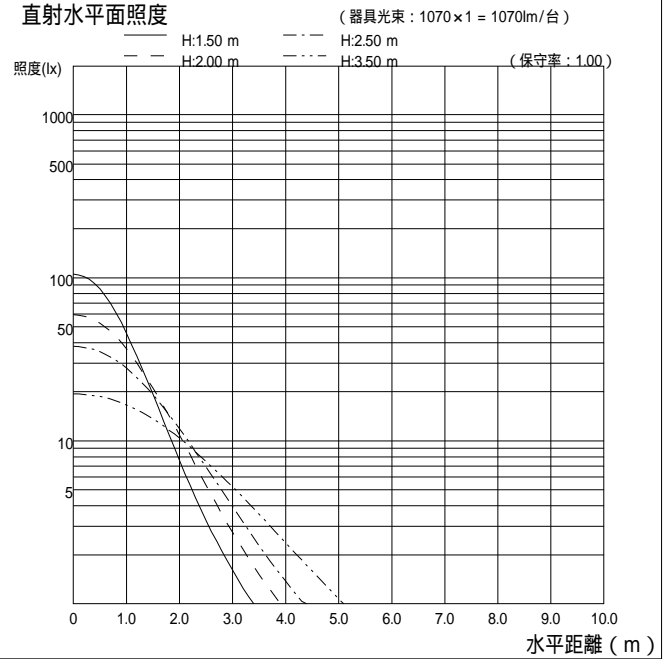

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	24	33	37	42	46	48	51	53	55	56	58	59	60
		10	22	30	34	37	40	42	44	46	47	48	49	50	50
	50	30	18	26	31	35	40	42	46	49	51	54	55	57	59
		10	17	25	29	33	37	38	41	44	45	46	47	49	49
	30	30	14	23	27	31	36	38	43	46	48	51	53	55	57
70		10	14	22	26	30	34	36	39	41	43	45	46	48	49
	70	30	23	32	36	40	44	46	49	52	53	55	56	57	58
		10	22	30	33	37	40	41	44	45	46	47	48	49	50
	50	30	17	26	30	35	39	41	45	48	50	52	53	55	57
		10	17	25	29	33	36	38	41	43	44	46	47	48	49
50	30	30	14	22	27	31	35	38	42	45	47	50	52	54	55
		10	14	22	26	29	33	35	39	41	43	44	46	47	48
	70	30	23	32	36	40	44	46	49	52	53	55	56	57	58
		10	22	30	33	37	40	41	44	45	46	47	48	49	50
	50	30	17	26	30	35	39	41	45	48	50	52	53	55	57
30		10	12	20	23	27	31	33	37	39	41	43	45	46	48
	50	30	17	25	30	34	38	40	43	46	47	49	50	52	53
		10	16	24	28	32	35	37	40	42	43	45	46	47	48
	30	30	14	22	26	30	34	37	40	43	45	47	49	51	52
		10	14	22	25	29	33	35	38	40	42	44	45	46	47
0	30	30	14	22	26	30	34	36	39	41	43	45	46	48	49
		10	14	21	25	29	33	34	37	40	41	43	44	45	46
	0	0	11	19	23	27	31	33	36	39	40	42	43	45	46