
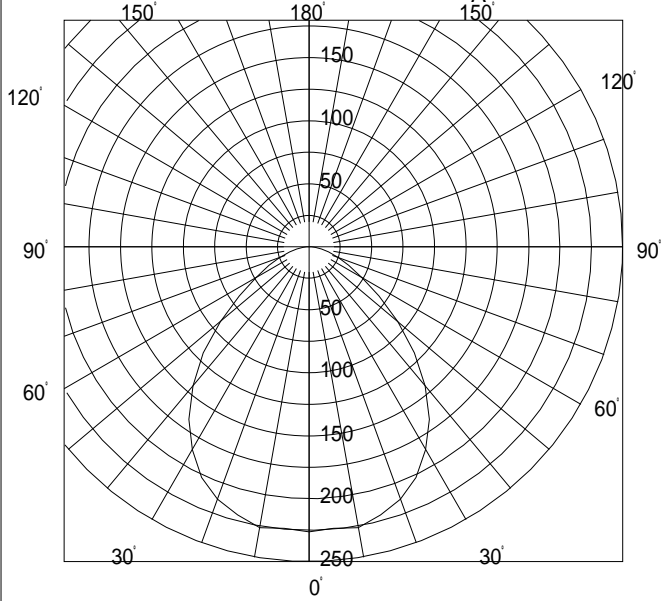


BD23071A

諸特性


光源		FDL18EX-N			
最大取付間隔		A-A 1.22H		B-B 1.22H	
器具 効率	上方光束	0.1%			
	下方光束	49.3%			
	計	49.3%			
保守率		良	0.740	中	0.700 否 0.610

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

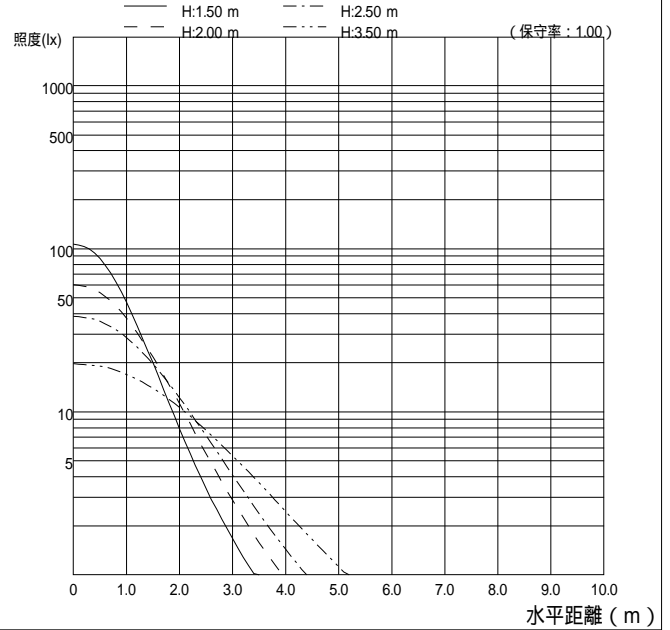

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	24	34	38	43	47	49	52	55	56	58	59	61	62
		10	23	31	35	38	42	43	46	47	48	49	50	51	52
	50	30	18	27	32	36	41	44	48	51	53	55	57	59	60
		10	17	26	30	34	38	39	43	45	46	48	49	50	51
70	30	30	14	23	28	32	37	39	44	47	49	52	55	57	59
		10	14	22	26	30	35	37	40	43	44	46	47	49	50
	70	30	24	33	37	42	45	47	51	53	54	56	57	58	59
		10	22	30	34	38	41	42	45	47	47	49	49	50	51
50	50	30	18	27	31	36	40	43	46	49	51	53	55	57	58
		10	17	26	30	33	37	39	42	44	45	47	48	49	50
	30	30	14	23	27	32	36	39	43	46	48	51	53	55	57
		10	14	22	26	30	34	36	40	42	44	46	47	48	50
30	10	10	12	20	24	28	32	34	38	41	42	44	46	48	49
	50	30	17	26	30	34	39	41	44	47	48	50	52	53	54
		10	17	25	29	33	36	38	41	43	44	46	47	48	49
	30	30	14	23	27	31	35	38	42	44	46	49	50	52	54
0	10	10	12	20	24	28	32	34	37	40	42	44	45	47	48
	30	30	14	22	26	30	34	37	40	43	44	46	48	49	50
0	0	0	11	19	23	27	31	33	36	38	40	42	43	45	46