


BDF23031A


諸特性

光源		FHT16EX-N			
最大取付間隔		A-A 1.17H		B-B 1.17H	
器具 効率	上方光束	0.0%			
	下方光束	36.1%			
	計	36.1%			
保守率		良	0.660	中	0.630 否 0.550

配光曲線図 (cd/1000lm)

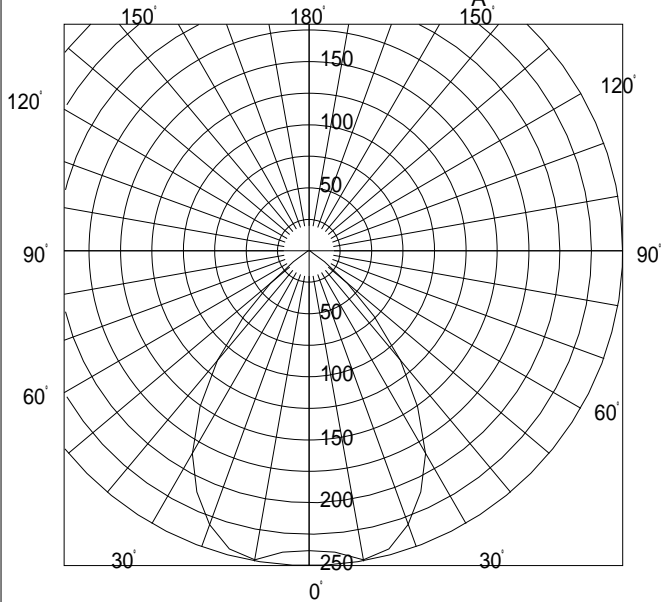

直射水平面照度

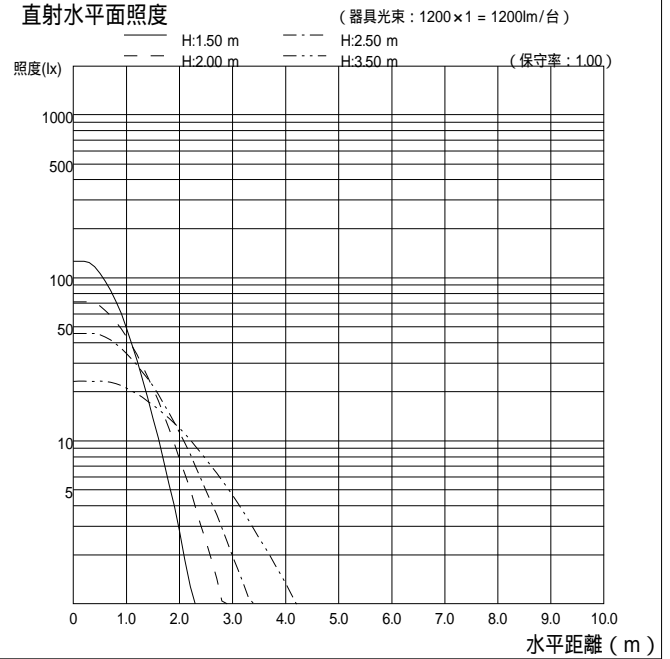

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	21	29	32	35	37	38	40	42	43	44	44	45	46
		10	20	27	29	31	33	34	35	36	36	37	37	38	38
	50	30	17	25	28	31	34	35	38	39	40	42	43	44	45
		10	16	24	26	29	31	32	34	35	36	37	37	38	38
70	30	30	15	23	25	28	32	33	35	38	39	40	42	43	44
		10	14	22	24	27	30	30	32	34	34	35	36	37	37
	10	10	13	21	23	25	28	29	31	33	34	35	36	36	37
		70	30	21	28	31	34	36	37	39	41	41	42	43	43
50		10	20	26	28	31	33	33	35	36	36	37	37	37	38
	50	30	17	25	27	30	33	35	37	38	39	41	42	43	43
		10	16	24	26	28	31	32	33	34	35	36	36	37	37
	30	30	15	22	25	28	31	32	35	37	38	39	40	42	43
30		10	14	22	24	27	29	30	32	34	34	35	36	37	37
	10	10	13	21	23	25	28	29	31	33	33	35	35	36	37
	50	30	17	24	27	29	32	33	35	37	37	38	39	40	41
		10	16	23	25	28	30	31	33	34	34	35	36	36	37
0	30	30	14	22	24	27	30	31	34	35	36	37	38	39	40
		10	14	22	24	26	29	30	32	33	34	35	35	36	36
0	0	0	13	20	22	25	28	29	31	32	33	34	35	36	36
0	0	0	13	20	22	25	28	29	31	32	33	34	35	35	36
0	0	0	13	20	22	25	28	29	31	32	33	34	34	35	35
0	0	0	13	20	22	25	27	28	30	31	32	33	33	34	34