
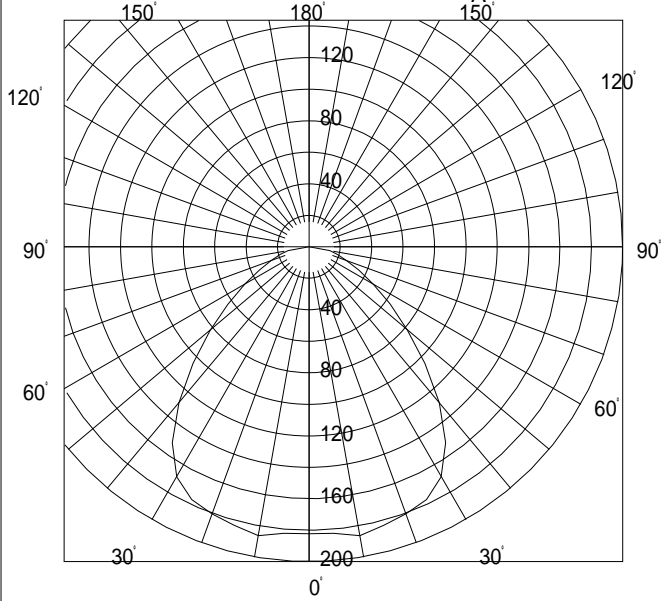


BDH23011

諸特性


光源		FDL18EX-N					
最大取付間隔		A-A 1.33H		B-B 1.33H			
器具 効率	上方光束	0.0%					
	下方光束	44.2%					
	計	44.2%					
保守率		良	0.740	中	0.700	否	0.620

配光曲線図 (cd/1000lm)



直射水平面照度

(器具光束: 1070×1 = 1070lm/台)

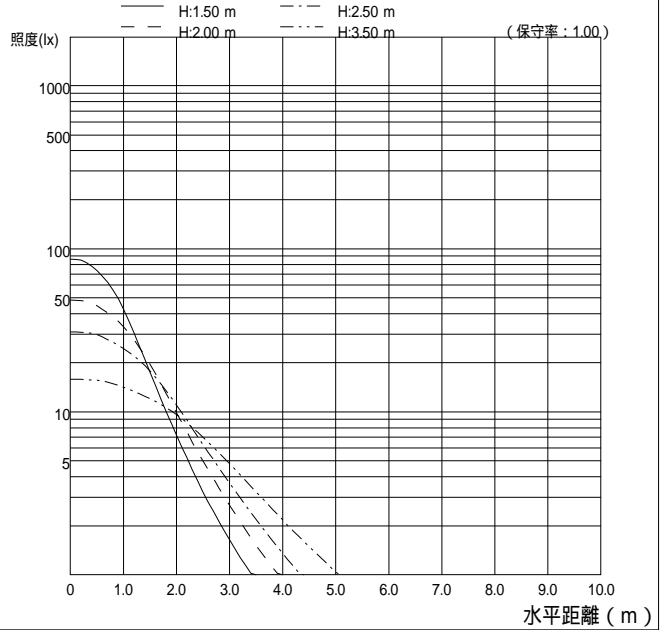

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	22	30	34	38	42	44	47	49	50	52	53	54	55
		10	20	27	31	34	37	38	41	42	43	44	45	46	46
	50	30	16	24	28	32	36	39	42	45	47	49	51	53	54
		10	15	23	26	30	33	35	38	40	41	43	44	45	45
70	30	30	13	20	24	28	33	35	39	42	44	47	49	51	53
		10	12	20	23	27	30	32	36	38	39	41	42	44	45
	10	10	11	18	21	25	28	30	34	36	38	40	41	43	44
		70	30	21	29	33	37	40	42	45	47	48	50	51	52
50		10	20	27	30	33	36	38	40	41	42	43	44	45	46
	50	30	16	24	28	32	36	38	41	44	45	48	49	51	52
		10	15	22	26	29	33	35	37	39	41	42	43	44	45
	30	30	13	20	24	28	32	34	38	41	43	46	47	49	51
30		10	12	20	23	27	30	32	35	38	39	41	42	43	44
	50	30	15	23	27	30	34	36	39	42	43	45	46	48	49
		10	15	22	25	29	32	34	37	38	40	41	42	43	44
	10	10	10	17	21	24	28	30	33	36	37	39	40	42	43
0	30	30	12	20	23	27	30	32	35	38	39	41	43	44	45
		10	12	19	23	26	29	31	34	36	38	39	40	42	43
0	0	0	10	17	21	24	28	30	33	35	37	38	40	41	42
0	0	0	10	17	20	23	27	29	32	34	35	37	39	40	41