



BKF5534

PN




配光曲線図 (cd/1000lm)

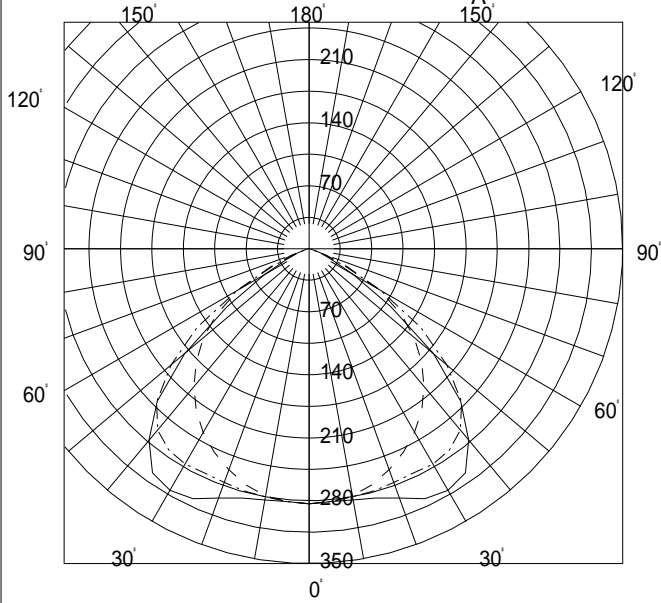

諸特性

光源		FPL45EN/HF			
最大取付間隔		A-A 1.61H		B-B 1.37H	
器具 効率	上方光束	0.0%			
	下方光束	74.2%			
	計	74.2%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

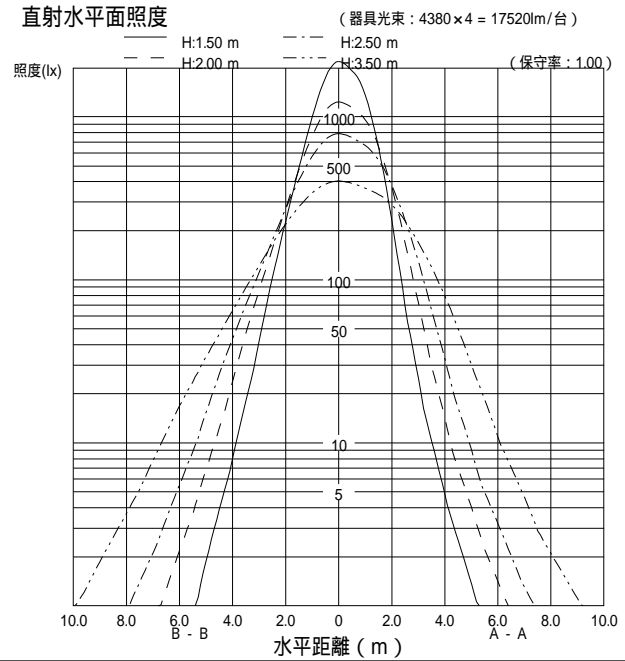

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	35	49	57	64	71	74	80	83	85	88	90	92	93	
		10	33	45	52	58	63	65	69	72	73	75	76	77	78	
	50	30	25	39	47	55	62	66	73	77	80	84	86	89	91	
		10	24	37	44	51	57	60	65	68	70	72	74	75	77	
70	30	30	20	33	41	48	56	60	67	72	76	80	83	86	89	
		10	19	32	39	46	52	56	61	65	67	70	72	74	75	
	10	10	16	28	35	42	49	52	58	63	65	68	70	73	74	
		70	30	34	48	56	62	69	72	77	81	82	85	87	88	90
50		10	32	44	51	57	62	64	68	71	72	74	75	76	77	
	50	30	25	38	46	54	61	65	71	75	78	81	83	86	88	
		10	24	36	44	50	56	59	64	67	69	72	73	75	76	
	30	30	19	32	40	48	55	59	66	71	74	78	80	83	86	
30		10	19	31	39	45	52	55	61	65	67	70	71	73	75	
	10	10	16	28	35	42	49	52	58	62	65	68	70	72	74	
		50	30	24	37	45	52	58	62	68	71	74	77	78	80	82
		10	23	36	43	49	55	58	63	66	68	70	71	73	74	
0	30	30	19	32	39	46	53	57	64	68	70	74	76	79	81	
		10	19	31	38	45	51	55	60	64	66	68	70	72	73	
	10	10	16	28	35	41	48	52	57	61	64	67	69	71	72	
	30	30	19	31	39	45	52	56	61	65	68	70	72	74	76	
	10	10	19	31	38	44	51	54	59	63	65	67	69	70	72	
	0	0	15	26	33	40	46	50	55	59	61	64	66	68	69	