



配光曲線図 (c d / 1000 l m)

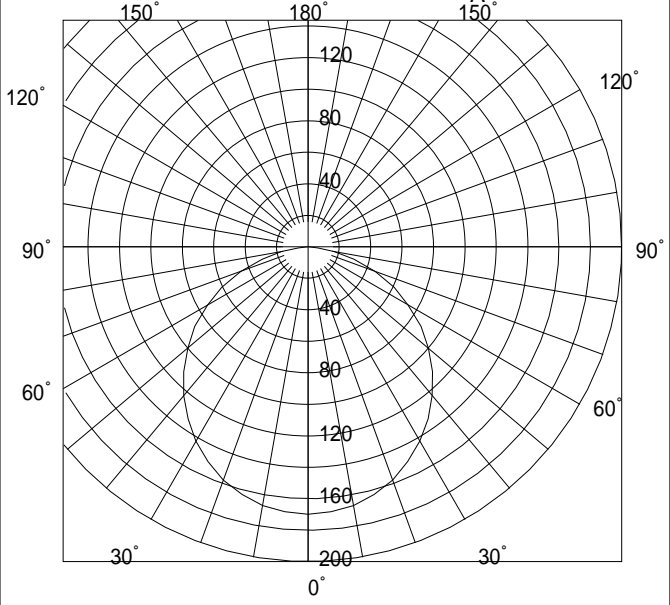

諸特性

光源		FPL45EN/HF					
最大取付間隔	高さ	1.5m	2.0m	2.5m	3.0m		
	A-A	1.93m	2.49m	3.11m	3.72m		
	B-B	1.93m	2.49m	3.11m	3.72m		
器具効率		上方光束	下方光束	計			
		0.0%	47.9%	47.9%			
保守率		良い	0.630	普通	0.590	悪い	0.550

直射水平面照度

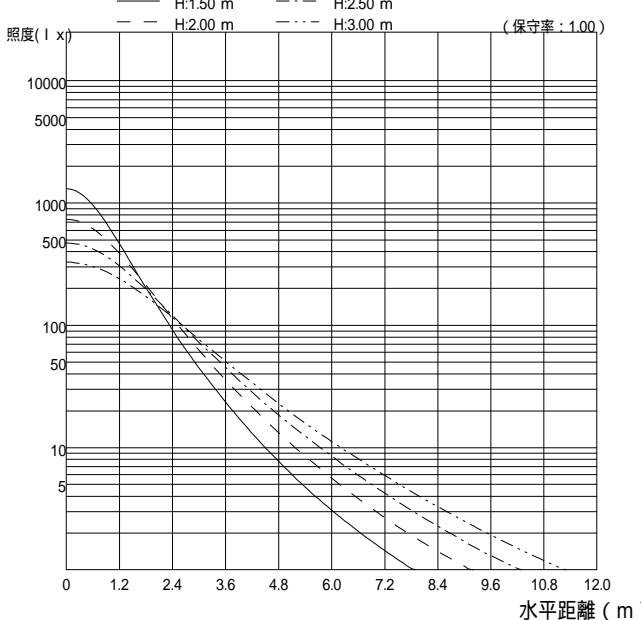

作業面照明率 (× 0 . 0 1)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	22	30	35	39	43	46	50	52	54	56	57	59	60
		10	20	28	32	35	39	40	43	45	46	48	49	50	50
	50	30	15	23	28	32	37	40	44	48	50	53	55	57	59
		10	15	22	26	30	34	36	40	42	44	46	47	48	49
70	30	30	12	19	23	28	32	35	40	44	46	50	52	55	57
		10	12	18	22	26	30	33	37	40	41	44	45	47	49
	10	10	9	16	20	24	28	30	34	37	39	42	44	46	48
		70	30	21	29	34	38	42	44	48	50	52	54	55	57
50		10	20	27	31	35	38	40	42	44	45	47	48	49	50
	50	30	15	23	27	32	36	39	43	46	48	51	53	55	57
		10	15	22	26	30	33	36	39	42	43	45	46	48	49
	30	30	12	19	23	27	32	35	39	43	45	48	51	53	55
30		10	11	18	22	26	30	33	36	39	41	43	45	47	48
	50	30	15	22	26	31	35	37	41	44	46	48	50	52	53
		10	14	21	25	29	33	35	38	41	42	44	45	47	48
	30	30	11	18	23	27	31	34	38	41	43	46	48	50	52
0		10	11	18	22	26	30	32	36	39	40	43	44	46	47
	30	30	11	18	22	26	30	33	37	39	41	44	45	47	49
	10	10	11	18	22	25	29	32	35	38	40	42	43	45	46
	0	0	9	15	18	22	26	28	32	35	37	39	41	43	44