



BKP4513

EDK




配光曲線図 (cd/1000lm)

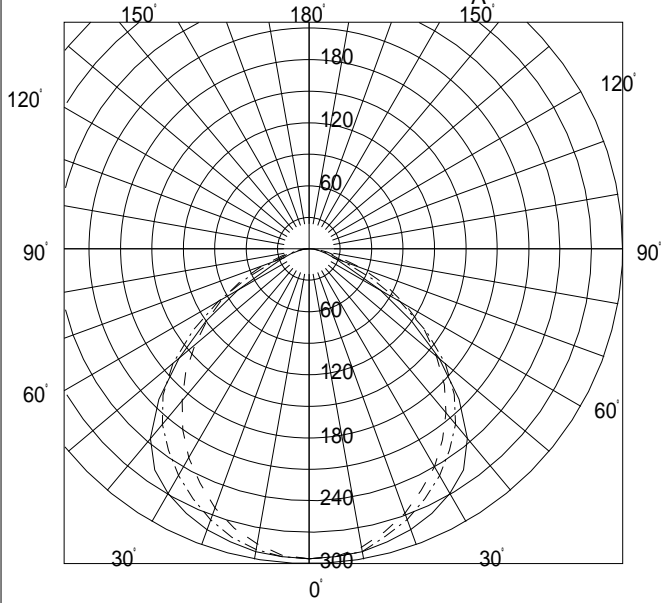

諸特性

光源		FHP32EN・K					
最大取付間隔		A-A		B-B			
		1.37H		1.25H			
器具効率	上方光束	0.0%					
	下方光束	73.5%					
	計	73.5%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

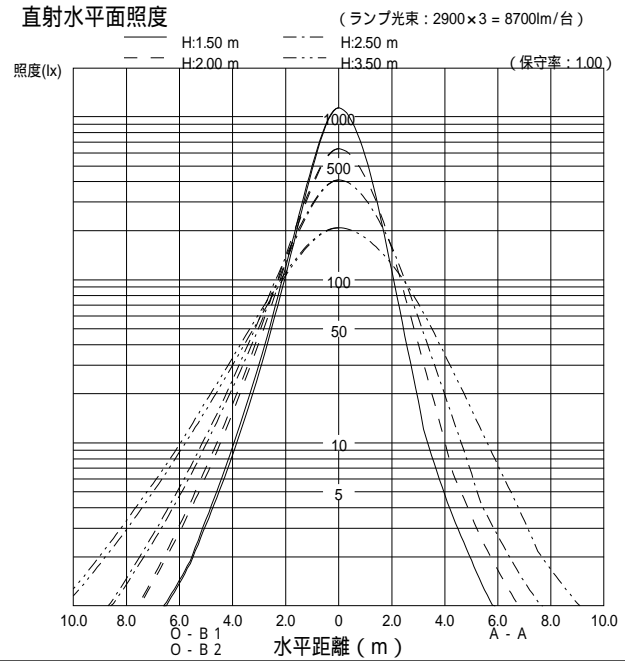

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	34	48	56	62	69	72	78	81	84	86	88	90	92
		10	32	44	51	56	61	64	67	70	72	73	75	76	77
	50	30	25	38	45	52	60	64	70	75	78	82	84	87	90
		10	24	36	43	49	55	58	63	66	68	71	72	74	76
70	30	30	19	31	39	46	53	57	64	70	73	78	81	85	88
		10	19	30	37	43	50	53	59	63	65	68	70	73	75
	70	30	33	47	54	60	66	70	75	79	81	83	85	87	89
		10	31	43	49	55	60	62	66	69	71	72	74	75	76
50	50	30	24	37	45	51	58	62	68	73	76	79	82	85	87
		10	23	35	42	48	54	57	62	65	67	70	72	73	75
	30	30	19	31	38	45	52	56	63	68	71	76	79	82	85
		10	19	30	37	43	49	53	58	62	65	68	70	72	74
30	50	30	24	36	43	50	56	60	65	69	72	75	77	79	81
		10	23	35	41	47	53	56	61	64	66	68	70	72	73
	30	30	19	31	37	44	51	55	61	65	68	72	74	77	80
		10	18	30	36	43	49	52	57	61	64	66	68	71	72
0	30	30	19	30	37	43	50	53	59	63	65	69	71	73	75
	10	10	15	27	33	39	46	49	55	59	61	65	67	69	71
0	0	0	14	25	31	37	44	47	52	56	59	62	64	66	68