



○諸特性

光源		FHP32EN・K			
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m
	A-A	2.02m	2.69m	3.37m	4.03m
	B-B	1.77m	2.37m	2.96m	3.55m
器具効率	上方光束	下方光束		計	
	0.0%	73.5%		73.5%	
保守率	良い 0.730	普通 0.690	悪い 0.610		

○配光曲線図 (cd/1000lm)

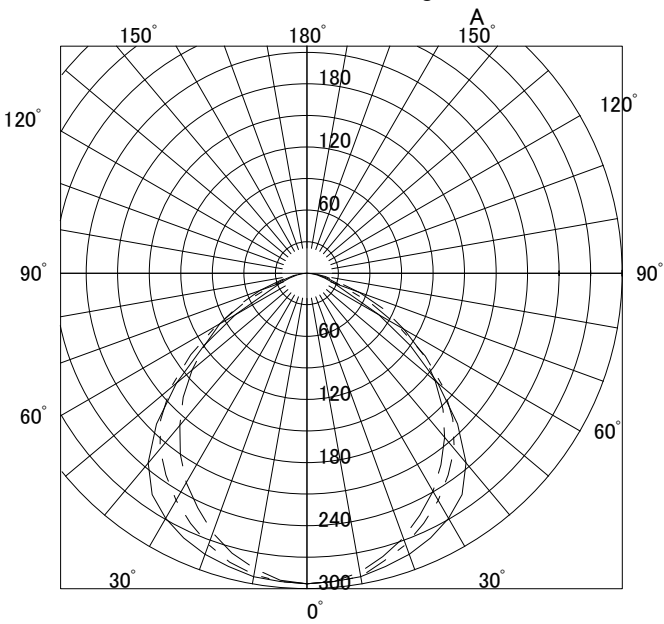

○直射水平面照度

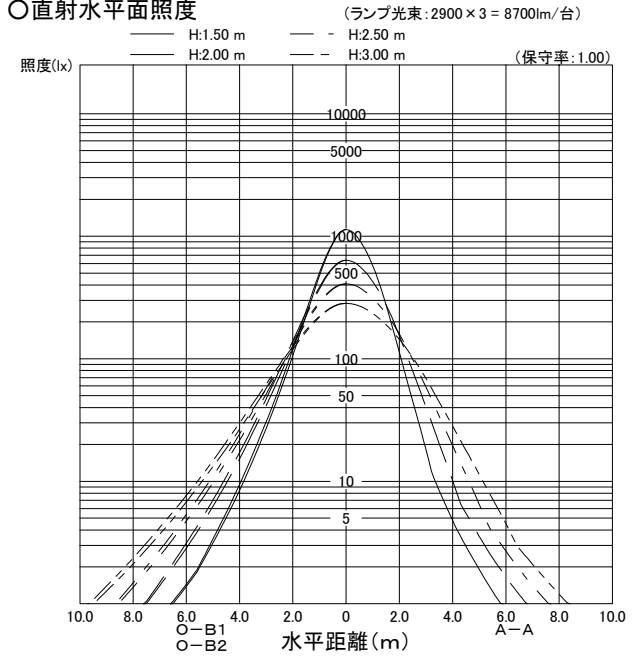

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	35	48	56	63	69	73	78	82	84	87	89	91	93
		10	33	45	51	56	61	64	68	71	72	74	75	76	77
	50	30	25	38	46	53	60	64	71	75	78	82	85	88	90
		10	24	36	43	49	55	58	63	67	69	71	73	75	76
70	70	30	34	47	55	61	67	70	76	79	81	84	86	88	89
		10	32	44	50	55	60	63	67	70	71	73	74	75	76
	50	30	25	38	45	52	59	63	69	73	76	80	82	85	87
		10	24	36	43	49	54	58	63	66	68	70	72	74	75
50	70	30	20	32	39	46	53	57	64	69	72	76	79	83	85
		10	19	31	37	44	50	53	59	63	65	68	70	73	74
	50	30	24	36	44	50	56	60	66	70	72	75	77	80	82
		10	23	35	42	47	53	56	61	64	66	69	71	72	74
30	70	30	19	31	38	45	51	55	61	66	69	72	75	78	80
		10	19	30	37	43	49	53	58	62	64	67	69	71	73
	10	10	16	27	33	40	46	50	55	59	62	65	67	70	72
0	70	30	19	31	37	44	50	54	59	63	66	69	71	74	76
		10	19	30	36	42	49	52	57	61	63	66	68	70	71
	10	10	16	27	33	39	46	49	55	59	61	64	66	69	71
	0	0	15	26	32	38	44	47	53	57	59	62	64	67	69