



BKP4514

EDK




配光曲線図 (cd/1000lm)

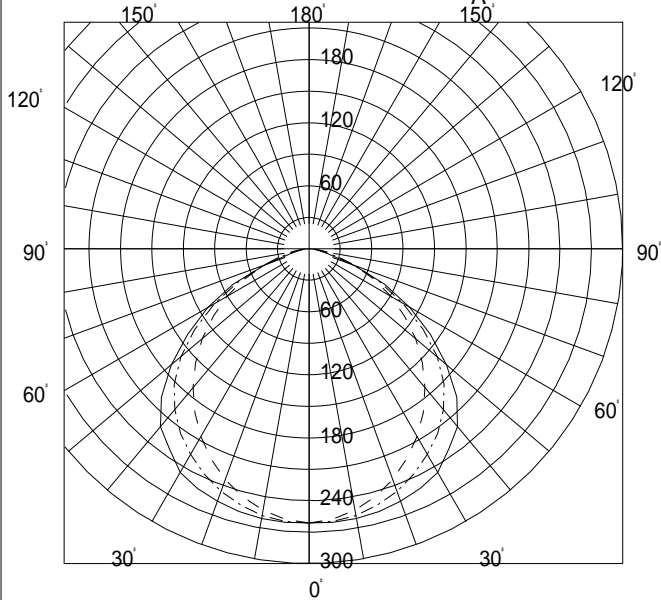

諸特性

光源		FHP32EN・K					
最大取付間隔		A-A 1.42H		B-B 1.25H			
器具 効率	上方光束	0.0%					
	下方光束	70.2%					
	計	70.2%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

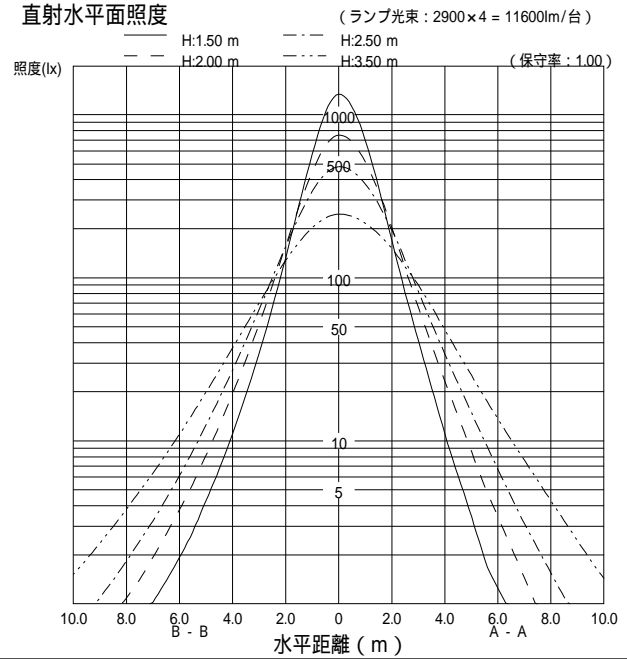

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	32	45	52	58	64	68	73	77	79	82	84	86	88
		10	30	41	47	52	57	60	64	66	68	70	71	72	73
	50	30	23	35	42	49	56	60	66	71	74	78	80	83	86
		10	22	33	39	45	51	54	59	62	65	67	69	71	72
70	30	30	17	29	35	42	49	53	60	66	69	74	77	81	84
		10	17	28	34	40	46	50	55	59	62	65	67	69	71
	70	30	31	43	51	57	62	66	71	74	76	79	81	83	85
		10	29	40	46	51	56	59	63	65	67	69	70	71	73
50	50	30	22	34	41	48	54	58	64	69	72	75	78	81	83
		10	22	33	39	45	50	53	58	62	64	66	68	70	71
	30	30	17	28	35	42	48	53	59	64	67	72	75	78	81
		10	17	28	34	40	46	49	55	59	61	64	66	69	70
30	50	30	22	33	40	46	52	56	61	65	68	71	73	75	77
		10	21	32	38	44	49	52	57	60	62	65	67	68	70
	30	30	17	28	34	41	47	51	57	61	64	68	71	74	76
		10	17	27	33	39	45	48	54	58	60	63	65	67	69
0	30	30	17	27	34	40	46	49	55	59	62	65	67	70	72
	10	10	14	24	30	36	42	45	51	55	57	60	63	65	67
0	0	0	13	23	28	34	40	43	49	53	55	59	61	63	65