



配光曲線図 (cd/1000lm)

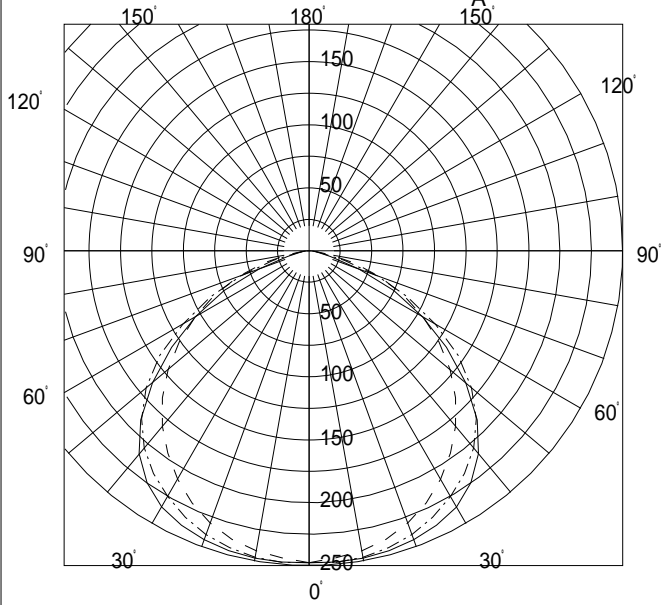

諸特性

光源		FHP32EN・K					
最大取付間隔		A-A 1.42H		B-B 1.31H			
器具 効率	上方光束	0.0%					
	下方光束	71.4%					
	計	71.4%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

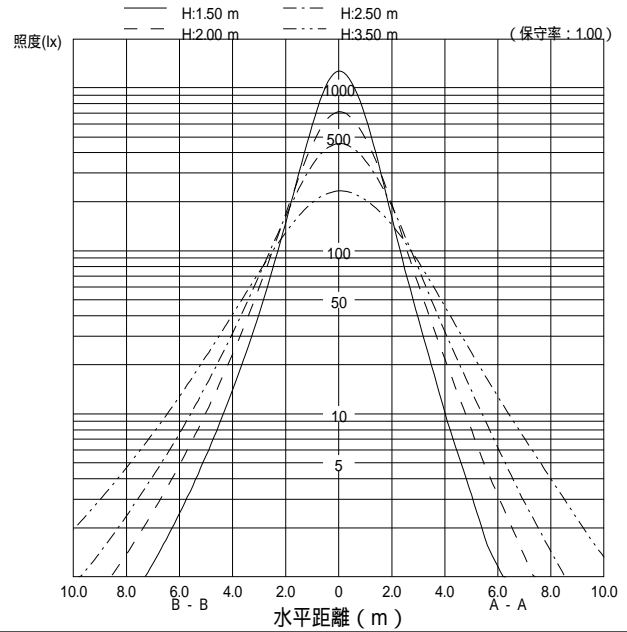

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	32	45	53	59	65	69	74	78	81	84	86	88	89	
		10	30	41	48	53	58	61	65	67	69	71	72	74	75	
	50	30	22	35	42	49	56	60	67	72	75	79	82	85	87	
		10	22	33	39	45	51	55	60	63	65	68	70	72	74	
70	30	30	17	28	35	42	49	54	61	66	70	75	78	82	85	
		10	17	27	34	40	46	50	56	60	62	66	68	71	72	
	70	30	31	44	51	57	63	67	72	75	78	81	82	85	86	
		10	29	40	47	52	57	59	64	66	68	70	71	73	74	
50	50	30	22	34	41	48	55	59	65	70	73	77	79	82	84	
		10	21	32	39	45	51	54	59	63	65	67	69	71	73	
	30	30	17	28	35	42	49	53	60	65	68	73	76	80	82	
		10	17	27	34	40	46	50	55	59	62	65	67	70	72	
30	50	30	22	33	40	46	52	56	62	66	69	72	74	77	79	
		10	21	32	38	44	49	53	58	61	63	66	68	70	71	
	30	30	17	28	34	41	47	51	58	62	65	69	72	75	77	
		10	16	27	33	39	45	49	54	58	61	64	66	68	70	
0	30	30	16	27	33	40	46	50	55	60	62	66	68	71	73	
	10	10	13	23	29	35	42	45	51	55	58	61	64	66	68	
0	0	0	12	22	28	34	40	43	49	53	56	59	62	64	66	