



BKP5543

PN




配光曲線図 (cd/1000lm)

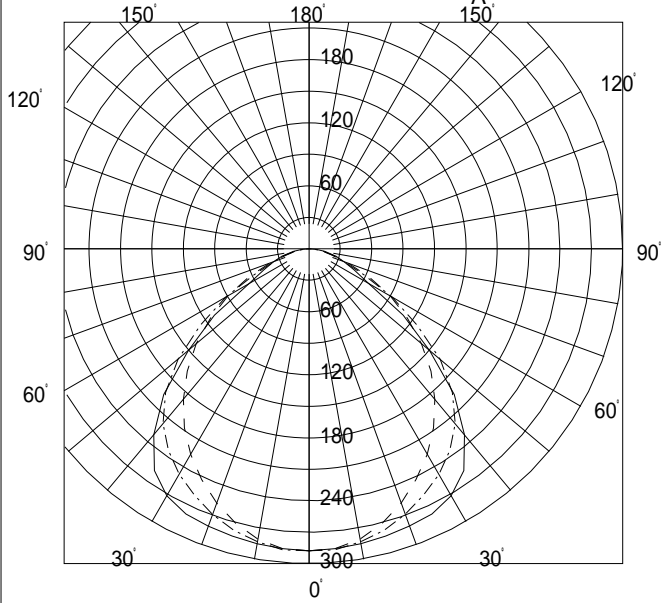

諸特性

光源		FHP45EN			
最大取付間隔		A-A 1.43H		B-B 1.29H	
器具 効率	上方光束	0.0%			
	下方光束	71.2%			
	計	71.2%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

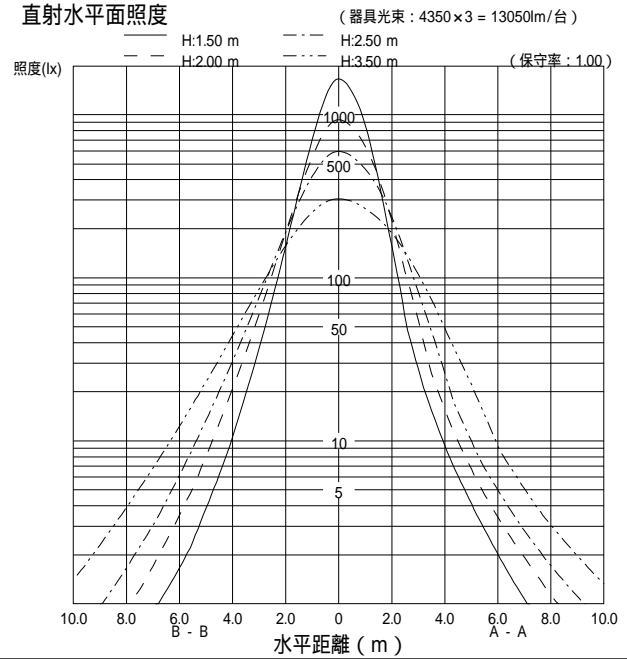

作業面照明率 (× 0.01)

反射率 (%)			室指数													
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0	
80	70	30	34	47	54	61	67	70	75	79	81	84	86	88	89	
		10	31	43	49	54	59	62	65	68	69	71	72	74	74	
	50	30	24	37	44	51	58	62	68	73	75	79	82	85	87	
		10	23	35	42	47	53	56	61	64	66	69	70	72	73	
	30	30	19	31	38	45	52	56	63	68	71	75	78	82	85	
70		10	19	30	36	42	48	52	57	61	63	66	68	70	72	
	10	10	15	26	32	39	45	48	54	58	61	64	66	69	71	
	70	30	33	46	53	59	65	68	73	76	78	81	82	84	86	
		10	31	42	48	53	58	61	64	67	68	70	71	73	74	
	50	30	24	36	43	50	57	61	66	71	73	77	79	82	84	
50		10	23	35	41	47	52	55	60	63	65	68	69	71	72	
	30	30	19	31	37	44	51	55	61	66	69	73	76	80	82	
		10	18	30	36	42	48	51	57	60	63	66	68	70	71	
	10	10	15	26	32	38	45	48	54	58	60	64	66	68	70	
	50	30	23	35	42	48	54	58	63	67	69	72	74	77	79	
30		10	23	34	40	46	51	54	59	62	64	66	68	70	71	
	30	30	19	30	37	43	50	53	59	63	66	70	72	75	77	
		10	18	29	36	42	47	51	56	59	62	64	66	68	70	
	10	10	15	26	32	38	44	48	53	57	60	63	65	67	69	
	30	30	18	30	36	42	48	52	57	61	63	66	68	71	73	
0		10	18	29	35	41	47	50	55	58	61	63	65	67	69	
	0	0	15	26	32	38	44	47	53	56	59	62	64	66	68	
			14	25	31	37	43	46	51	55	57	60	62	64	66	