



BKP5554

PN




配光曲線図 (cd/1000lm)

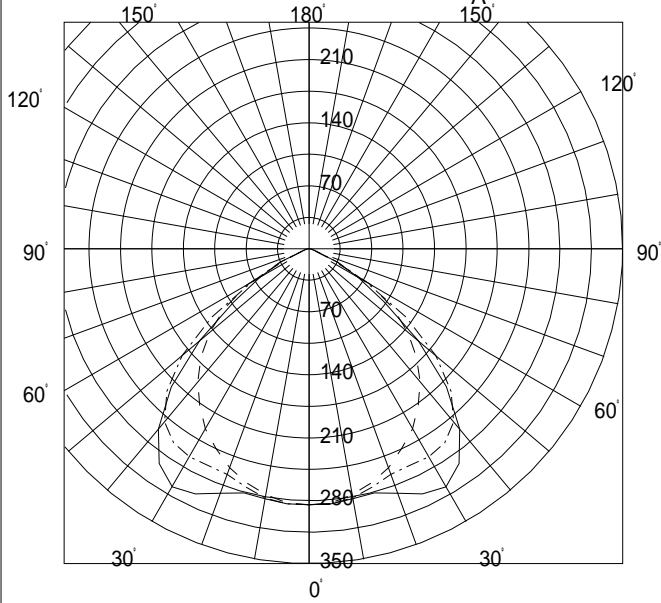

諸特性

光源		FHP45EN			
最大取付間隔		A-A 1.56H		B-B 1.34H	
器具 効率	上方光束	0.0%			
	下方光束	69.9%			
	計	69.9%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

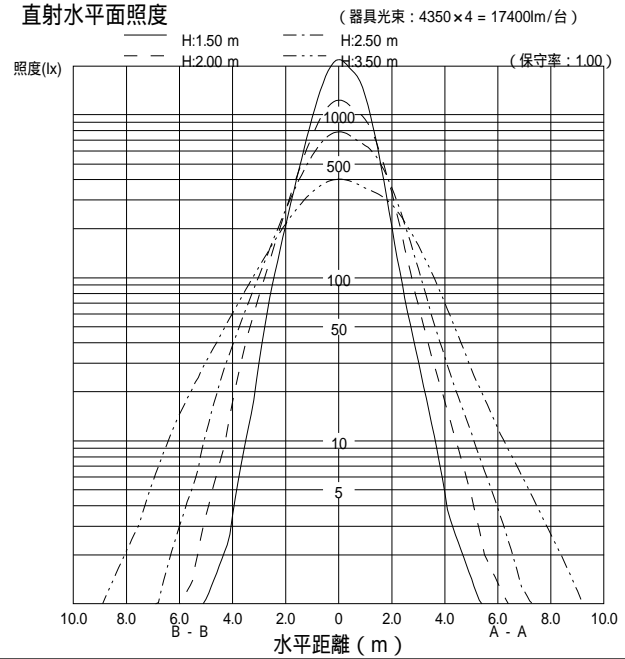

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	33	47	55	61	67	70	75	79	81	83	85	86	88
		10	31	43	50	55	60	62	66	68	69	71	72	73	73
	50	30	24	37	45	52	59	63	69	73	76	79	81	84	86
		10	23	36	42	48	54	57	62	65	66	68	70	71	72
70	30	30	19	32	39	46	53	57	64	69	71	75	78	81	84
		10	19	31	37	44	50	53	58	62	64	66	68	70	71
	10	10	16	27	34	40	47	50	55	59	62	64	66	68	70
	50	70	30	33	46	53	59	65	68	73	76	78	80	82	83
		10	31	42	49	54	59	61	65	67	68	70	71	72	72
50		30	24	37	44	51	58	62	67	71	74	77	79	81	83
		10	23	35	42	48	53	56	61	64	65	68	69	70	71
30	30	30	19	31	39	46	52	56	63	67	70	73	76	79	81
		10	19	31	37	43	50	53	58	61	63	66	67	69	70
	10	10	16	27	34	40	47	50	55	59	61	64	66	68	69
	0	50	30	23	36	43	49	56	59	64	68	70	72	74	76
		10	23	34	41	47	52	55	60	63	64	66	67	69	70
30		30	19	31	38	44	51	55	60	64	67	70	72	74	76
		10	18	30	37	43	49	52	57	60	62	65	66	68	69
30	30	30	19	30	37	44	50	53	58	62	64	67	68	70	72
		10	18	30	36	42	48	51	56	59	61	63	65	66	68
0	10	10	16	27	33	40	46	49	54	58	60	62	64	66	67
	0	0	15	26	32	38	44	48	53	56	58	60	62	64	65