



BKP5564

PN




配光曲線図 (cd/1000lm)

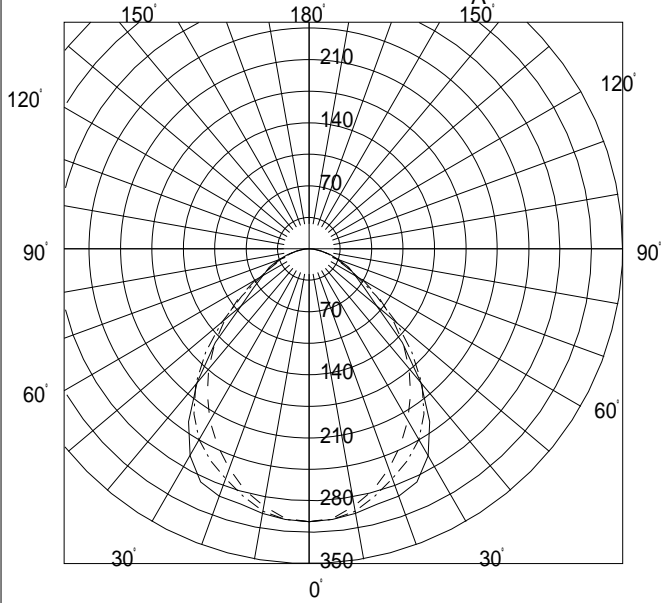

諸特性

光源		FHP45EN			
最大取付間隔		A-A 1.32H		B-B 1.22H	
器具 効率	上方光束	0.0%			
	下方光束	64.3%			
	計	64.3%			
保守率		良	0.740	中	0.700 否 0.620

直射水平面照度

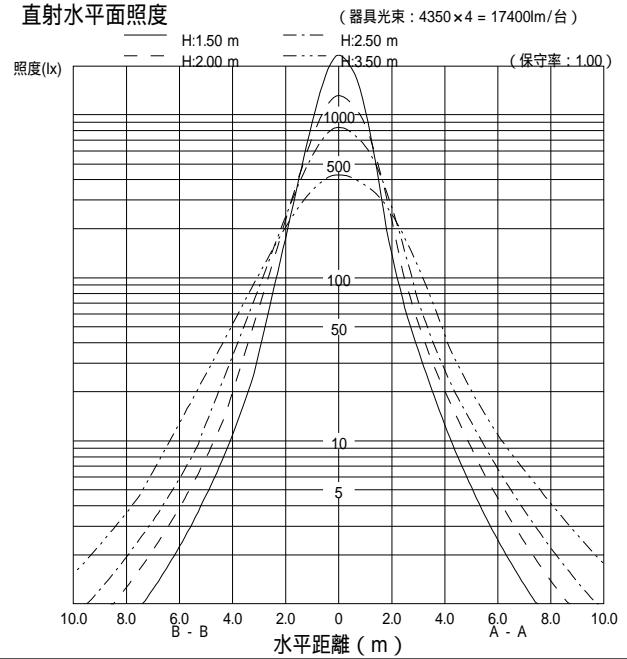

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	32	44	50	56	61	64	69	72	74	76	78	79	81
		10	30	41	46	50	54	56	60	62	63	65	66	67	67
	50	30	24	36	42	48	54	57	62	66	69	72	74	77	79
		10	23	34	39	44	49	52	56	59	60	62	64	65	66
	30	30	19	30	36	42	48	52	57	62	65	69	71	75	77
70		10	19	29	35	40	45	48	52	56	58	60	62	64	66
	10	10	16	26	31	37	42	45	50	53	56	59	61	63	65
	70	30	31	43	49	54	59	62	66	69	71	73	75	76	78
		10	29	40	45	49	53	56	59	61	62	64	65	66	67
	50	30	23	35	41	47	53	56	61	65	67	70	72	74	76
50		10	23	33	39	44	49	51	55	58	60	62	63	65	66
	30	30	19	30	36	42	48	51	56	61	63	67	69	72	75
		10	19	29	34	40	45	48	52	55	57	60	61	63	65
	10	10	16	26	31	37	42	45	50	53	55	58	60	62	64
	50	30	23	34	40	45	51	53	58	61	63	66	68	70	71
30		10	22	33	38	43	48	50	54	57	58	60	62	63	64
	30	30	19	30	35	41	46	49	54	58	60	64	66	68	70
		10	18	29	34	39	44	47	51	54	56	59	60	62	64
	10	10	16	26	31	36	42	44	49	52	54	57	59	61	63
	30	30	18	29	34	40	45	48	52	56	58	61	62	64	66
0	10	10	18	29	34	39	44	46	50	54	55	58	59	61	62
	0	0	15	25	30	35	40	43	47	50	52	55	57	58	60