



BKP5574

PN




配光曲線図 (cd/1000lm)

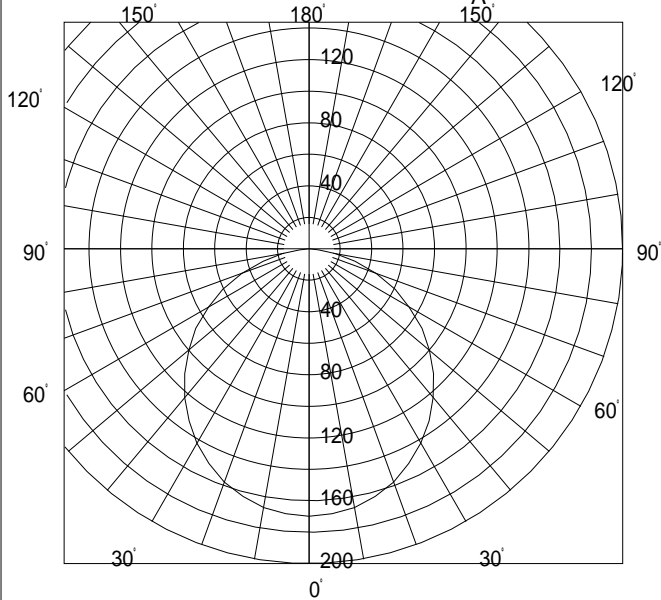

諸特性

光源		FHP45EN			
最大取付間隔		A-A 1.34H		B-B 1.34H	
器具 効率	上方光束	0.0%			
	下方光束	47.9%			
	計	47.9%			
保守率		良	0.700	中	0.660 否 0.620

直射水平面照度

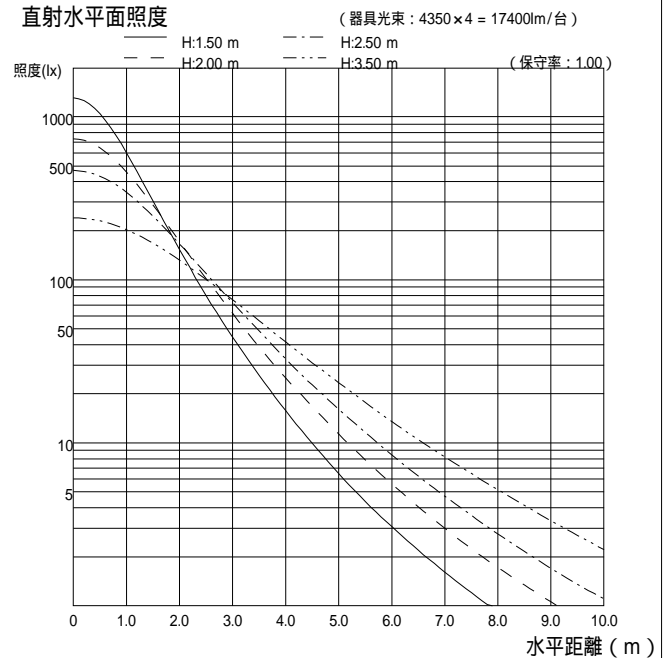

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	21	30	35	39	43	45	49	52	53	55	57	58	60
		10	20	27	31	35	38	40	43	45	46	47	48	49	50
	50	30	15	23	27	32	37	39	44	47	49	52	54	56	58
		10	14	22	26	30	33	36	39	42	43	45	46	48	49
70	30	30	11	18	23	27	32	35	40	43	46	49	52	54	57
		10	11	18	22	26	30	32	36	39	41	43	45	47	48
	10	10	9	15	19	23	27	30	34	37	39	42	43	46	47
	70	30	21	29	34	38	41	44	47	50	51	53	55	56	57
50		10	20	27	31	34	37	39	42	44	45	46	47	48	49
	50	30	15	22	27	31	36	38	43	46	48	51	52	54	56
		10	14	21	25	29	33	35	39	41	43	45	46	47	48
	30	30	11	18	23	27	31	34	39	42	45	48	50	53	55
30		10	11	18	22	26	30	32	36	39	40	43	44	46	48
	10	10	9	15	19	23	27	30	34	37	39	41	43	45	47
	50	30	14	22	26	30	34	37	41	43	45	48	49	51	52
		10	14	21	25	28	32	34	38	40	42	43	45	46	47
0	30	30	11	18	22	26	30	32	36	39	41	43	45	47	48
		10	11	17	21	25	29	31	35	37	39	41	43	44	46
0	0	0	8	14	18	22	26	28	32	35	36	39	40	42	44