



BKP5624

EDK




配光曲線図 (cd/1000lm)

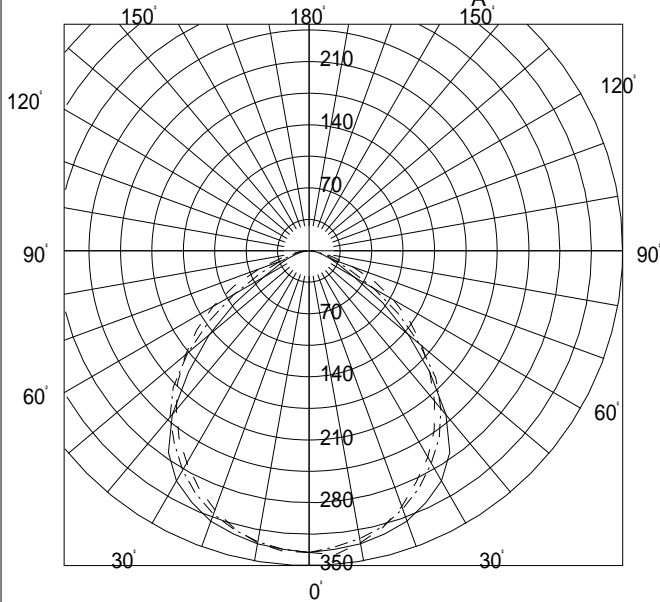

諸特性

光源		FHP45EN・K					
最大取付間隔		A-A 1.36H		B-B 1.30H			
器具 効率	上方光束	0.0%					
	下方光束	77.8%					
	計	77.8%					
保守率		良い	0.730	普通	0.690	悪い	0.610

直射水平面照度

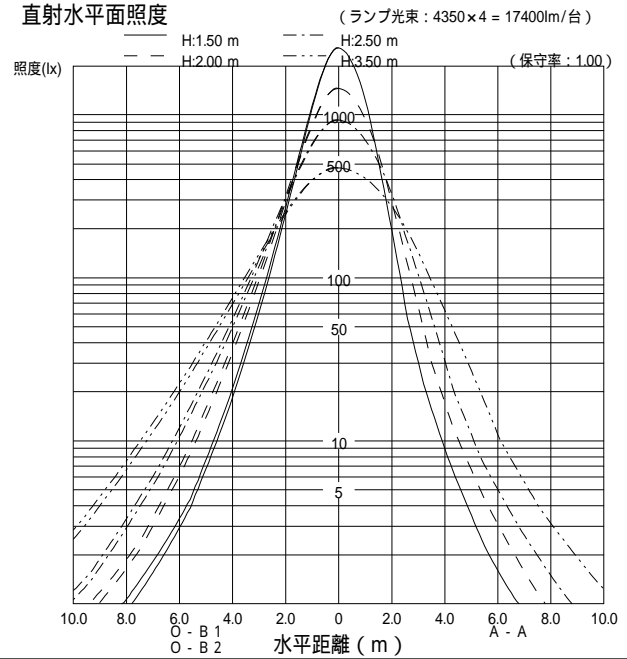

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	37	52	60	67	73	77	83	87	89	92	94	96	98
		10	35	48	54	60	65	68	72	75	76	78	79	81	82
	50	30	27	41	49	57	64	68	75	80	83	87	90	93	95
		10	26	39	46	53	59	62	67	71	73	75	77	79	80
70	30	30	22	35	42	50	57	62	69	75	78	83	86	90	93
		10	21	34	41	47	54	57	63	67	70	73	75	77	79
	10	10	18	30	37	43	50	54	60	64	67	71	73	76	78
		70	30	36	51	58	65	71	75	80	84	86	89	90	92
50		10	34	47	53	59	64	67	71	73	75	77	78	80	81
	50	30	27	41	48	56	63	67	73	78	81	84	87	90	92
		10	26	39	46	52	58	61	66	70	72	74	76	78	79
	30	30	21	35	42	49	57	61	68	73	76	81	84	87	90
30		10	21	34	40	47	54	57	63	67	69	72	74	77	78
	50	30	26	40	47	54	60	64	70	74	76	80	82	84	86
		10	25	38	45	51	57	60	65	68	70	73	74	76	78
	30	30	21	34	41	48	55	59	65	70	73	77	79	82	85
0		10	18	30	36	43	50	53	59	63	66	69	71	74	76
	30	30	21	34	40	47	54	57	63	67	70	73	75	78	80
	10	18	30	36	43	49	53	58	62	65	68	70	73	75	
0	0	0	16	28	35	41	48	51	56	61	63	66	68	71	72