



	EL-C10041N
	EL-X0092
	AHTN




○配光曲線図 (cd/1000lm)

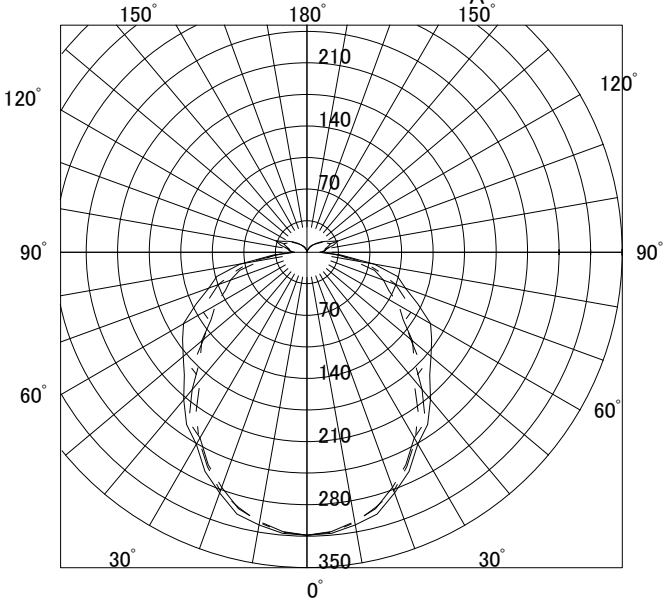

○諸特性

光源		LED9400lm N(定格モード)				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	4.70m	7.04m	9.32m	11.67m	
	B-B	4.58m	6.85m	9.09m	11.38m	
器具効率	上方光束	11.1%		計	100.0%	
	下方光束	88.8%				
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

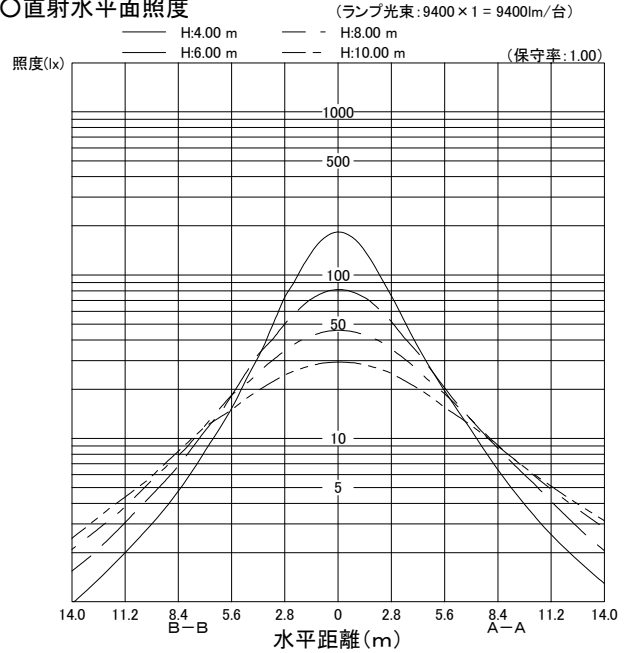

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	60	70	78	86	91	99	104	107	112	115	119	122
		10	42	56	63	70	76	80	86	90	92	95	97	100	102
	50	30	31	46	55	63	72	78	87	94	98	105	109	114	118
		10	30	44	52	59	66	71	78	83	86	91	93	97	100
70	30	30	24	37	45	54	62	68	78	85	91	98	103	109	115
		10	23	36	43	51	59	63	71	77	81	86	90	94	97
	10	70	19	31	38	45	53	57	66	72	76	82	86	91	95
		30	19	31	38	45	53	57	66	72	76	82	86	91	95
50	30	30	29	42	50	57	65	70	77	83	87	92	95	99	103
		10	28	41	48	54	61	65	72	77	80	84	87	90	93
	10	30	22	35	42	50	58	62	71	77	81	87	91	96	100
		10	22	34	41	48	55	60	67	72	76	81	84	88	91
30	30	18	30	36	43	50	55	62	68	72	78	81	86	90	
	10	18	30	36	43	50	55	62	68	72	78	81	86	90	
0	30	30	21	34	40	47	55	59	66	72	76	81	85	89	92
	10	10	21	33	39	46	53	57	64	69	73	77	80	84	87
0	0	0	15	26	32	38	45	49	56	61	64	69	73	77	80