



○諸特性

光源		LED17300lm N				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	4.74m	7.09m	9.46m	11.65m	
	B-B	4.73m	7.08m	9.44m	11.64m	
器具効率	上方光束	下方光束		計		
	0.3%	99.7%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○配光曲線図 (cd/1000lm)

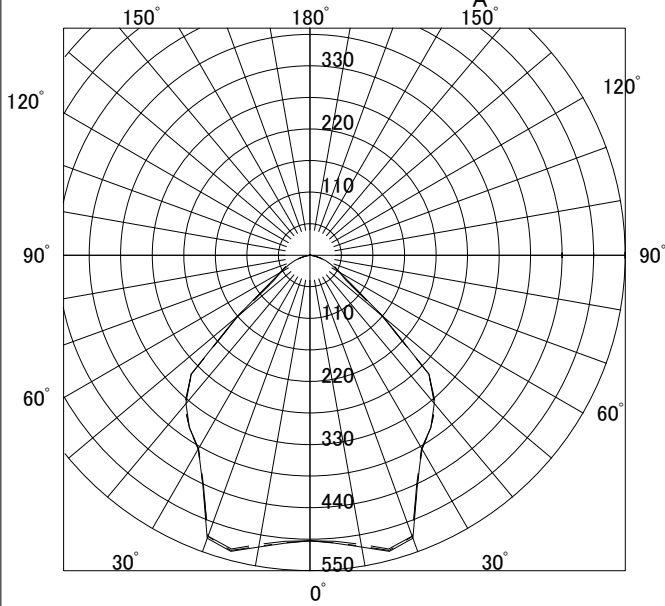

○直射水平面照度

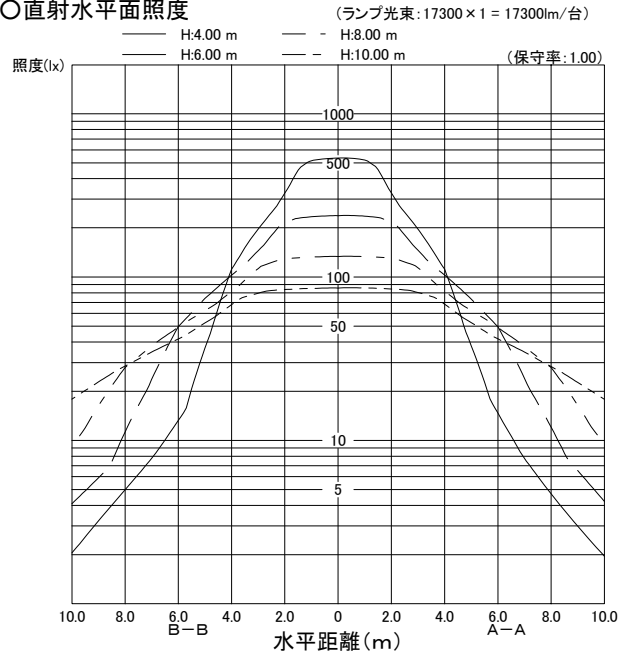

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	53	73	82	91	99	103	110	114	117	120	122	125	127
		10	50	67	75	82	88	91	95	98	100	102	104	105	106
	50	30	41	60	70	79	88	93	101	107	110	115	118	121	124
		10	39	57	65	73	81	84	90	94	96	99	101	103	105
70	70	30	52	71	80	89	96	100	106	110	113	116	118	120	122
		10	49	66	74	80	87	90	94	97	99	101	102	104	105
	50	30	40	60	69	78	87	91	98	104	107	111	114	117	120
		10	39	57	65	73	80	84	89	93	95	98	100	102	104
50	70	30	34	52	61	70	79	84	92	98	102	107	110	115	118
		10	33	51	59	67	75	79	85	90	92	96	98	101	102
	50	30	39	58	67	75	83	87	94	99	101	105	107	110	112
		10	38	56	64	71	79	82	87	91	93	96	98	100	101
30	70	30	33	52	60	69	77	82	89	94	97	102	105	108	111
		10	33	51	58	66	74	78	84	88	91	94	96	99	100
	50	30	29	47	54	62	71	74	81	86	88	92	95	97	99
		10	29	47	54	62	71	74	81	86	88	92	95	97	99
0	70	30	33	51	59	67	75	79	86	91	93	97	99	102	104
		10	32	50	57	65	73	77	83	87	89	92	94	97	98
	50	30	29	46	54	62	70	74	80	85	87	91	93	96	98
		10	29	46	54	62	70	74	80	85	87	91	93	96	98
0	0	30	27	45	52	60	68	72	78	83	85	88	91	93	95
		10	27	45	52	60	68	72	78	83	85	88	91	93	95