



	EL-C15041N
	EL-X0092
	AHTN




○配光曲線図 (cd/1000lm)

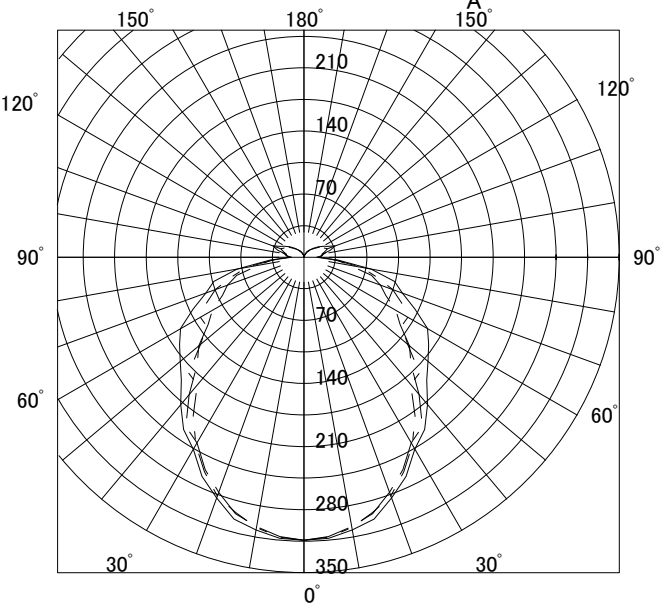

○諸特性

光源		LED13700lm N(定格モード)				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	4.70m	7.04m	9.32m	11.67m	
	B-B	4.58m	6.85m	9.09m	11.38m	
器具効率	上方光束	下方光束		計		
	11.1%	88.8%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

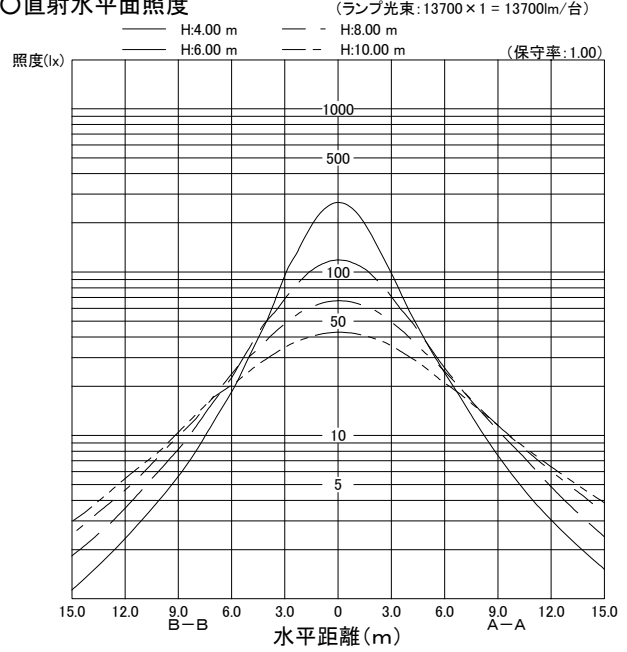

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	60	70	78	86	91	99	104	107	112	115	119	122
		10	42	56	63	70	76	80	86	90	92	95	97	100	102
	50	30	31	46	55	63	72	78	87	94	98	105	109	114	118
		10	30	44	52	59	66	71	78	83	86	91	93	97	100
70	70	30	43	58	67	74	82	87	94	99	102	107	110	113	116
		10	40	54	61	68	74	78	83	87	89	93	95	97	99
	50	30	30	45	53	61	70	75	84	90	94	100	104	109	112
		10	29	43	50	57	65	69	76	81	84	88	91	95	97
50	70	30	23	36	44	52	61	66	75	82	87	94	99	105	109
		10	23	35	43	50	57	62	70	75	79	84	88	92	95
	50	30	29	42	50	57	65	70	77	83	87	92	95	99	103
		10	28	41	48	54	61	65	72	77	80	84	87	90	93
30	70	30	22	35	42	50	58	62	71	77	81	87	91	96	100
		10	22	34	41	48	55	60	67	72	76	81	84	88	91
	50	18	30	36	43	50	55	62	68	72	78	81	86	90	
0	70	30	21	34	40	47	55	59	66	72	76	81	85	89	92
		10	21	33	39	46	53	57	64	69	73	77	80	84	87
0	50	30	17	29	35	42	49	53	60	66	69	75	78	82	86
		10	17	29	35	42	49	53	60	66	69	75	78	82	86
0	30	30	15	26	32	38	45	49	56	61	64	69	73	77	80
		10	15	26	32	38	45	49	56	61	64	69	73	77	80