



EL-C15041N

AHTN




○配光曲線図 (cd/1000lm)

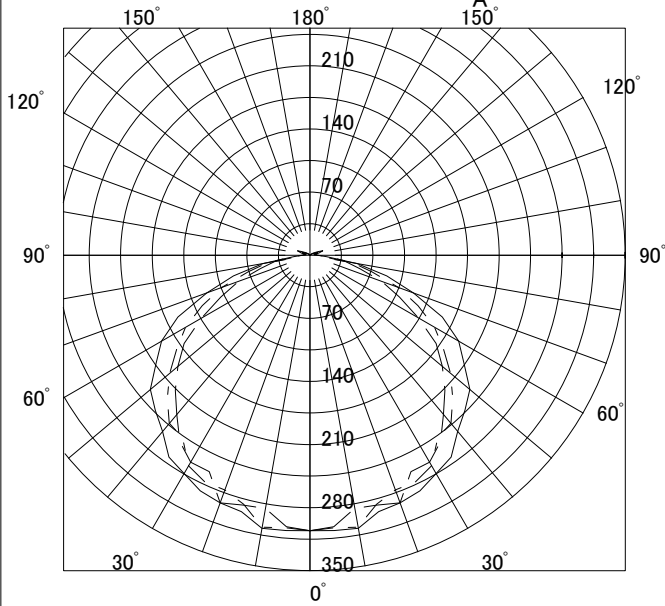

○諸特性

光源		LED16000lm N(定格モード)				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	5.51m	8.10m	10.92m	13.15m	
	B-B	5.11m	7.69m	9.96m	12.50m	
器具効率	上方光束	下方光束		計		
	2.5%	97.5%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

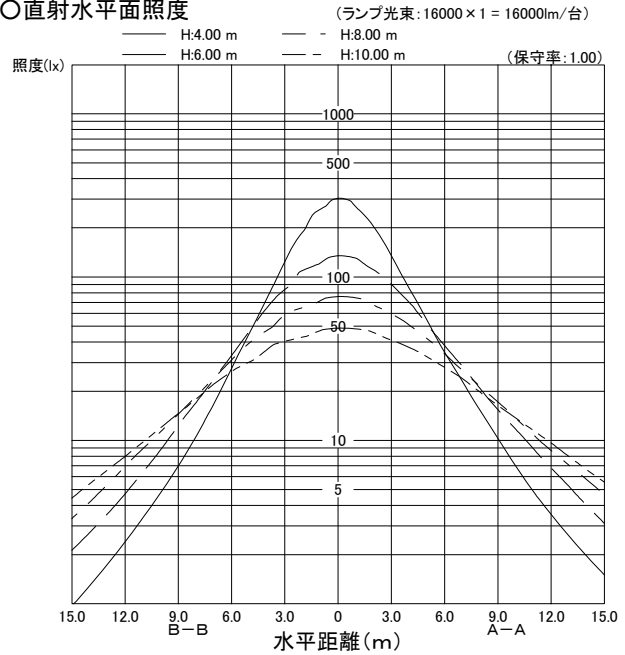

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	44	61	71	80	88	94	101	107	110	115	118	122	124
		10	41	56	64	72	78	82	88	92	95	98	100	102	104
	50	30	30	46	56	65	74	80	90	97	102	108	112	117	121
		10	29	43	52	60	68	73	81	86	89	93	96	100	102
70	70	30	43	59	68	77	85	90	98	103	106	111	114	117	119
		10	40	54	63	70	76	80	86	90	93	96	98	101	102
	50	30	30	45	55	63	72	78	87	94	98	104	108	113	116
		10	29	43	51	59	67	72	79	84	88	92	95	98	101
50	30	30	22	36	45	54	63	69	79	87	92	99	103	109	114
		10	22	35	44	52	60	65	73	79	83	88	92	96	99
	10	10	18	30	38	46	54	59	68	75	79	85	89	93	97
30	30	30	29	43	52	60	69	74	83	88	92	98	101	105	108
		10	28	41	50	57	65	70	77	82	85	89	92	95	98
	10	10	17	30	38	45	54	59	67	73	77	83	87	91	95
0	0	30	21	35	43	51	59	64	73	79	83	88	92	96	99
		10	21	34	42	50	57	62	70	76	79	84	87	91	94
0	0	0	16	27	35	42	50	55	63	69	73	78	82	86	89