



EL-C20030N

EL-X0093

AHJ



○配光曲線図 (cd/1000lm)

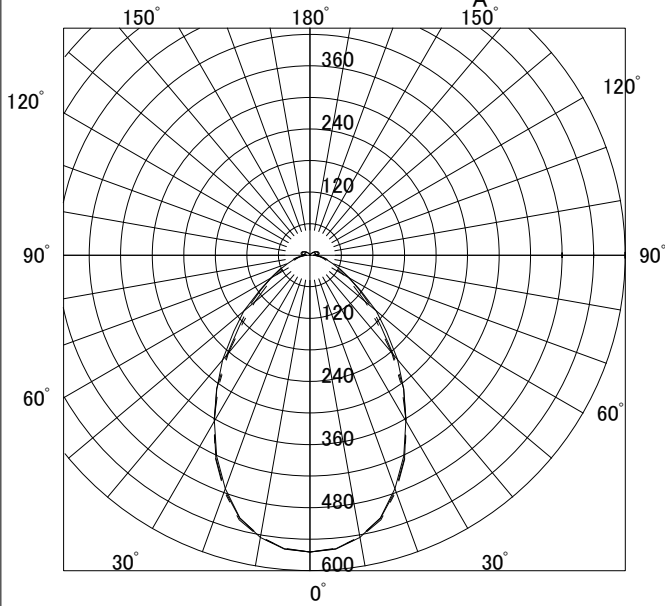


○諸特性

光源		LED20500lm N				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	4.05m	6.05m	8.06m	9.94m	
	B-B	4.07m	6.08m	8.10m	9.98m	
器具効率	上方光束	下方光束		計		
	6.2%	93.8%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

(ランプ光束: 20500 × 1 = 20500lm/台)

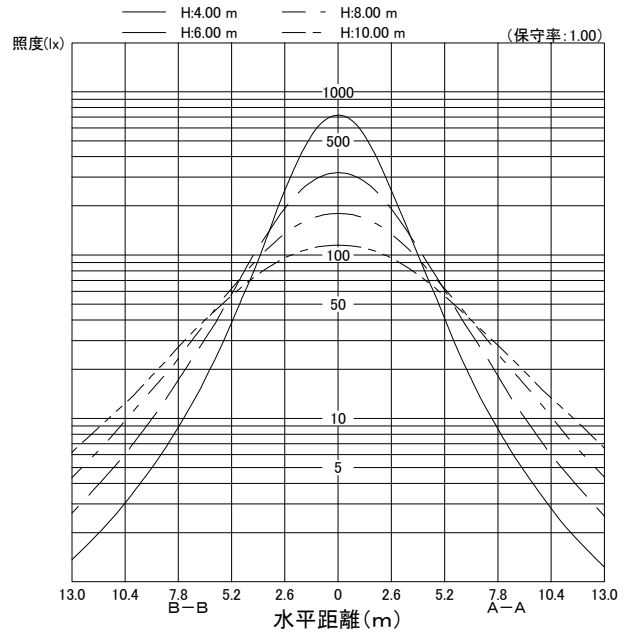

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	52	71	80	88	96	100	107	111	114	118	120	123	125
		10	49	65	73	79	85	88	93	96	98	100	102	103	104
	50	30	40	58	67	76	85	89	97	103	107	112	115	119	122
		10	38	56	63	70	78	81	87	91	93	97	99	101	103
70	70	30	51	69	77	85	93	96	103	107	109	113	115	118	120
		10	48	64	71	77	83	86	91	94	96	98	100	101	103
	50	30	39	57	66	74	83	87	94	100	103	108	111	114	117
		10	38	55	62	69	76	80	85	90	92	95	97	99	101
50	70	30	33	50	58	66	75	80	88	94	98	103	107	111	115
		10	32	49	56	63	71	75	81	86	88	92	95	98	100
	50	30	38	55	63	71	79	82	89	94	97	100	103	106	108
		10	37	53	60	67	74	77	83	87	89	92	94	96	98
30	70	30	32	49	56	64	73	77	84	89	92	97	100	104	107
		10	31	48	55	62	70	73	79	83	86	90	92	95	97
	50	30	28	44	50	58	66	69	76	81	83	87	90	93	96
		10	28	44	50	57	65	68	74	79	81	85	88	91	93
0	30	31	48	55	62	70	74	80	85	87	91	94	97	99	
	10	27	44	50	57	65	68	74	79	81	85	88	91	93	
0	0	0	26	42	47	54	62	65	71	75	78	81	84	86	88