



	EL-C20030N
	EL-X0090
	AHJ




○配光曲線図 (cd/1000lm)

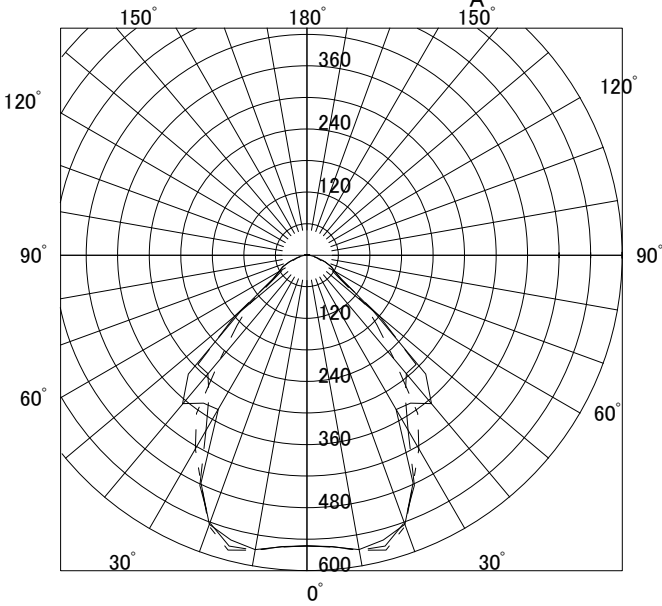

○諸特性

光源		LED22100lm N				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	4.20m	6.46m	8.91m	10.21m	
	B-B	4.40m	6.59m	8.84m	10.82m	
器具効率	上方光束	下方光束		計		
	1.5%	98.5%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

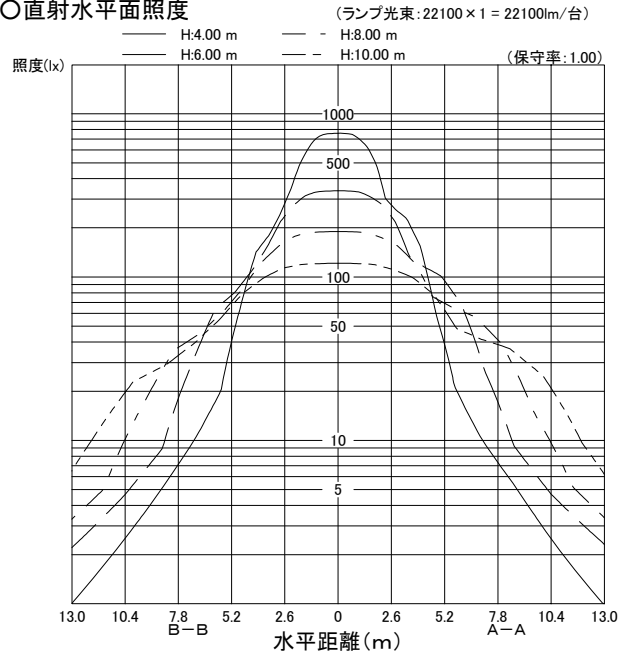

作業面照明率 (× 0.01)															
反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	54	74	83	91	99	103	109	114	116	120	122	125	127
		10	51	68	75	82	88	91	95	98	100	102	103	105	106
	50	30	42	62	70	80	89	93	101	106	110	114	118	121	124
		10	40	59	66	74	81	84	90	94	96	99	101	103	105
70	30	30	35	54	62	71	81	85	94	100	104	110	113	118	122
		10	34	53	60	68	76	79	86	90	93	96	99	101	103
	10	30	53	72	81	89	96	100	106	110	112	116	118	120	122
		10	50	67	74	81	87	89	94	97	98	101	102	103	104
50	50	30	41	61	69	78	87	91	98	103	107	111	114	117	120
		10	40	58	65	73	80	83	89	93	95	98	100	102	103
	30	30	35	54	62	71	80	84	92	98	102	107	110	114	117
		10	34	52	59	67	75	79	85	89	92	95	98	100	102
30	10	30	40	59	67	75	83	87	93	98	101	104	107	110	112
		10	39	57	64	71	79	82	87	91	93	96	97	99	101
	30	30	34	53	61	69	78	81	88	94	97	101	104	107	110
		10	34	52	59	67	74	78	83	88	90	93	96	98	100
0	0	30	34	52	59	67	76	79	85	90	93	96	99	101	103
		10	34	51	58	66	73	76	82	86	89	92	94	96	98
0	0	0	29	46	53	60	68	71	77	82	84	87	90	92	94