



	EL-C20040N
	EL-X0103
	AHN




○配光曲線図 (cd/1000lm)

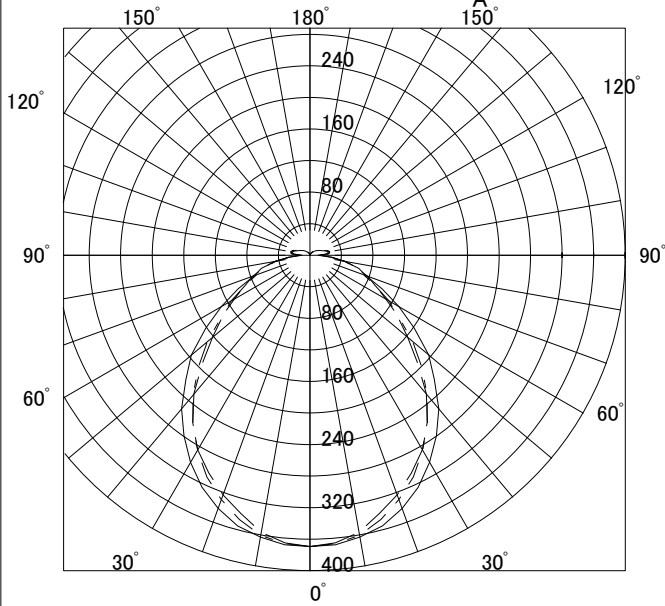

○諸特性

光源		LED17820lm N				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.82m	2.43m	3.04m	3.64m	
	B-B	1.73m	2.30m	2.88m	3.47m	
器具効率	上方光束	下方光束		計		
	8.3%	91.7%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680

○直射水平面照度

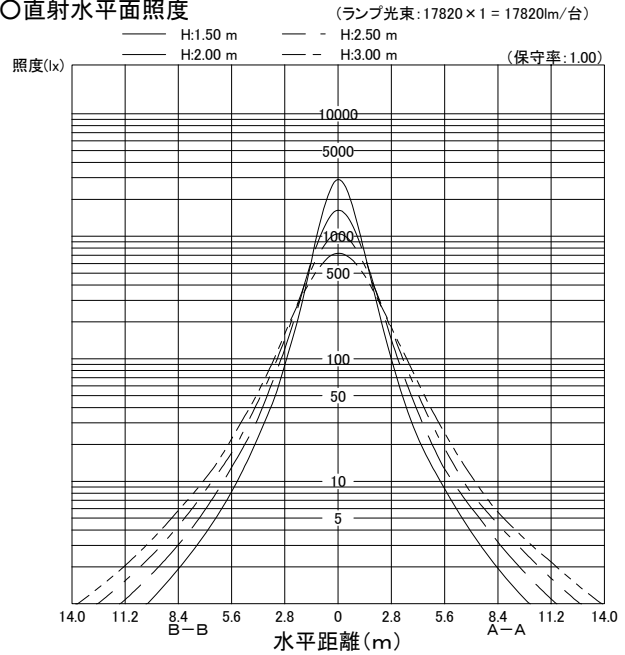

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	46	63	73	82	90	94	102	107	110	114	117	120	123
		10	43	58	66	73	80	83	89	92	94	97	99	101	103
	50	30	33	49	59	68	77	82	91	97	102	107	111	116	120
		10	32	47	55	63	70	75	81	86	89	93	96	99	101
70	70	30	26	41	50	58	68	73	83	90	95	101	106	112	116
		10	25	40	48	55	63	68	75	81	84	89	92	96	99
	50	30	21	35	42	50	58	63	70	76	80	86	89	94	97
		10	21	35	42	50	58	63	70	76	80	86	89	94	97
50	70	30	45	61	70	78	86	91	97	102	105	109	112	115	117
		10	42	57	65	71	77	81	86	90	92	95	97	99	101
	50	30	32	48	57	66	74	80	88	94	98	103	107	111	114
		10	31	46	54	62	69	73	80	84	87	91	94	97	99
30	70	30	26	40	49	57	66	71	80	87	92	98	102	107	112
		10	25	39	47	55	62	67	74	80	83	88	91	94	97
	50	30	21	34	42	49	57	62	69	75	79	84	88	92	95
		10	21	34	42	49	57	62	69	75	79	84	88	92	95
0	70	30	31	46	54	62	70	75	82	88	91	96	99	102	105
		10	30	44	52	59	66	70	76	81	84	87	90	93	95
	50	30	25	39	47	55	63	68	76	82	86	91	95	99	103
		10	24	38	46	53	61	65	72	77	80	84	87	91	94
30	30	20	34	41	48	56	60	68	73	77	82	85	89	92	
	10	20	33	40	47	55	59	66	71	75	79	82	86	89	
0	30	24	38	45	53	60	65	72	77	81	85	89	92	95	
	10	24	37	44	51	59	63	69	74	77	81	84	88	90	
0	30	20	33	40	47	55	59	66	71	75	79	82	86	89	
	10	20	33	40	47	55	59	66	71	75	79	82	86	89	
0	30	18	31	37	44	51	55	62	67	70	75	78	81	84	
	10	18	31	37	44	51	55	62	67	70	75	78	81	84	