



	EL-C20040N
	EL-X0090
	AHN




○配光曲線図 (cd/1000lm)

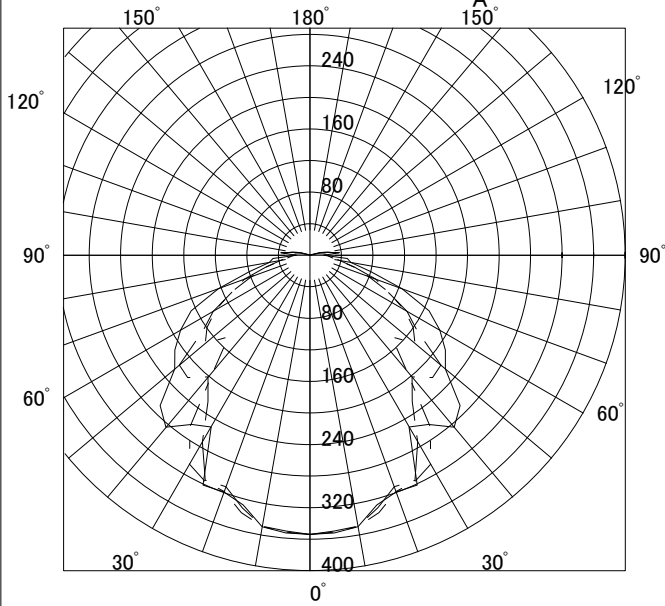

○諸特性

光源		LED20460lm N				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.66m	2.25m	2.77m	3.32m	
	B-B	1.73m	2.31m	2.89m	3.47m	
器具効率	上方光束	下方光束		計		
	3.5%	96.4%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

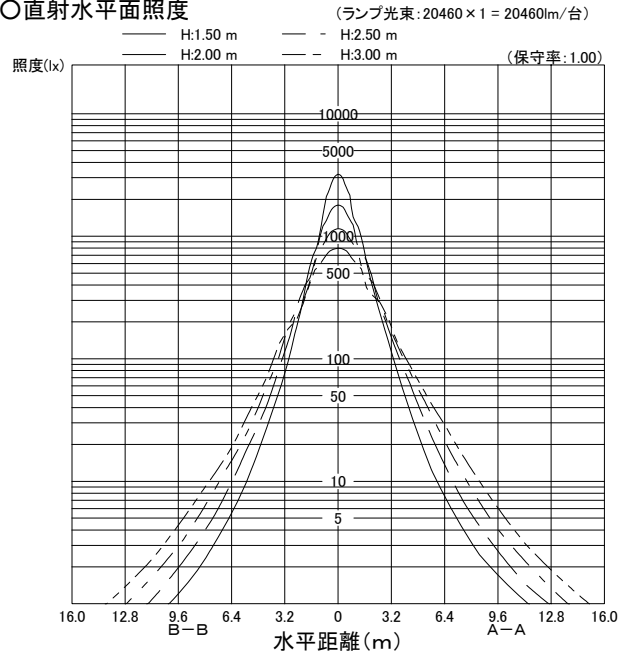

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	45	62	72	81	89	94	102	107	110	115	118	121	124
		10	42	57	66	73	79	83	89	92	95	98	100	102	104
	50	30	32	48	57	66	76	81	91	97	102	108	112	117	121
		10	31	45	54	62	69	74	81	86	89	93	96	99	102
70	70	30	44	60	70	78	86	91	98	103	106	110	113	116	119
		10	41	56	64	71	77	81	87	90	93	96	98	100	102
	50	30	31	47	56	65	74	79	88	94	98	104	108	112	116
		10	30	45	53	61	68	73	80	85	88	92	95	98	100
50	70	30	24	39	47	56	65	70	80	87	92	98	103	109	113
		10	24	37	45	53	61	66	74	79	83	88	91	95	98
	50	30	30	45	54	62	70	75	83	89	92	97	101	105	108
		10	29	43	51	59	66	70	77	82	85	89	92	95	97
30	70	30	24	38	46	54	62	68	76	83	87	93	97	102	105
		10	23	37	44	52	60	64	72	77	81	86	89	93	96
	50	30	24	38	46	54	62	68	76	83	87	93	97	102	105
30	70	30	23	37	44	52	60	65	73	79	82	88	91	95	99
		10	23	36	43	51	58	63	70	76	79	84	87	90	93
10	70	30	19	32	39	46	54	59	66	72	76	81	85	89	92
		10	19	32	39	46	54	59	66	72	76	81	85	89	92
0	0	0	17	30	36	44	51	56	63	69	73	78	81	85	88