



EL-C20040N

AHN




○配光曲線図 (cd/1000lm)

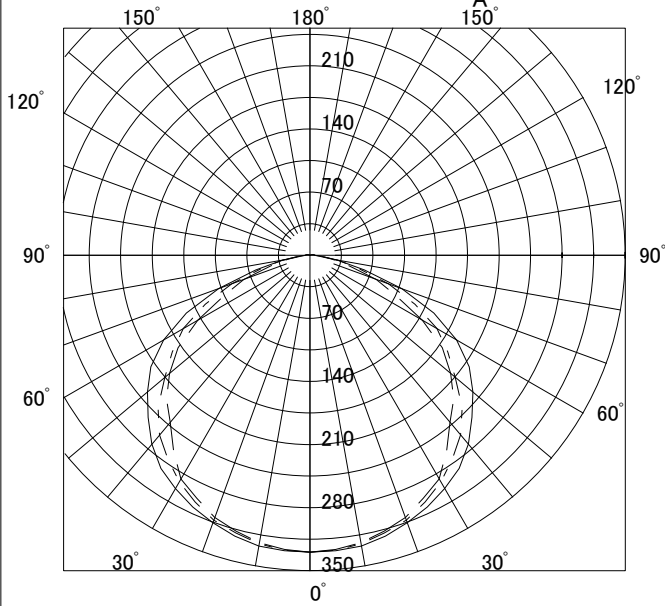

○諸特性

光源		LED22000lm N				
最大 取付 間隔	高さ	4.0m	6.0m	8.0m	10.0m	
	A-A	5.41m	8.01m	10.70m	13.02m	
	B-B	5.06m	7.65m	9.92m	12.55m	
器具効率	上方光束	下方光束		計		
	0.7%	99.3%		100.0%		
保守率	良い	0.830	普通	0.810	悪い	0.770

○直射水平面照度

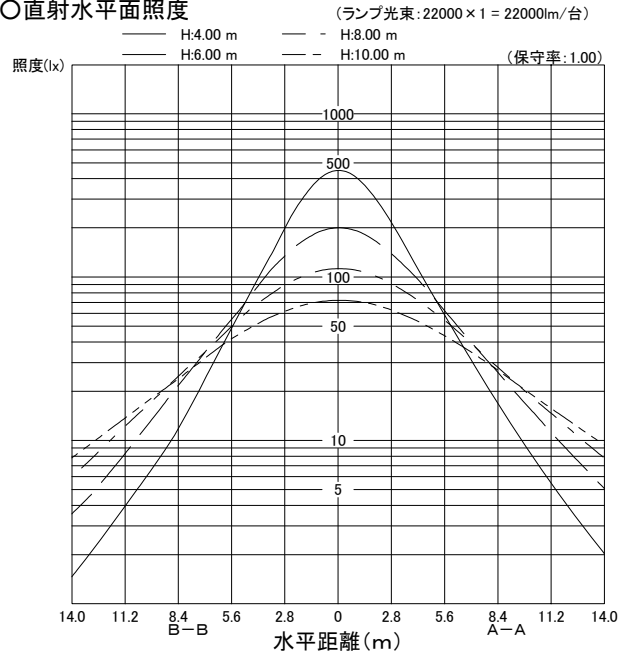

作業面照明率 (× 0.01)

反射率 (%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	45	62	73	82	90	95	103	109	112	117	120	123	125
		10	42	57	66	73	80	84	90	94	96	99	101	103	105
	50	30	31	47	58	67	77	83	92	99	104	110	114	118	122
		10	30	45	54	62	70	75	83	88	91	95	98	101	103
70	70	30	44	60	70	79	87	92	100	105	108	112	115	118	121
		10	41	56	64	72	78	82	88	92	95	98	100	102	103
	50	30	31	47	57	66	75	81	90	96	101	106	110	114	118
		10	30	44	53	61	69	74	81	86	90	94	96	100	102
50	70	30	23	38	48	57	66	72	82	89	94	101	105	111	115
		10	23	37	46	54	62	68	76	82	85	90	94	97	100
	50	30	30	45	54	63	72	77	85	91	95	100	103	107	110
		10	29	43	52	60	67	72	79	84	87	91	94	97	99
30	30	30	23	37	46	55	64	70	79	85	90	96	100	104	108
	10	23	37	45	53	61	66	74	80	84	88	92	95	98	
	10	19	32	40	48	57	62	70	76	80	86	89	94	97	
0	30	30	23	37	45	54	62	67	76	82	86	91	94	98	102
	10	10	22	36	44	52	60	65	73	78	82	87	90	93	96
0	0	0	17	30	37	45	54	59	67	73	76	82	85	89	92