


形名	EL-CE1702C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				



光源		LDA8L-G-E17/60/S					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		0.0%	80.6%	80.6%			
保守率		良い	0.660	普通	0.630	悪い	0.560


○配光曲線図 (cd/1000lm)

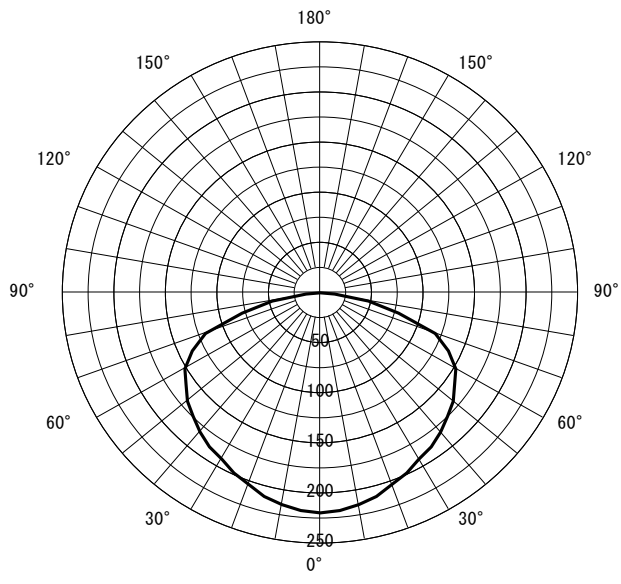

○直射水平面照度

(全光束 : 760 × 1 = 760lm/台)

照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

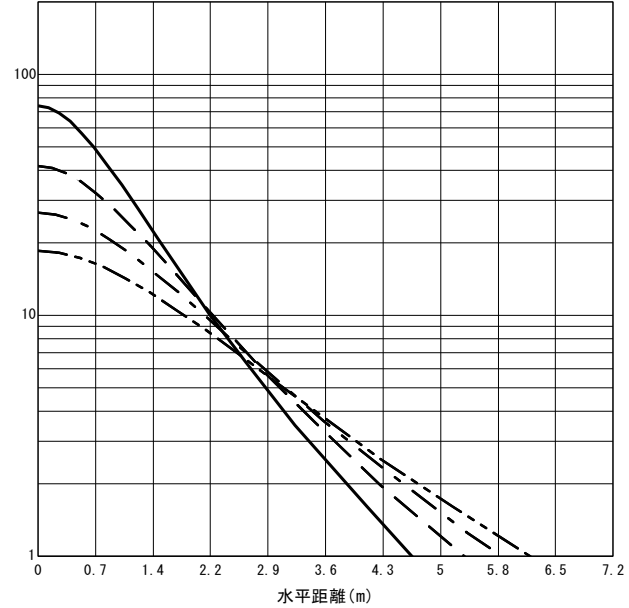

反射率 (%)																																										
天井	80				70				50				30				20	0																								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	47	43	34	33	27	26	22	21	45	42	34	32	26	26	21	21	43	40	32	31	26	25	21	21	40	38	31	30	25	25	21	21	21	19								
0.80	56	51	44	41	36	34	30	29	54	50	43	40	35	34	30	29	51	48	41	39	34	33	29	29	48	45	40	38	34	33	29	29	29	27								
1.00	63	57	51	47	42	40	36	35	61	55	50	46	42	40	36	35	57	53	47	45	41	39	36	35	53	50	45	44	40	39	35	34	34	33								
1.25	70	62	58	53	50	46	43	41	67	60	56	52	49	46	43	41	63	58	54	51	47	45	42	41	59	55	51	49	46	44	41	40	40	39								
1.50	74	65	63	57	55	51	49	46	72	64	62	57	54	51	48	46	67	61	59	55	52	50	47	46	62	59	56	53	51	49	46	45	45	43								
2.00	81	70	71	64	64	58	58	54	78	69	69	63	63	58	57	53	73	66	66	61	60	57	55	53	68	64	62	59	58	56	54	52	52	50								
2.50	85	74	77	68	70	63	64	59	82	72	75	67	68	62	63	59	76	70	70	65	65	61	61	58	72	67	67	63	63	60	59	57	57	55								
3.00	88	76	81	71	75	67	70	63	85	75	79	70	73	66	68	62	79	72	74	68	69	65	65	62	74	70	70	66	66	63	63	61	60	59								
4.00	93	79	86	75	81	71	77	68	89	77	84	74	79	71	75	68	83	75	79	72	75	69	72	67	77	73	74	70	71	68	68	66	65	63								
5.00	95	80	90	77	85	74	81	72	92	79	87	76	83	74	79	71	85	77	82	74	78	72	75	70	80	75	77	73	74	71	72	69	68	67								
7.00	98	83	94	80	91	78	87	76	94	81	91	79	88	77	85	75	88	79	85	77	83	75	80	74	82	77	80	75	78	74	76	73	72	70								
10.00	100	84	98	82	95	81	92	79	97	83	94	81	92	80	90	78	90	81	88	79	86	78	84	77	84	79	82	78	81	77	80	76	75	73								

JIS C 8030:2014

三菱電機照明株式会社