


形名	EL-CE2600C	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LDA7L-G/60/S-A					
最大 取付 間隔	高さ	H					
	A-A'	1.3 H					
	B-B'	1.3 H					
器具効率		上方光束	下方光束	計			
		15.4%	69.5%	84.9%			
保守率		良い	0.660	普通	0.630	悪い	0.560

○配光曲線図 (cd/1000lm)

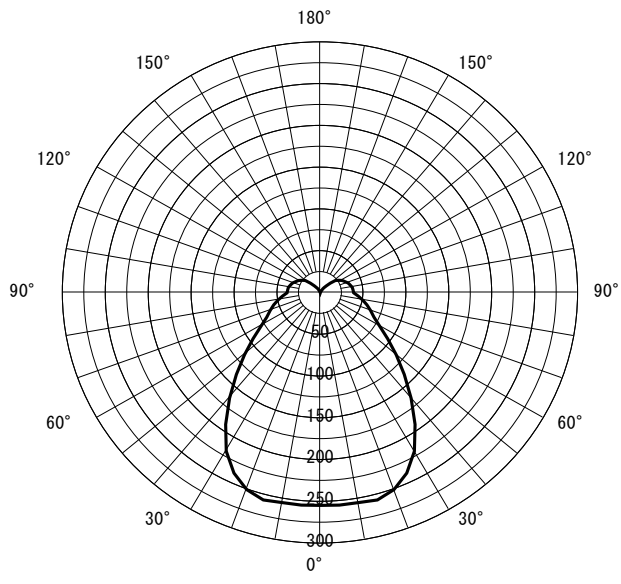

○直射水平面照度 (全光束 : 810 × 1 = 810lm/台)

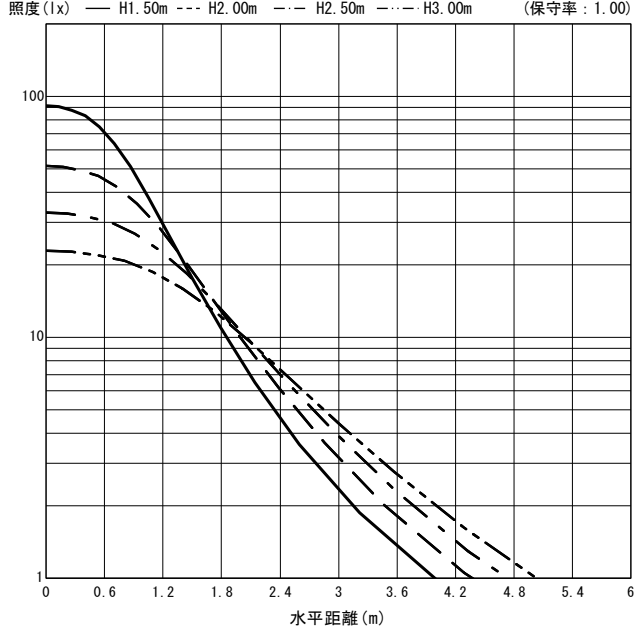

反射率 (%)																																																		
天井	80								70								50								30								20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照度 (× 0.01)																																																	
0.60	52	48	40	38	33	32	28	27	49	46	39	37	32	31	27	27	45	42	36	35	30	30	26	26	41	39	34	33	29	28	25	25	25	22																
0.80	61	55	49	46	41	40	36	35	58	53	47	45	40	39	35	34	53	49	44	42	38	37	34	33	48	46	41	40	36	35	32	32	31	29																
1.00	67	61	56	52	48	45	42	41	64	58	54	50	46	44	41	40	58	54	50	47	44	42	39	38	53	50	46	44	41	40	37	37	36	33																
1.25	73	65	62	57	54	51	49	46	70	63	60	55	53	50	47	45	63	58	55	52	49	47	45	43	57	54	51	49	46	45	42	41	40	37																
1.50	77	68	67	61	59	55	53	50	73	66	64	59	57	54	52	49	66	61	59	55	53	51	49	47	60	56	54	52	50	48	46	45	44	41																
2.00	83	73	74	66	67	61	61	57	79	70	71	64	64	59	59	55	71	65	65	60	59	56	55	53	64	60	59	56	55	53	52	50	49	45																
2.50	87	75	79	70	72	65	67	61	83	73	75	68	69	63	64	60	74	67	68	63	64	60	60	57	67	63	62	59	59	56	55	54	52	49																
3.00	90	77	83	72	76	68	71	64	85	75	79	70	73	66	68	63	76	69	71	66	67	62	63	60	68	64	65	61	61	59	58	56	55	51																
4.00	94	80	88	76	82	72	78	69	89	77	83	73	78	70	74	67	79	72	75	69	71	66	68	64	71	67	68	64	65	62	63	60	58	54																
5.00	96	81	91	78	86	75	82	72	91	79	86	76	82	73	78	70	81	73	78	71	74	68	72	66	73	68	70	66	68	64	66	63	61	57																
7.00	99	83	95	81	91	78	88	76	93	81	90	78	87	76	83	74	83	75	81	73	78	71	76	70	75	70	73	69	71	67	69	66	64	60																
10.00	101	85	98	83	95	81	92	79	96	82	93	80	90	79	88	77	85	77	83	75	81	74	80	73	76	72	75	71	73	69	72	68	66	62																

JIS C 8030:2014

三菱電機照明株式会社