



EL-CP4408N

○諸特性

光源		LED4400lm N				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.98m	2.58m	3.21m	3.84m	
	B-B	1.98m	2.58m	3.21m	3.84m	
器具効率	上方光束	下方光束		計		
	8.5%	91.4%		100.0%		
保守率	良い	0.630	普通	0.600	悪い	0.560




○配光曲線図 (cd/1000lm)

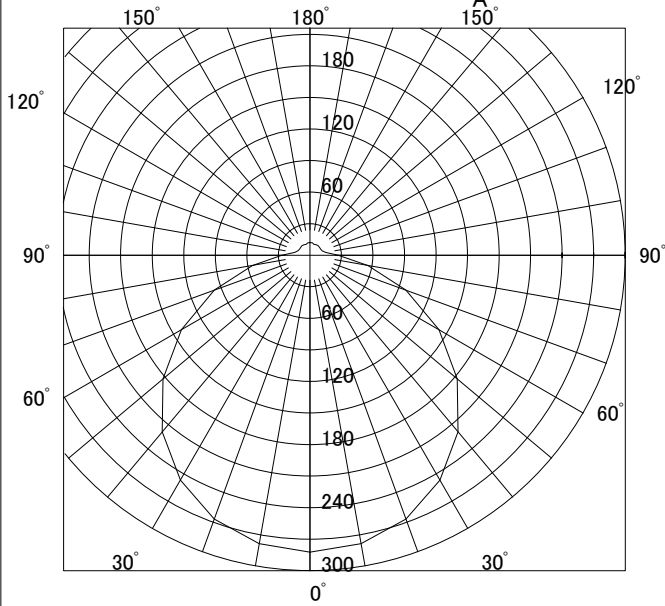

○直射水平面照度

(ランプ光束: 4400 × 1 = 4400lm/台)

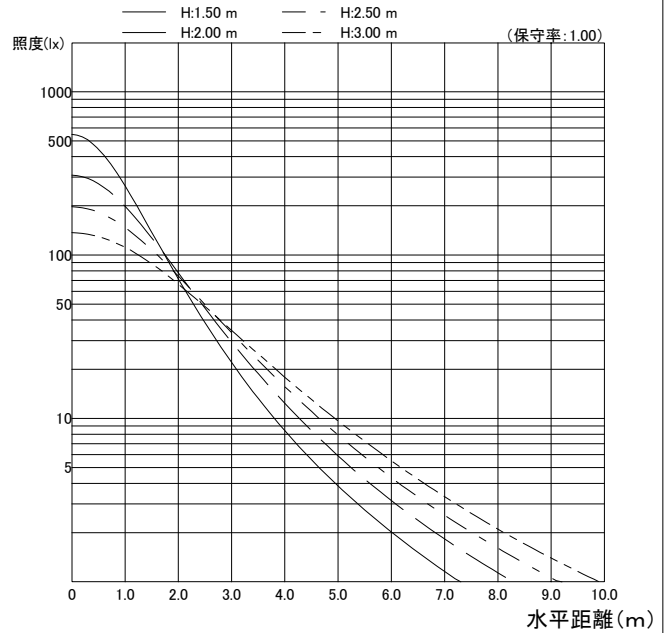

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	60	70	78	86	91	99	105	108	113	116	119	122
		10	41	55	63	70	77	81	86	90	93	96	98	100	102
	50	30	30	45	55	63	72	78	88	94	99	105	109	114	118
		10	29	43	51	59	66	71	78	83	87	91	94	97	100
70	70	30	42	57	67	75	82	87	95	100	103	108	110	114	116
		10	39	53	61	68	74	78	84	88	90	93	96	98	100
	50	30	29	44	53	61	70	76	84	91	95	101	105	109	113
		10	28	42	50	57	65	69	76	81	85	89	92	95	98
50	70	30	22	35	44	52	61	67	76	83	88	95	100	105	110
		10	22	34	42	50	58	62	70	76	80	85	88	92	96
	50	30	28	42	50	58	66	71	79	84	88	93	96	101	104
		10	27	40	48	55	62	66	73	78	81	85	88	91	94
30	70	30	21	34	42	50	58	63	72	78	82	88	92	97	101
		10	21	33	41	48	56	60	68	73	77	82	85	89	92
	50	30	17	29	36	43	51	55	63	69	73	79	82	87	90
		10	17	29	36	43	51	55	63	69	73	79	82	87	90
0	30	30	21	33	40	48	55	60	68	74	77	83	86	90	94
		10	20	32	40	47	54	58	65	71	74	79	82	86	89
0	10	30	17	28	35	42	49	54	61	67	71	76	80	84	87
		10	17	28	35	42	49	54	61	67	71	76	80	84	87
0	0	30	15	25	32	39	46	50	57	63	66	71	75	79	82
		10	15	25	32	39	46	50	57	63	66	71	75	79	82