



EL-CP5009M

○諸特性

光源		LED5000lm D+L				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.98m	2.56m	3.18m	3.81m	
	B-B	1.98m	2.56m	3.18m	3.81m	
器具効率	上方光束	下方光束		計		
		12.4%	87.6%	100.0%		
保守率	良い	0.630	普通	0.600	悪い	0.560




○配光曲線図 (cd/1000lm)

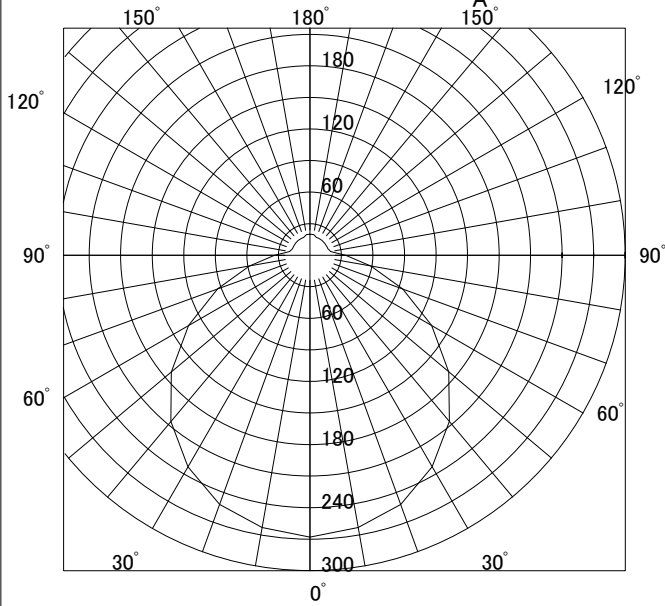

○直射水平面照度

(ランプ光束: 5000 × 1 = 5000lm/台)

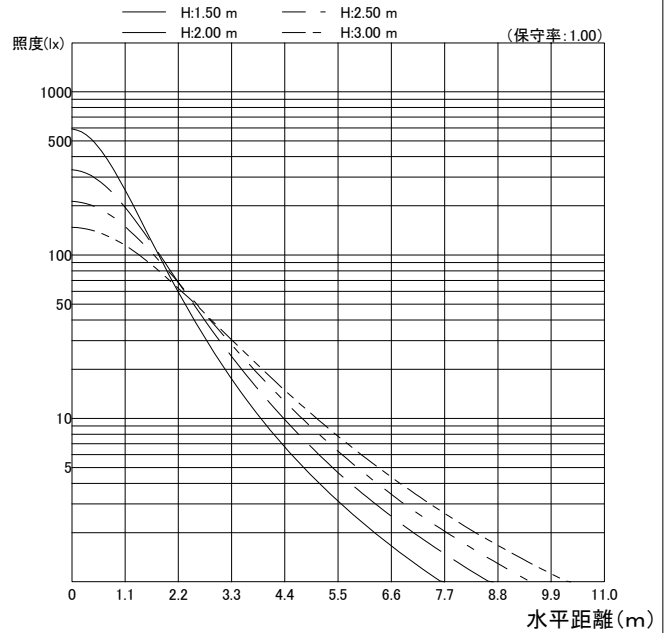

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	43	59	69	77	85	90	98	103	107	111	114	118	121
		10	40	54	62	69	76	79	85	89	92	95	97	99	101
	50	30	30	44	54	62	71	77	86	93	97	104	108	113	117
		10	29	42	50	58	65	70	77	82	85	90	93	96	99
70	30	30	22	35	44	52	61	67	77	84	90	97	102	108	113
		10	22	34	42	50	57	62	70	76	80	85	89	93	96
	10	30	17	29	36	44	51	56	65	71	75	81	85	90	94
		10	17	29	36	44	51	56	65	71	75	81	85	90	94
50	70	30	41	56	66	73	81	86	93	98	101	106	109	112	115
		10	39	52	60	67	73	77	82	86	89	92	94	96	98
	50	30	29	43	52	60	69	74	83	89	93	99	103	108	111
		10	28	41	49	56	63	68	75	80	83	87	90	94	96
30	50	30	27	40	49	56	64	69	76	82	86	91	94	98	101
		10	26	39	46	53	60	64	71	76	79	83	86	89	91
	30	30	21	33	41	48	56	61	70	76	80	86	90	95	99
		10	20	32	40	47	54	58	66	71	75	79	83	87	90
10	30	16	28	35	41	49	54	61	67	71	76	80	84	88	
	10	16	27	33	40	47	52	59	64	68	73	77	81	84	
0	0	0	14	24	30	36	43	47	54	59	63	68	71	75	78