


形名	EL-D00/1 (300MM) AHZ	電源		○諸特性
出力	連調調色	温度		
モード			(色温度可変機種) 昼白色相当	
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

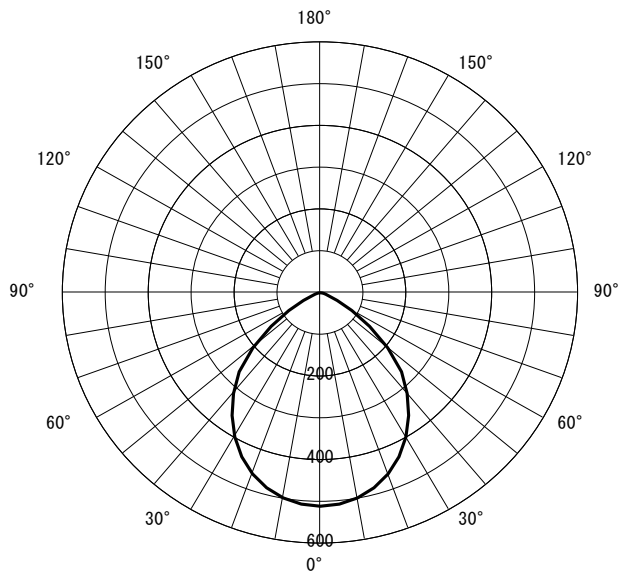

○直射水平面照度 (全光束: 1840 × 1 = 1840lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

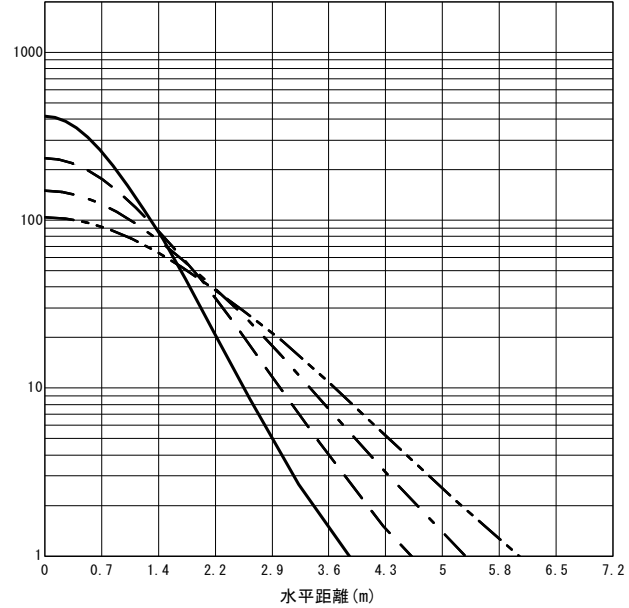

反射率 (%)																																		
天井	80								70								50								30								20	0
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	作業面照度率 (× 0.01)																																	
0.60	71	65	58	55	50	48	45	44	69	64	57	55	50	48	44	44	66	62	56	54	49	48	44	44	64	60	54	53	48	47	44	44	43	42
0.80	83	76	71	67	63	60	57	56	81	75	70	66	62	60	57	56	78	72	68	65	61	59	56	55	74	70	66	64	60	59	56	55	55	53
1.00	92	82	80	74	72	68	66	64	89	81	78	73	71	68	65	63	85	79	76	72	69	67	65	63	81	76	74	71	68	66	64	63	63	61
1.25	99	88	88	80	80	75	74	71	96	86	86	80	79	75	74	71	91	84	83	78	77	74	72	70	87	82	80	77	75	73	71	70	69	68
1.50	103	91	93	85	86	80	80	76	100	90	91	84	85	79	79	75	95	87	88	82	82	78	78	75	90	85	84	81	80	77	76	74	74	72
2.00	110	96	101	90	94	86	89	83	106	94	99	89	93	85	88	82	100	92	94	88	89	84	85	81	95	89	90	86	86	83	83	80	80	78
2.50	114	98	106	94	100	90	95	87	110	97	104	93	98	89	93	86	104	94	98	91	94	88	90	86	98	92	94	89	90	87	87	85	84	82
3.00	117	100	110	96	104	93	100	90	113	99	107	95	102	92	98	90	106	96	101	93	97	91	94	88	100	94	96	91	93	89	91	87	87	85
4.00	120	102	115	99	110	97	106	94	116	101	111	98	107	96	104	94	109	98	105	96	102	94	99	92	102	96	100	94	97	93	95	91	90	89
5.00	122	104	118	101	114	99	110	97	118	102	114	100	111	98	107	96	111	100	108	98	105	96	102	95	104	98	102	96	100	95	98	93	93	91
7.00	125	105	121	103	118	102	115	100	120	104	117	102	115	101	112	99	113	101	110	100	108	99	106	98	106	99	104	98	102	97	101	96	95	93
10.00	127	106	124	105	122	104	120	103	122	105	120	104	118	103	116	102	114	103	112	102	111	101	109	100	107	100	106	100	105	99	103	98	97	95

JIS C 8030:2014

三菱電機照明株式会社