


形名	EL-D01/1 (300MM) AHZ	電源		○諸特性
出力	連調調色	温度		
モード			(色温度可変機種)電球色相当	
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.1 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

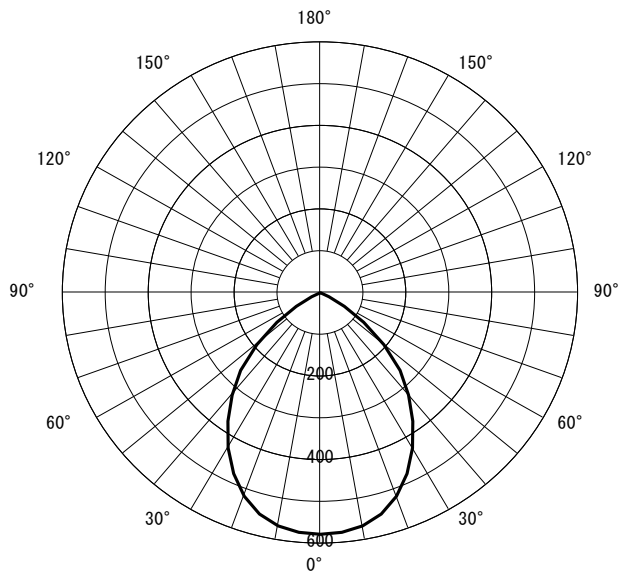

○直射水平面照度 (全光束: 1650 × 1 = 1650lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

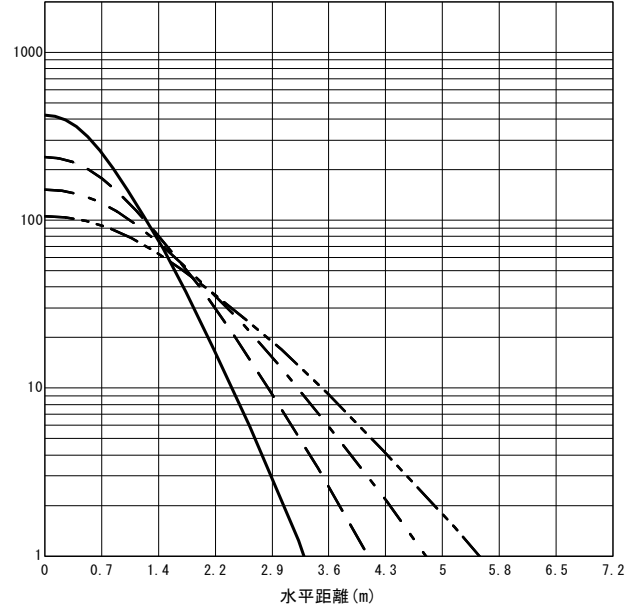

反射率 (%)																																										
天井	80								70								50								30								20	0								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0												
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																									
0.60	74	68	62	59	54	53	49	48	73	67	61	58	54	52	49	48	70	65	60	57	53	52	49	48	67	64	58	56	52	52	48	48	48	46								
0.80	86	79	75	70	67	64	62	60	84	77	74	69	66	64	61	60	81	75	72	68	65	63	61	60	78	73	70	67	64	63	60	59	59	58								
1.00	94	85	83	77	76	72	70	68	92	84	82	77	75	72	70	68	88	81	79	75	73	71	69	67	84	79	77	74	72	70	68	67	67	65								
1.25	101	90	91	83	84	78	75	75	98	89	89	83	83	78	78	74	94	86	86	81	81	77	76	74	89	84	83	80	79	76	75	73	73	72								
1.50	106	93	96	87	89	83	84	79	103	92	94	87	88	82	83	79	97	89	91	85	85	81	81	78	93	87	87	84	83	80	80	78	77	76								
2.00	112	97	104	93	97	89	92	86	108	96	101	92	96	88	91	85	102	94	97	90	92	87	88	84	97	91	93	88	89	86	86	84	83	82								
2.50	115	100	108	96	103	92	98	90	112	98	106	95	101	92	96	89	105	96	101	93	97	90	93	88	100	94	96	91	93	89	90	87	87	85								
3.00	118	101	112	98	107	95	102	92	114	100	109	97	104	94	100	92	107	98	103	95	100	93	96	91	102	95	98	93	95	91	93	90	89	87								
4.00	121	103	116	101	112	98	108	96	117	102	113	100	109	97	106	95	110	100	107	98	104	96	101	94	104	97	101	96	99	94	97	93	92	90								
5.00	123	104	119	102	115	100	112	98	119	103	115	101	112	99	109	98	111	101	109	99	106	98	104	96	105	99	103	97	101	96	99	95	94	92								
7.00	126	106	122	104	119	103	117	101	121	104	118	103	116	102	114	100	113	102	111	101	109	100	107	99	106	100	105	99	103	98	102	97	96	94								
10.00	127	107	125	105	123	104	121	103	123	105	121	104	119	103	117	102	115	103	113	102	112	101	110	101	107	101	106	100	105	99	104	99	98	96								

JIS C 8030:2014

三菱電機照明株式会社