


形名	EL-D05/3 (300MM) AHZ	電源		○諸特性
出力	連調調色	温度		
モード			(色温度可変機種) 白色相当	
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.2 H					
	B-B'	1.2 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

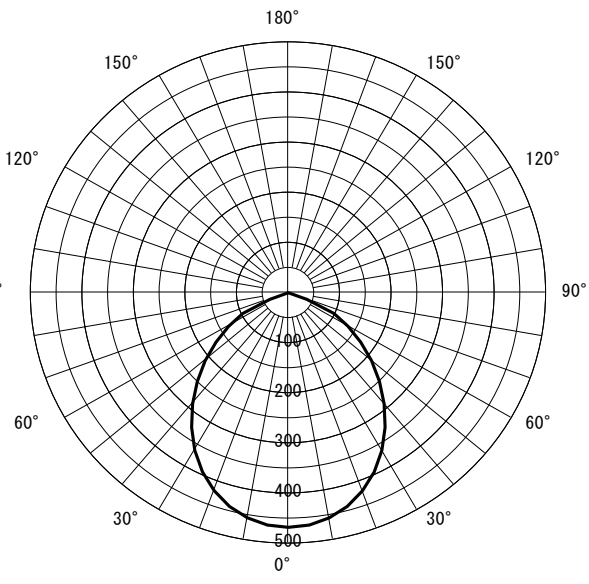

○直射水平面照度 (全光束 : 3490 × 1 = 3490lm/台)
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率 : 1.00)

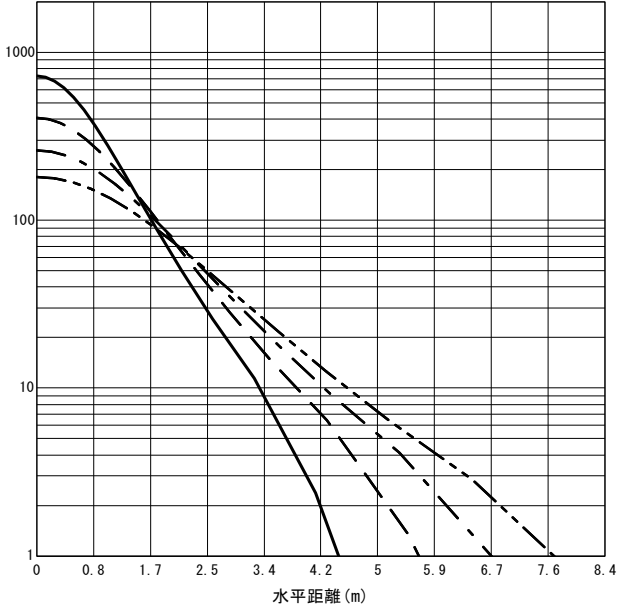

反射率 (%)																																																		
天井	80								70								50								30								20	0																
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照明率 (× 0.01)																																																	
0.60	68	63	55	52	46	45	41	40	67	62	54	52	46	45	41	40	64	60	53	51	46	44	41	40	61	58	51	50	45	44	40	40	40	40	40	38														
0.80	81	73	68	63	59	57	53	52	79	72	67	63	59	56	53	52	75	70	65	62	57	56	52	51	71	67	63	60	56	55	52	51	51	51	49															
1.00	89	80	77	71	68	65	62	60	87	79	75	70	67	64	62	60	82	76	73	69	66	64	61	59	78	74	70	68	64	63	60	59	59	57																
1.25	97	86	85	78	77	72	71	68	94	84	83	77	76	72	70	67	89	82	80	76	74	71	69	67	84	79	77	74	72	70	68	66	66	64																
1.50	102	90	91	83	83	77	77	73	99	88	89	82	82	77	76	73	93	86	85	80	79	76	75	72	88	83	82	78	77	75	73	71	71	69																
2.00	109	95	100	89	93	84	87	81	105	93	97	88	91	84	86	80	99	91	93	86	87	82	83	79	94	88	89	84	84	81	81	79	78	76																
2.50	113	97	105	93	99	89	93	85	109	96	102	92	97	88	92	85	103	94	97	90	93	87	89	84	97	91	93	88	89	85	86	83	83	81																
3.00	116	99	109	95	103	92	98	89	112	98	106	94	101	91	96	88	105	96	100	92	96	90	93	87	99	93	95	91	92	88	89	86	86	84																
4.00	120	102	114	99	109	96	105	93	116	100	111	98	106	95	103	93	108	98	104	96	101	93	98	91	102	96	99	94	96	92	94	90	90	88																
5.00	122	103	117	101	113	98	109	96	118	102	114	100	110	97	107	96	110	99	107	98	104	96	102	94	103	97	101	96	99	94	97	93	92	90																
7.00	125	105	121	103	118	101	115	100	120	104	117	102	114	100	112	99	112	101	110	100	108	98	106	97	105	99	104	98	102	97	100	96	95	93																
10.00	127	106	124	105	122	103	119	102	122	105	120	104	118	102	116	101	114	102	112	101	111	100	109	99	107	100	105	99	104	98	103	98	97	95																

JIS C 8030:2014

三菱電機照明株式会社