



EL-D0533WW/3W	
AHZ	



○配光曲線図 (cd/1000lm)

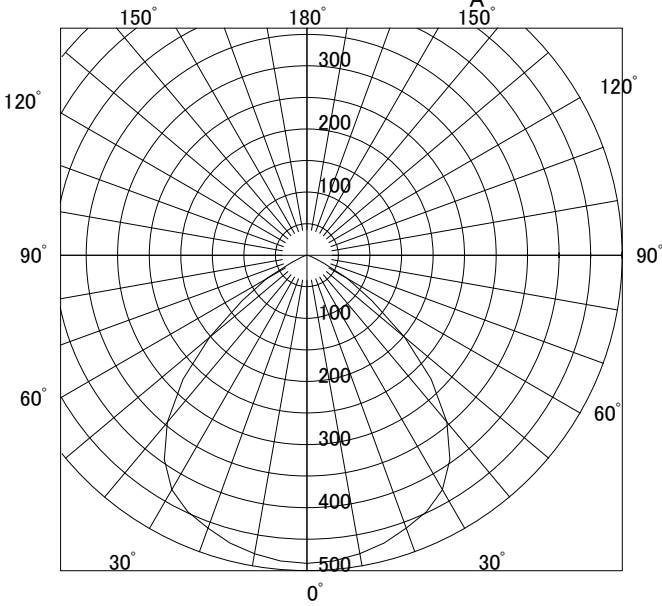


○諸特性

光源		LED460lm WW				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.92m	2.56m	3.20m	3.84m	
	B-B	1.92m	2.56m	3.20m	3.84m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.820	普通	0.770	悪い	0.690

○直射水平面照度

(ランプ光束: 460 × 1 = 460lm/台)

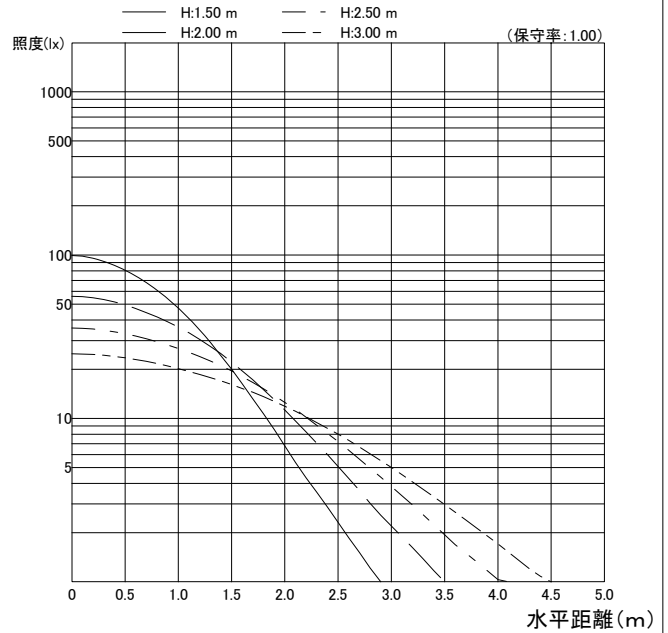

作業面照明率(×0.01)															
反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	52	72	82	91	99	104	110	115	117	120	123	125	127
		10	49	67	75	82	88	91	96	99	100	102	104	105	106
	50	30	40	59	70	79	89	94	102	107	111	115	118	121	124
		10	38	57	65	73	81	85	91	95	97	100	101	103	105
70	30	30	33	52	61	71	81	86	95	101	105	110	114	118	121
		10	32	50	59	67	76	80	87	91	94	97	99	102	103
	50	30	39	59	68	78	87	92	99	104	108	112	114	117	120
		10	38	56	65	73	81	84	90	94	96	99	100	102	103
50	30	30	32	51	61	70	80	85	93	99	103	107	111	115	118
		10	32	50	59	67	76	79	86	90	93	96	98	101	102
	50	30	38	57	66	75	84	88	95	99	102	105	108	110	112
		10	37	55	63	71	79	83	88	92	94	97	98	100	101
30	30	30	32	51	60	69	78	82	90	95	98	102	105	108	110
		10	31	50	58	66	75	78	85	89	91	95	97	99	100
	10	10	28	46	54	62	71	75	82	87	89	93	95	97	99
0	30	30	32	50	59	67	76	80	87	92	94	98	100	102	104
		10	31	49	57	66	74	78	84	88	90	93	95	97	98
0	0	0	26	44	52	60	69	73	79	84	86	89	91	93	95