


形名	EL-D06/2 (152NM) AHN	電源		○諸特性
出力	固定出力	温度		
モード				
オプション1				
オプション2				
オプション3				
オプション4				
オプション5				




光源		LED					
最大 取付 間隔	高さ	H					
	A-A'	1.1 H					
	B-B'	1.1 H					
器具効率		上方光束	下方光束	計			
		0.0%	100.0%	100.0%			
保守率		良い	0.810	普通	0.770	悪い	0.680

○配光曲線図 (cd/1000lm)

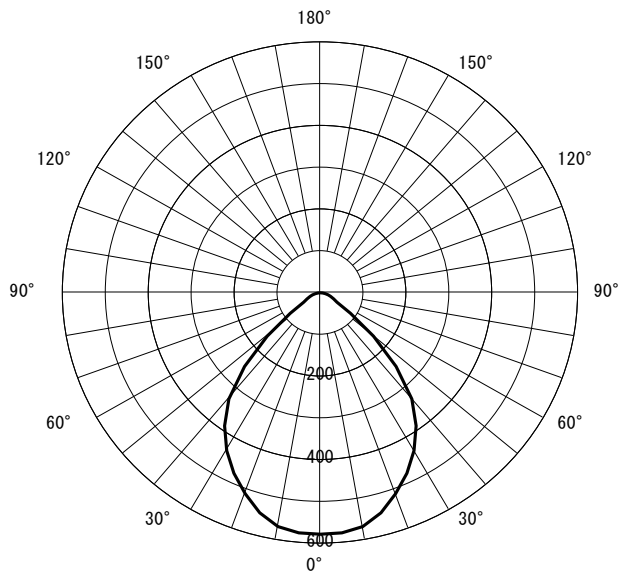

○直射水平面照度 (全光束: 1500 × 1 = 1500lm/台)

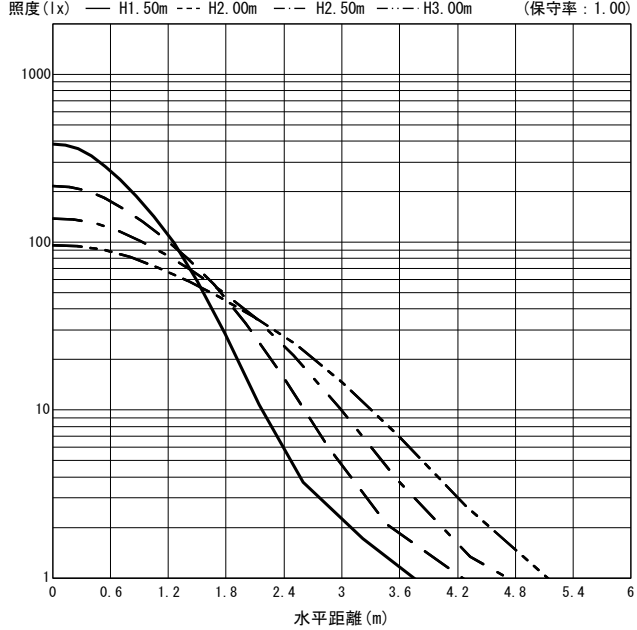

反射率 (%)																																										
天井	80				70				50				30				20	0																								
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	10	0																				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
室指数	作業面照度 (× 0.01)																																									
0.60	74	68	62	59	54	53	49	48	73	67	61	58	54	52	49	48	70	65	60	57	53	52	49	48	67	64	58	56	52	52	48	48	48	46								
0.80	86	78	74	70	66	64	61	59	84	77	73	69	66	63	61	59	80	75	71	68	65	63	60	59	77	73	69	67	64	62	60	59	59	57								
1.00	94	84	83	77	75	71	69	67	91	83	81	76	74	71	69	67	87	81	79	75	73	70	68	66	83	79	76	73	71	69	67	66	66	64								
1.25	100	89	90	82	82	77	77	73	98	88	88	82	81	77	76	73	93	86	85	80	79	76	75	73	89	83	82	79	77	75	74	72	72	70								
1.50	105	92	95	86	88	82	82	78	102	91	93	85	87	81	82	78	96	89	90	84	84	80	80	77	92	86	86	82	82	79	78	76	76	74								
2.00	111	96	102	91	96	87	91	84	107	95	100	91	94	87	89	84	101	93	96	89	91	86	87	83	96	90	92	87	88	84	84	82	82	80								
2.50	115	99	107	95	101	91	97	88	111	98	105	94	99	91	95	88	104	95	99	92	95	89	92	87	99	93	95	90	92	88	89	86	85	84								
3.00	117	101	111	97	105	94	101	91	113	99	108	96	103	93	99	91	107	97	102	94	98	92	95	89	101	95	97	92	94	90	92	88	88	86								
4.00	121	103	115	100	111	97	107	95	117	101	112	99	108	96	104	94	109	99	106	97	103	95	100	93	103	97	100	95	98	93	96	92	91	89								
5.00	123	104	118	102	114	99	111	98	118	103	115	100	111	99	108	97	111	100	108	98	105	97	103	95	104	98	102	96	100	95	98	94	93	91								
7.00	125	105	122	104	119	102	116	100	121	104	118	102	115	101	113	100	113	102	111	100	109	99	107	98	106	99	104	98	103	97	101	96	96	94								
10.00	127	106	125	105	122	104	120	103	122	105	120	104	118	103	116	102	114	103	113	102	111	101	110	100	107	101	106	100	105	99	104	98	97	96								

JIS C 8030:2014

三菱電機照明株式会社