


|        |                      |    |                |      |
|--------|----------------------|----|----------------|------|
| 形名     | EL-D09/3 (300MM) AHZ | 電源 |                | ○諸特性 |
| 出力     | 連調调色                 | 温度 |                |      |
| モード    |                      |    | (色温度可変機種)電球色相当 |      |
| オプション1 |                      |    |                |      |
| オプション2 |                      |    |                |      |
| オプション3 |                      |    |                |      |
| オプション4 |                      |    |                |      |
| オプション5 |                      |    |                |      |




|                |      |       |        |        |       |    |       |
|----------------|------|-------|--------|--------|-------|----|-------|
| 光源             |      | LED   |        |        |       |    |       |
| 最大<br>取付<br>間隔 | 高さ   | H     |        |        |       |    |       |
|                | A-A' | 0.6 H |        |        |       |    |       |
|                | B-B' | 0.6 H |        |        |       |    |       |
| 器具効率           |      | 上方光束  | 下方光束   | 計      |       |    |       |
|                |      | 0.0%  | 100.0% | 100.0% |       |    |       |
| 保守率            |      | 良い    | 0.810  | 普通     | 0.770 | 悪い | 0.680 |

○配光曲線図 (cd/1000lm)

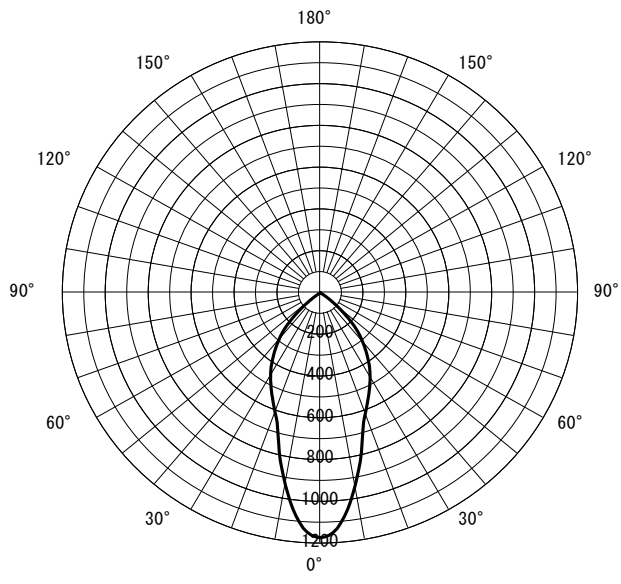

○直射水平面照度 (全光束: 1660 × 1 = 1660lm/台)  
照度 (lx) — H1.50m --- H2.00m - - - H2.50m - · - · H3.00m (保守率: 1.00)

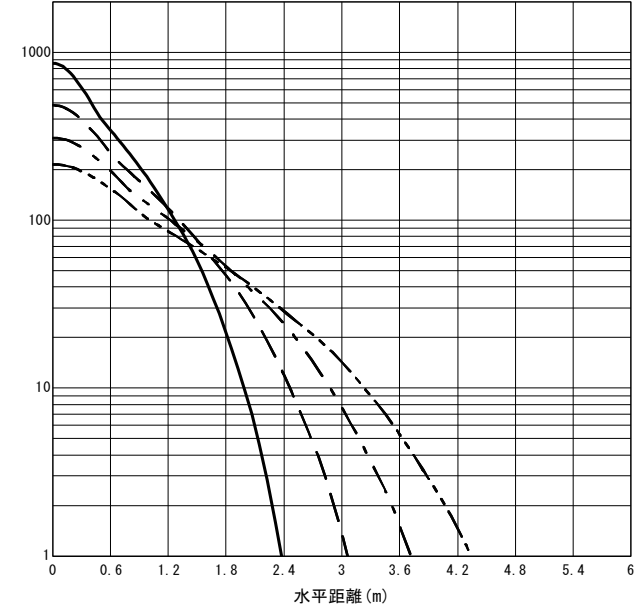

| 反射率 (%) |                 |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |
|---------|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|
| 天井      | 80              |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     | 30  |     |     |     |     |     |     |    | 20 | 0  |
| 壁       | 70              | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 10  | 0   |     |     |     |     |     |    |    |    |
| 床       | 30              | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10 | 0  |
| 室指数     | 作業面照度率 (× 0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |
| 0.60    | 78              | 72  | 66  | 63  | 59  | 57  | 54  | 54  | 77  | 71  | 66  | 63  | 59  | 57  | 54  | 53  | 74  | 69  | 64  | 62  | 58  | 57  | 54  | 53  | 71  | 68  | 63  | 61  | 58  | 57  | 54  | 53 | 53 | 52 |
| 0.80    | 90              | 81  | 79  | 74  | 71  | 68  | 66  | 65  | 88  | 80  | 77  | 73  | 71  | 68  | 66  | 64  | 84  | 78  | 76  | 72  | 70  | 68  | 65  | 64  | 81  | 77  | 74  | 71  | 69  | 67  | 65  | 64 | 64 | 62 |
| 1.00    | 97              | 87  | 86  | 80  | 79  | 75  | 74  | 72  | 95  | 86  | 85  | 80  | 79  | 75  | 74  | 71  | 91  | 84  | 83  | 78  | 77  | 74  | 73  | 71  | 87  | 82  | 80  | 77  | 76  | 74  | 72  | 71 | 71 | 69 |
| 1.25    | 103             | 92  | 94  | 86  | 87  | 81  | 81  | 78  | 101 | 91  | 92  | 85  | 86  | 81  | 81  | 77  | 96  | 88  | 89  | 84  | 83  | 80  | 79  | 77  | 92  | 86  | 86  | 82  | 82  | 79  | 78  | 76 | 76 | 75 |
| 1.50    | 107             | 95  | 99  | 89  | 92  | 85  | 87  | 82  | 105 | 94  | 97  | 89  | 91  | 85  | 86  | 82  | 99  | 91  | 93  | 87  | 88  | 84  | 84  | 81  | 95  | 89  | 90  | 86  | 86  | 83  | 82  | 80 | 80 | 79 |
| 2.00    | 113             | 98  | 105 | 94  | 99  | 91  | 95  | 88  | 110 | 97  | 103 | 93  | 98  | 90  | 93  | 87  | 104 | 95  | 99  | 92  | 94  | 89  | 91  | 87  | 99  | 93  | 95  | 90  | 91  | 88  | 88  | 86 | 85 | 84 |
| 2.50    | 117             | 101 | 110 | 97  | 105 | 94  | 100 | 92  | 113 | 99  | 107 | 96  | 102 | 93  | 98  | 91  | 107 | 97  | 102 | 94  | 98  | 92  | 95  | 90  | 101 | 95  | 98  | 93  | 95  | 91  | 92  | 89 | 88 | 87 |
| 3.00    | 119             | 102 | 113 | 99  | 108 | 96  | 104 | 94  | 115 | 101 | 110 | 98  | 106 | 96  | 102 | 93  | 108 | 99  | 105 | 96  | 101 | 94  | 98  | 92  | 103 | 96  | 100 | 94  | 97  | 93  | 95  | 91 | 91 | 89 |
| 4.00    | 122             | 104 | 117 | 101 | 113 | 99  | 109 | 97  | 118 | 103 | 114 | 100 | 110 | 98  | 107 | 97  | 111 | 100 | 108 | 98  | 105 | 97  | 102 | 95  | 105 | 98  | 102 | 97  | 100 | 95  | 98  | 94 | 93 | 92 |
| 5.00    | 124             | 105 | 120 | 103 | 116 | 101 | 113 | 100 | 120 | 104 | 116 | 102 | 113 | 100 | 110 | 99  | 112 | 101 | 110 | 100 | 107 | 99  | 105 | 97  | 106 | 99  | 104 | 98  | 102 | 97  | 100 | 96 | 95 | 93 |
| 7.00    | 126             | 106 | 123 | 105 | 120 | 103 | 118 | 102 | 122 | 105 | 119 | 104 | 117 | 102 | 114 | 101 | 114 | 103 | 112 | 101 | 110 | 100 | 108 | 99  | 107 | 100 | 105 | 99  | 104 | 99  | 103 | 98 | 97 | 95 |
| 10.00   | 128             | 107 | 126 | 106 | 123 | 105 | 121 | 104 | 123 | 106 | 121 | 105 | 119 | 104 | 118 | 103 | 115 | 103 | 114 | 103 | 112 | 102 | 111 | 101 | 108 | 101 | 107 | 101 | 106 | 100 | 105 | 99 | 99 | 97 |

JIS C 8030:2014

三菱電機照明株式会社